
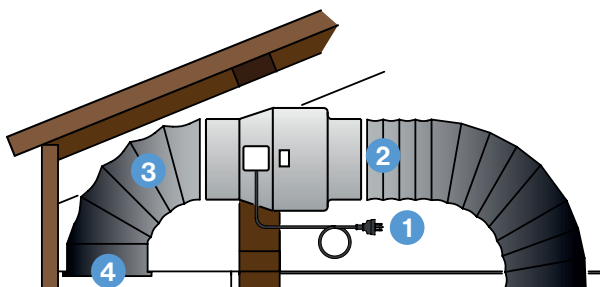


TECHNICAL SHEET



REMOTE MOTOR SOLUTIONS

In-roof motor solution
765 m³/h - 1140 m³/h



- 1. Fan power supply (attached to internal hood unit)**
- 2. 200mm flexi duct installed between rangehood and motor inlet***
- 3. 200mm flexi duct installed between motor outlet and wall/eave vent**
- 4. Vent installed in eave position**

**Advise to include gentle bend in duct run as well ensuring ducting is pulled tight and excess removed.*

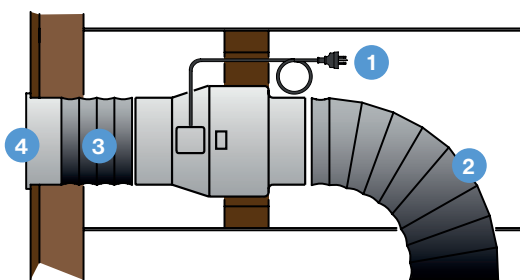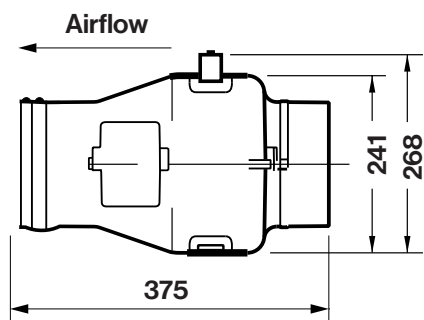

- 1. Fan power supply (attached to internal hood unit)**
- 2. 200mm flexi duct installed between rangehood and motor inlet***
- 3. 200mm flexi duct installed between motor outlet and wall/eave vent**
- 4. Vent installed in wall position**

**Advise to include gentle bend in duct run as well ensuring ducting is pulled tight and excess removed.*