

GRUPPO INCASSO PLUS NRS

Version

Plus - Built-in - 50 cm - Inox - 800 m³/h

Collection

Silence - NRS

EAN code

8034122367200



*Photograph is for information purposes only
It may not correspond to the selected version.*

FEATURES

NRS technology for a quieter kitchen
Electronic control
Metallic grease filter, removable and washable
Remote control included
Dimmable lighting
Dynamic Light (2700K - 5600K)
Dialogue system with auto mode
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024

OPTIONAL ACCESSORIES

KACL.1039

Carbon.Zeo Microtech filter

TECHNICAL FEATURES

Installation type
Built-in

Dimensions
50 cm

Finishing
Scotch brite stainless steel (AISI 304)

Motor
800 m³/h

Type of control
Electronic control

Speed
3 + boost

Lighting
Led 2x1,7 W - 2700 K / 5600 K

Minimum distance
Gas hob: 63 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
26.2 kg

Net weight
21.6 kg

Volumes
0.26 m³

Packaging size
Length
950 mm
Height
410 mm
Depth
655 mm


CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W

Voltage
220-240V

Frequency
50-60Hz

ENERGY CLASS
A



GRUPPO INCASSO PLUS NRS

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h


Collection

Silence - NRS

EAN code

8034122367200

ENERGY LABEL

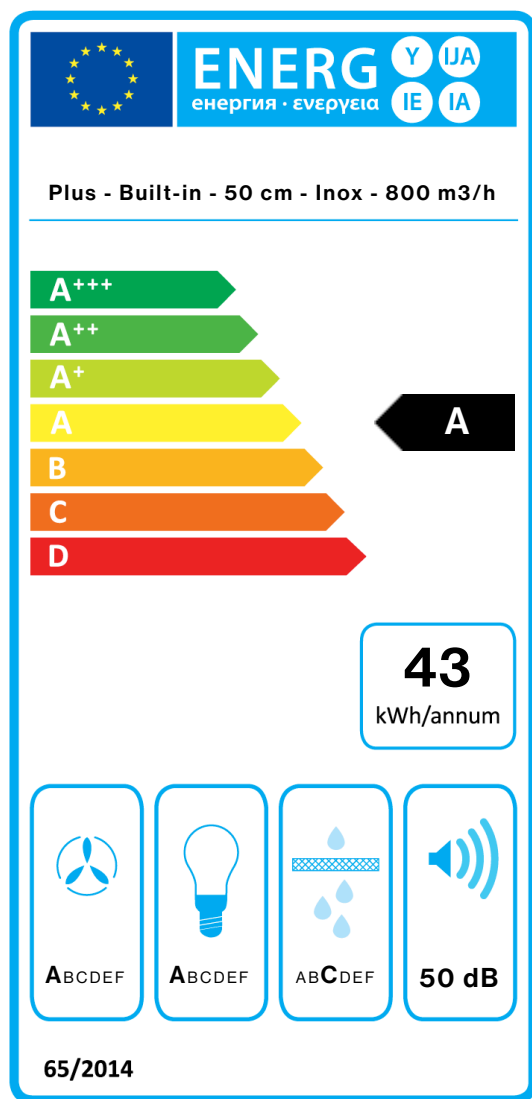

PF		
S	Falmec Spa	
M	Plus - Built-in - 50 cm - Inox - 800 m ³ /h	
AEC	43,0	kWh/a
EEC	A	
FDE	30,7	
FDEC	A	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	270,0	m ³ /h
Qmax	495,0	m ³ /h
Qboost	604,0	m ³ /h
SPEmin	38	dBa
SPEmax	50	dBa
SPEboost	57	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	50,6	
Qbep	366,0	m ³ /h
Pbep	372	Pa
Qboost	604,0	m ³ /h
Wbep	123,0	W
WL	3,50	W
Emiddle	115	lux
Lwa-SPEmax	50	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.