

GRUPPO INCASSO PLUS NRS

Plus NRS - Built-in 50 cm - Inox
- 800 m³/h

Silence - NRS

8034122367200



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

NRS technology for a quieter kitchen
Electronic control
Metallic grease filter, removable and washable
Remote control included
Dimmable led lighting
Dynamic LED Light
Dialogue system
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPTIONAL ACCESSORIES

KACL.1039

Carbon.Zeo Microtech filter

TECHNICAL FEATURES

Installation type
|montuota
Dimensions
50 cm
Finishing
Scotch brite stainless steel (AISI
304)
Motor
800 m³/h
Type of control
Electronic control
Speed settings
3 + boost
Lighting
Led 2x1,7 W - 2700 K / 5600 K


: 63 cm
: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

26.2 kg
21.6 kg
0.26 m³
950 mm
410 mm
655 mm

CONSUMPTION AND CONNECTION FEATURES

280 W
220-240V
50-60Hz
A




GRUPPO INCASSO PLUS NRS

Plus NRS - Built-in 50 cm - Inox
- 800 m³/h

Silence - NRS

8034122367200

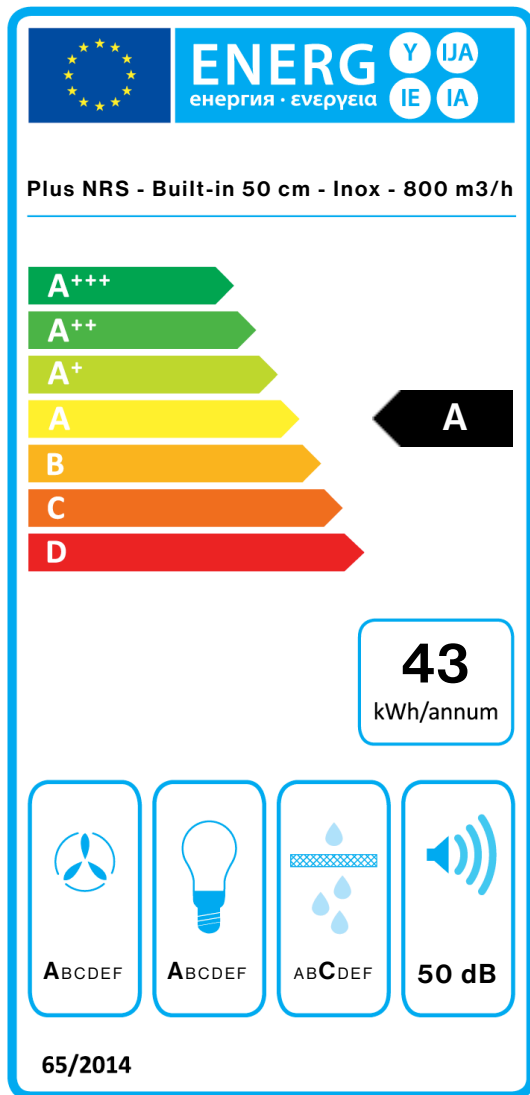

PF		
S	Falmec Spa	
M	Plus NRS - Built-in 50 cm - Inox - 800 m ³ /h	
AEC	43,0	kWh/a
EEC	A	
FDE	30,7	
FDEC	A	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	270,0	m ³ /h
Qmax	495,0	m ³ /h
Qboost	604,0	m ³ /h
SPEmin	38	dBa
SPEmax	50	dBa
SPEboost	57	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	50,6	
Qbep	366,0	m ³ /h
Pbep	372	Pa
Qboost	604,0	m ³ /h
Wbep	123,0	W
WL	3,50	W
Emiddle	115	lux
Lwa-SPEmax	50	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.