

GRUPPO PRO PLUS

Indbyg skab - 80 cm - Stål -
950 m³/h

Sortiment

Professional

EAN Kode

8034122367545



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Elektronisk kontrolpanel
Tilvalg fjernbetjening
Professional Baffle Filters
Dæmpbart LED-lys
Dynamic LED Light (2700K -
5600K)
Liquid collector
Mulighed for Connection
kogeplade

MULIGHEDER FOR TILVALG

01-FJERN

Fjernbetjening med display

TEKNISK BESKRIVELSE

Installation
Integreret emhætte

Dimensioner
80 cm

Materiale
Scotch brite rustfrit stål (AISI
304)

Motor
1000 m³/h

Betjening
Elektronisk kontrolpanel

Hastighed
3 + boost

Belysning
Led 2x1,8 W - 2700 K / 5600 K

Minimumsafstand
Gaskomfur: 60 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
16 kg

Nettovægt
13 kg

Volumen
0.17 m³

Mål på emballage
Længde
950 mm
Højde
440 mm
Dybde
395 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug
320 W

Spænding
220-240V

Frekvens
50-60Hz

DATABLAD MOTOR


Maksimal kapacitet
860 m³/h
I.E.C. 61591

Maksimalt støjniveau
69 dB(A)re1pW
I.E.C.60704-2-13

Maksimalt tryk (Pa)
600 Pa

Maksimal sugestyrke
260 W

ENERGIKLASSE
A



GRUPPO PRO PLUS

Indbyg skab - 80 cm - Stål -
950 m³/h

Sortiment

Professional


EAN Kode

8034122367545

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	53	58	64	69
Kapacitet (m ³ /h) I.E.C.61591	350	470	620	860
Maksimalt tryk (Pa)	500	540	560	600
Forbrug (W)	185	215	240	260
Luftudtag	150	150	150	150

KAPACITET / TRYK

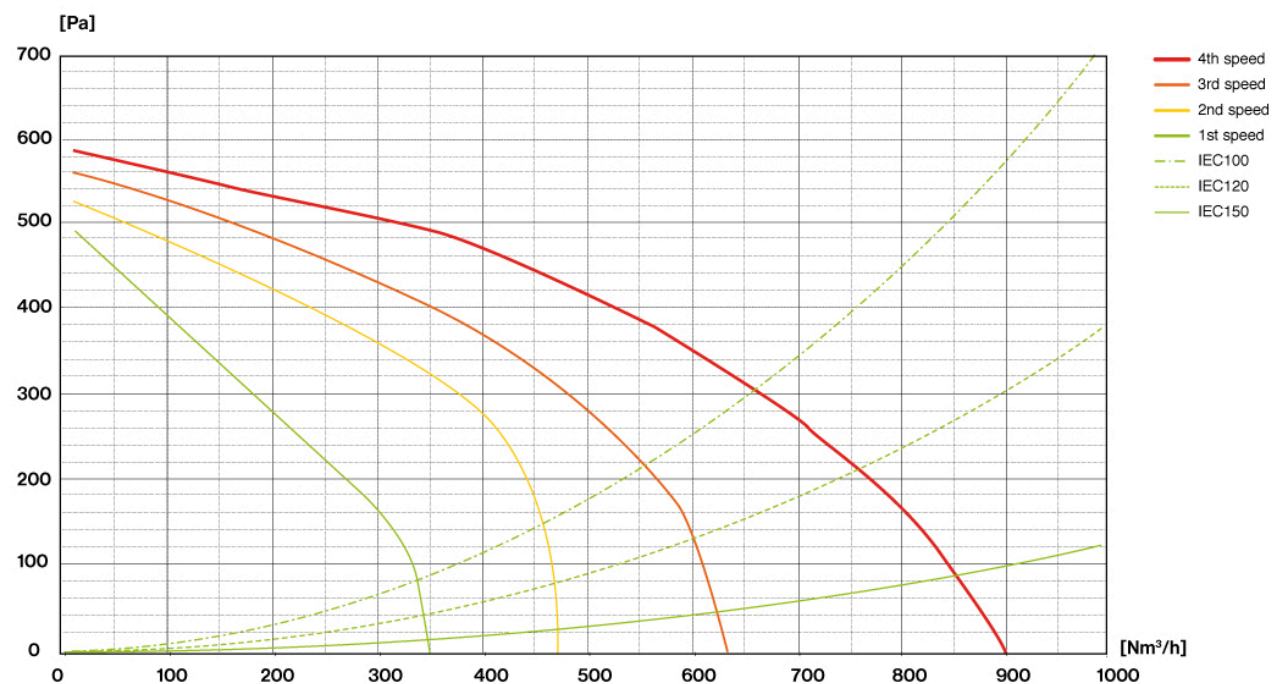

GRUPPO PRO PLUS


Indbyg skab - 80 cm - Stål -
950 m³/h

Sortiment

Professional

EAN Kode

8034122367545

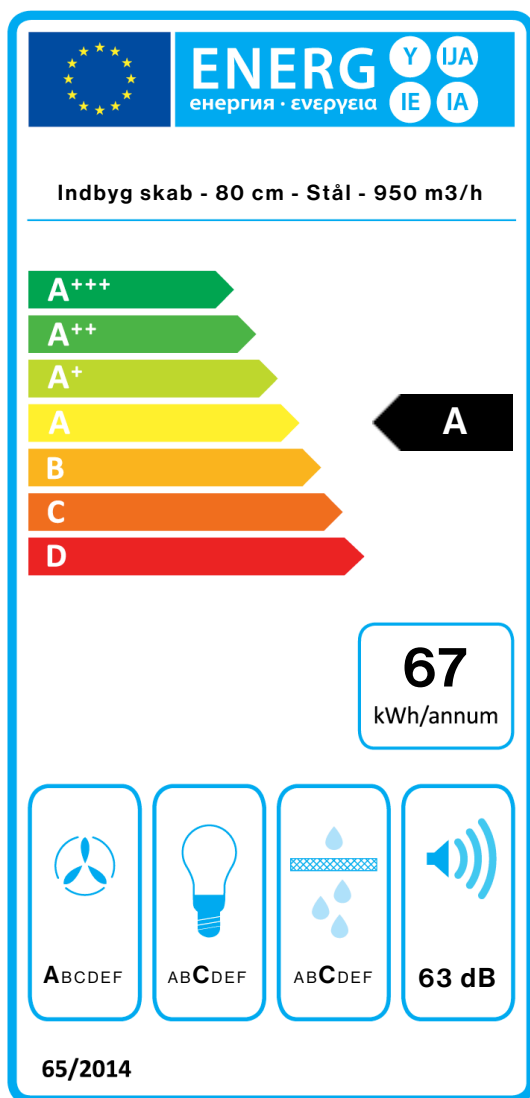

PF		
S	Falmec Spa	
M	Indbyg skab - 80 cm - Stål - 950 m ³ /h	
AEC	67,3	kWh/a
EEC	A	
FDE	29,3	
FDEC	A	
LE	18,0	
LEC	C	
GFE	74,0	
GFEC	C	
Qmin	350,0	m ³ /h
Qmax	620,0	m ³ /h
Qboost	860,0	m ³ /h
SPEmin	53	dBa
SPEmax	63	dBa
SPEboost	70	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEI	53,8	
Qbep	473,0	m ³ /h
Pbep	435	Pa
Qboost	860,0	m ³ /h
Wbep	195,0	W
WL	4,50	W
Emiddle	81	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.