

## PLANE PLUS

Plus - Wall 90 cm - White - 800  
m<sup>3</sup>/h

Design

8034122367118



*The photograph is purely for information  
It may not correspond to the selected version.*

### FEATURES

**Perimeter suction**  
**Electronic control**  
**Metallic grease filter, removable and washable**  
**Remote control (optional)**  
**Dimmable led lighting**  
**Dynamic LED Light**  
**Dialogue system**  
**Carbon.Zeo Microtech filter (optional)**

Availability Carbon.Zeo filter  
KACL.1039 for hoods produced  
from Sept. 2024

### OPTIONAL ACCESSORIES

**105080053**  
Remote control  
**KACL.1032#BF**  
Extension H700 Wall - White  
**KACL.1033#BF**  
Extension H960 Wall - White  
**KACL.1039**  
Carbon.Zeo Microtech filter  
**KACL.865**  
Air flow conveyor for re-  
circulation version (Wall)

### TECHNICAL FEATURES

**Installation type**  
Siena  
**Dimensions**  
90 cm  
**Finishing**  
Painted white steel  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Electronic control  
**Speed settings**  
3 + boost  
**Lighting**  
Strip Led - 2700 K / 5600 K

: 60 cm  
: 52 cm

### PACKAGING: WEIGHTS AND VOLUMES


28.4 kg  
23 kg  
0.28 m<sup>3</sup>  
995 mm  
480 mm  
595 mm

### CONSUMPTION AND CONNECTION FEATURES

280 W  
220-240V  
50-60Hz

### MOTOR TECHNICAL SHEET

641 m<sup>3</sup>/h  
I.E.C. 61591  
69 dB(A)re1pW  
I.E.C.60704-2-13  
500 Pa  
245 W  
A



## PLANE PLUS


Plus - Wall 90 cm - White - 800  
m<sup>3</sup>/h

Design

8034122367118

### MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
<b>dB(A)<sub>re1pW-I.E.C.60704-2-13</sub></b>	<b>51</b>	<b>61</b>	<b>66</b>	<b>69</b>
<b>(m<sup>3</sup>/h) I.E.C.61591</b>	<b>313</b>	<b>468</b>	<b>573</b>	<b>641</b>
	<b>390</b>	<b>420</b>	<b>480</b>	<b>500</b>
	<b>145</b>	<b>175</b>	<b>215</b>	<b>245</b>
	<b>150</b>	<b>150</b>	<b>150</b>	<b>150</b>

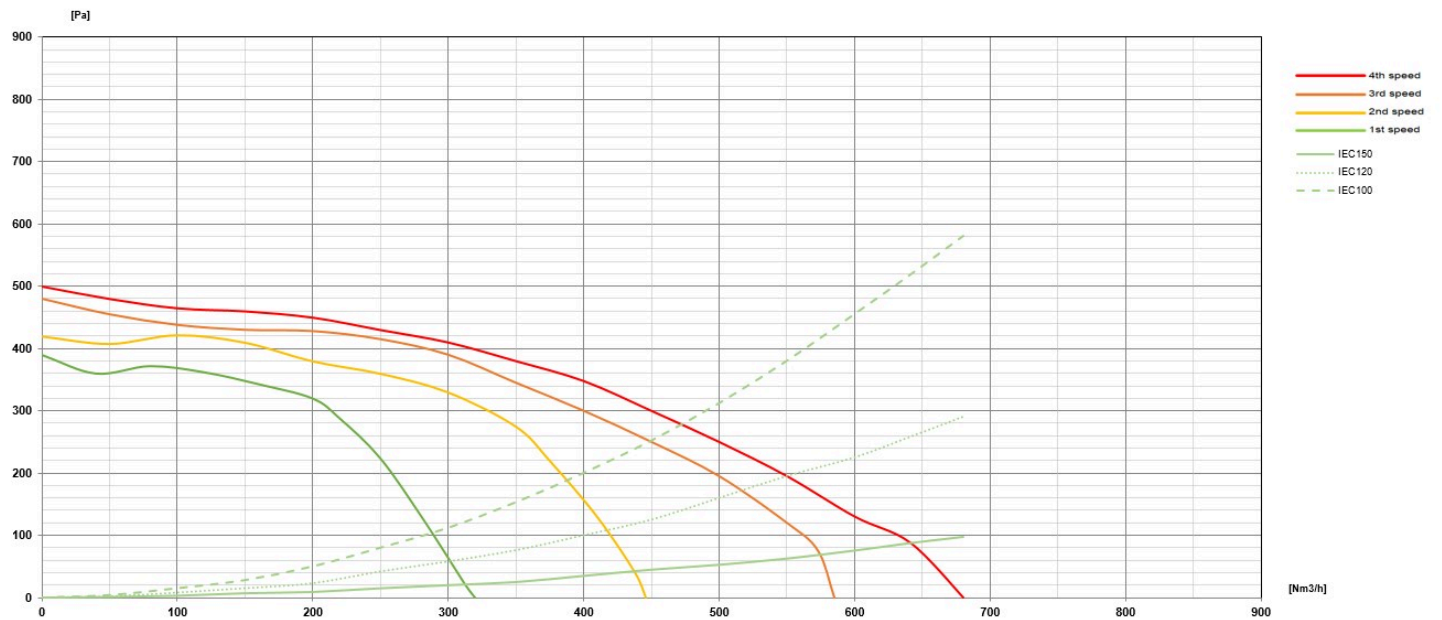


## PLANE PLUS

Plus - Wall 90 cm - White - 800 m3/h

Design

8034122367118

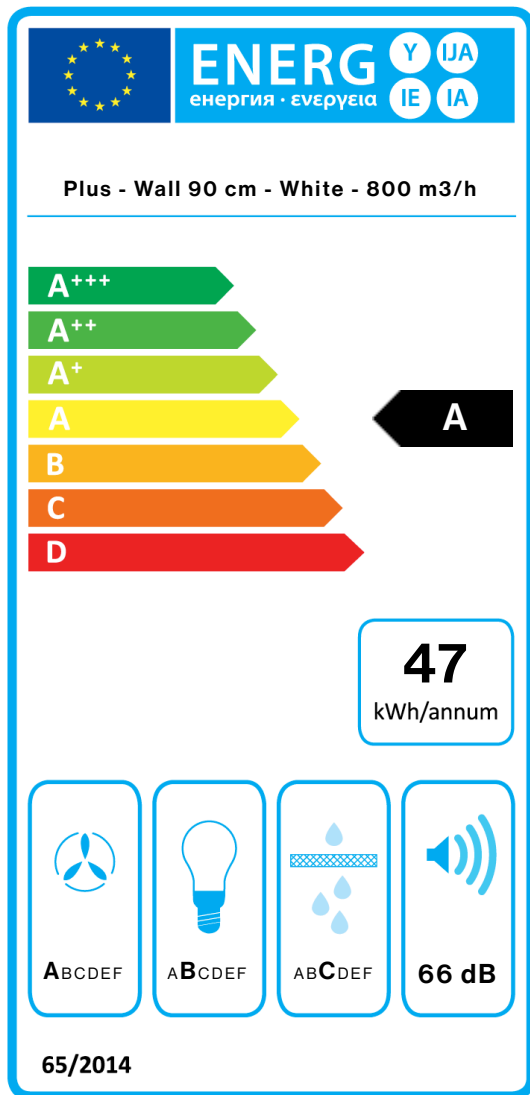

PF		
S	Falmec Spa	
M	Plus - Wall 90 cm - White - 800 m3/h	
AEC	46,9	kWh/a
EEC	A	
FDE	29,2	
FDEC	A	
LE	22,0	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	313,0	m <sup>3</sup> /h
Qmax	573,0	m <sup>3</sup> /h
Qboost	641,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEL	52,1	
Qbep	366,0	m <sup>3</sup> /h
Pbep	373	Pa
Qboost	641,0	m <sup>3</sup> /h
Wbep	130,0	W
WL	5,80	W
Emiddle	128	lux
Lwa-SPEmax	66	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.