

## PLANE PLUS NRS

### Version

Plus - Wall - 90 cm - Inox - 800 m<sup>3</sup>/h

### Designer

### Collection

Silence - NRS

### EAN code

8034122367361

## FEATURES

**NRS technology for a quieter kitchen**  
**Perimeter suction**  
**Electronic control**  
**Metallic grease filter, removable and washable**  
**Remote control (optional)**  
**Dimmable lighting**  
**Dynamic Light (2700K - 5600K)**  
**Dialogue system with auto mode**  
**Carbon.Zeo Microtech filter (optional)**

Availability Carbon.Zeo filter  
 KACL.1039 for hoods produced from Sept. 2024

## OPTIONAL ACCESSORIES

### 105080053

Remote control

### KACL.1039

Carbon.Zeo Microtech filter

### KACL.400

Silent / Conveyer NRS

### KACL.570#I

Extension H700 Wall - Inox

### KACL.571#I

Extension H960 Wall - Inox

## TECHNICAL FEATURES

**Installation type**  
 Wall  
**Dimensions**  
 90 cm  
**Finishing**  
 Scotch brite stainless steel (AISI 304)  
**Motor**  
 800 m<sup>3</sup>/h  
**Type of control**  
 Electronic control  
**Speed**  
 3 + boost  
**Lighting**  
 Strip Led - 2700 K / 5600 K  
**Minimum distance**  
 Gas hob: 60 cm  
 Electric hob: 52 cm




Photograph is for information purposes only  
 It may not correspond to the selected version.

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
 40 kg  
**Net weight**  
 34 kg  
**Volumes**  
 0.39 m<sup>3</sup>  
**Packaging size**  
 Length  
 995 mm  
 Height  
 660 mm  
 Depth  
 595 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
 280 W  
**Voltage**  
 220-240V  
**Frequency**  
 50-60Hz  
**ENERGY CLASS**  
 A



## PLANE PLUS NRS

### Version

Plus - Wall - 90 cm - Inox - 800 m3/h

### Designer


### Collection

Silence - NRS

### EAN code

8034122367361

## ENERGY LABEL

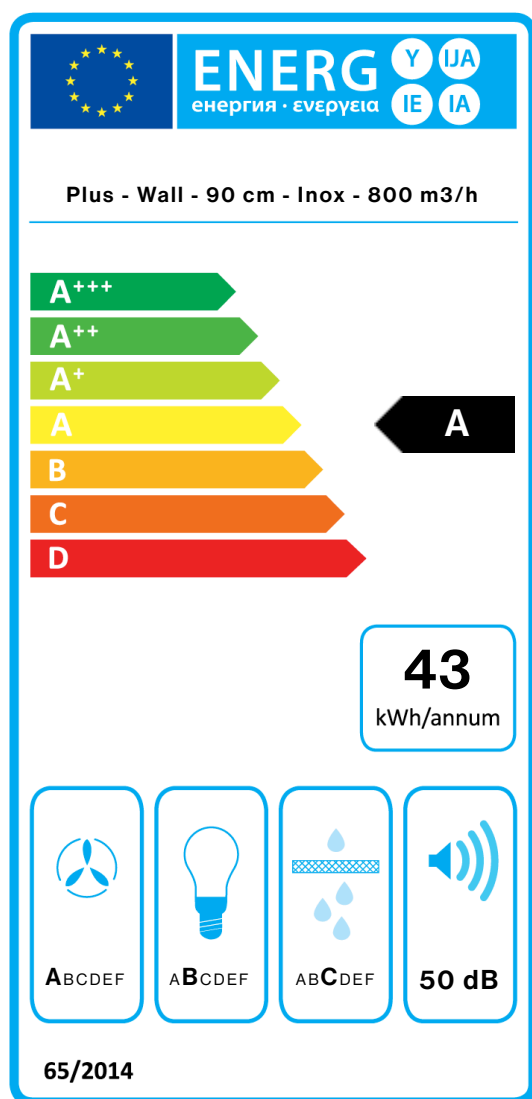

PF		
S	Falmec Spa	
M	Plus - Wall - 90 cm - Inox - 800 m3/h	
AEC	43,3	kWh/a
EEC	A	
FDE	29,7	
FDEC	A	
LE	22,0	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	270,0	m <sup>3</sup> /h
Qmax	501,0	m <sup>3</sup> /h
Qboost	611,0	m <sup>3</sup> /h
SPEmin	38	dBa
SPEmax	50	dBa
SPEboost	57	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEl	51,6	
Qbep	351,0	m <sup>3</sup> /h
Pbep	363	Pa
Qboost	611,0	m <sup>3</sup> /h
Wbep	119,0	W
WL	5,80	W
Emiddle	128	lux
Lwa-SPEmax	50	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point /

Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.