

PLANE PLUS NRS

Plus NRS - Wall 90 cm - Inox -
800 m³/h

Silence - NRS

8034122367361



The photograph is purely for information
It may not correspond to the selected version.

OMINAISUUDET

NRS teknologia äänettömään keittiöön
Reunaimu
Elektroniset kytkimet
Metalliset rasvasuodattimet, irroitettavat ja pestävät
Kaukosäädin lisävarusteena
Himmennettävä LED valaistus
Säädettävä LED valosävy (2700 - 5600 K)
Dialogijärjestelmän automaattinen tila
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPTIONAL ACCESSORIES

105080053

Kaukosäädin lisävaruste

KACL.1039

Carbon.Zeo Microtech filter

KACL.400

Äänenvaimennin/Ilmanohjain

KACL.570#I

Extension H700 Wall - Inox

KACL.571#I

Extension H960 Wall - Inox

TECHNICAL FEATURES

Installation type
Seinä
Dimensions
90 cm
Viimeistelystä
Kiillotettu ruostumaton teräs
(AISI 304)
Motor
800 m³/h
Type of control
Elektroniset kytkimet
Speed settings
3 + boost
Lighting
Strip Led - 2700 K / 5600 K

: 60 cm

: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

40 kg

34 kg

0.39 m³

995 mm

660 mm

595 mm


CONSUMPTION AND CONNECTION FEATURES

280 W

220-240V

50-60Hz

A




PLANE PLUS NRS

Plus NRS - Wall 90 cm - Inox -
800 m3/h

Silence - NRS

8034122367361

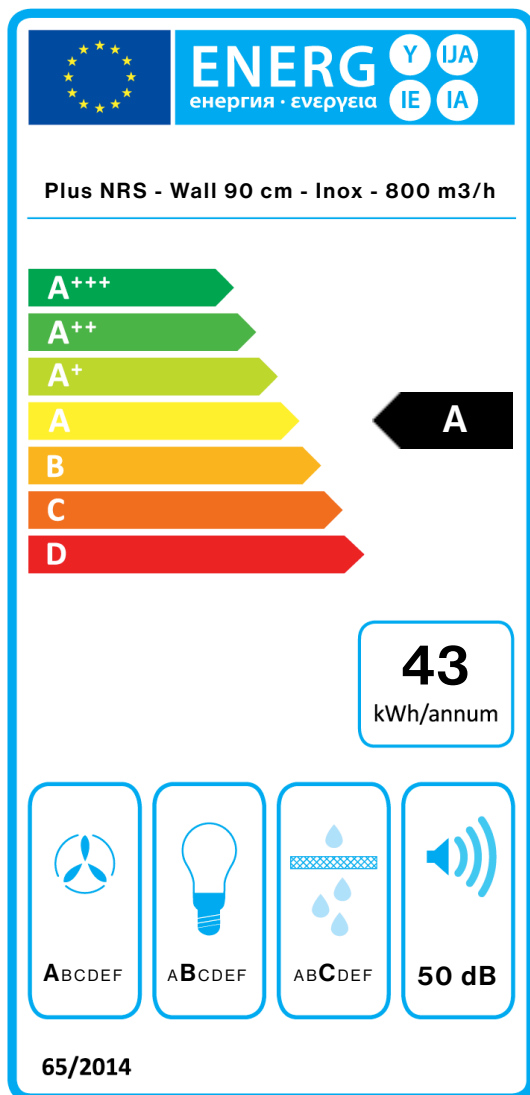

PF		
S	Falmec Spa	
M	Plus NRS - Wall 90 cm - Inox - 800 m3/h	
AEC	43,3	kWh/a
EEC	A	
FDE	29,7	
FDEC	A	
LE	22,0	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	270,0	m ³ /h
Qmax	501,0	m ³ /h
Qboost	611,0	m ³ /h
SPEmin	38	dBa
SPEmax	50	dBa
SPEboost	57	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEL	51,6	
Qbep	351,0	m ³ /h
Pbep	363	Pa
Qboost	611,0	m ³ /h
Wbep	119,0	W
WL	5,80	W
Emiddle	128	lux
Lwa-SPEmax	50	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.