

## VIRGOLA TOUCH

### Version

Touch - Built-in 60 cm - Inox - 800 m<sup>3</sup>/h

### Mbledhja

Design

### Kodi EAN

8034122367439

### KARAKTERISTIKAT GJENERIKE

**Vello qelqi e kalitur e rrotullueshme**  
**Kontrolli me prekje**  
**Filtër metalik i çmontueshëm dhe që mund të lahet**  
**Raft xhami (opsional)**  
**Ndriçim LED i zbehtë**  
**Dynamic LED Light (2700K - 5600K)**  
**Carbon.Zeo Microtech filter (optional)**

Dynamic and dimmable Led from 06.21.24

Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024

### NË DISPOZICION AKSESORË OPSIONALË

#### KACL.1039

Carbon.Zeo Microtech filter

#### KACL.106



Vetratë xhami 60 cm (opsionale)

#### KCVJN.00#3

Oxhak Telescopik L 185 + L 185 (opsionale) - Virgola/Move

#### KCVJN.01#3

Oxhak L 120 (opsionale) - Virgola/Move



Imazh tregues i produktit  
Mund të mos përputhet me versionin e zgjedhur

### KARAKTERISTIKAT TEKNIKE

#### Instalimi

Inkaso

#### Përmasat e produktit

60 cm

#### Ngjyra

Inoks Scotch Brite

#### Motor

800 m<sup>3</sup>/h

#### Paneli i kontrollit

Kontrolli me prekje

#### Shpejtësia e funksionimit

3 + boost

#### Ndriçim

Strip Led 3,5 W - 2700 K / 5600 K

#### Distanca minimale

Pianurë me gaz: 52 cm

Pianurë elektrike: 52 cm

### PAKETIM: PESHAT DHE VËLLIMET

#### Peshë bruto

13.3 kg

#### Pesha neto

10.4 kg

#### Vëllimi

0.13 m<sup>3</sup>

#### Paketim

Gjatësia

705 mm

Lartësia

410 mm

Thellesi

465 mm

### Funksionet e lidhjes dhe konsumit

#### Konsumi maksimal

280 W

#### Tensioni


220-240V

#### Frekuenca

50-60Hz

#### Klasit të energjisë

A



## VIRGOLA TOUCH

### Version

Touch - Built-in 60 cm - Inox -  
800 m<sup>3</sup>/h


### Mbledhja

Design

### Kodi EAN

8034122367439

## Etiketen e energjise

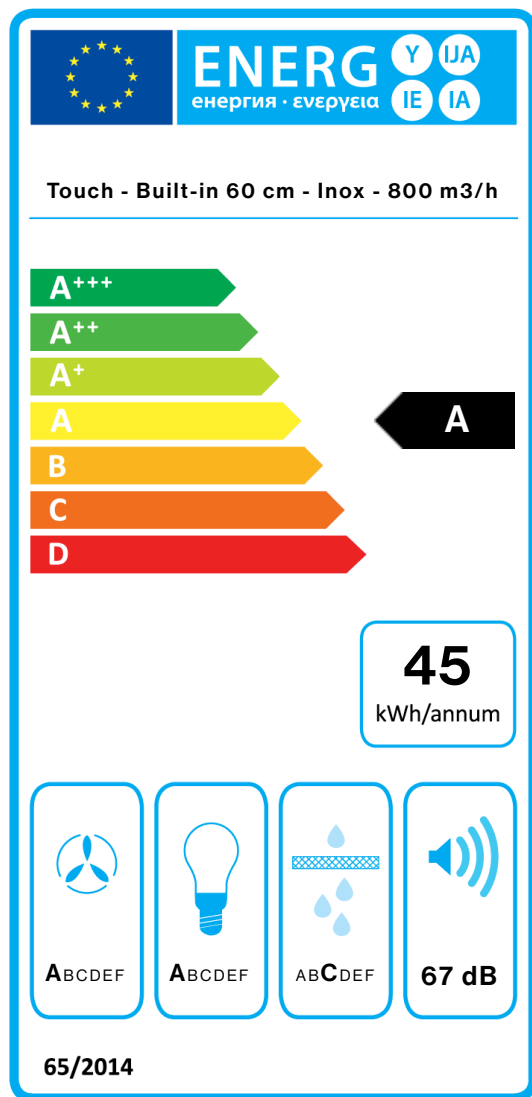

PF		
S	Falmec Spa	
M	Touch - Built-in 60 cm - Inox - 800 m <sup>3</sup> /h	
AEC	45,3	kWh/a
EEC	A	
FDE	29,8	
FDEC	A	
LE	44,0	
LEC	A	
GFE	84,0	
GFEC	C	
Qmin	300,0	m <sup>3</sup> /h
Qmax	570,0	m <sup>3</sup> /h
Qboost	661,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	67	dBa
SPEboost	71	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEl	51,1	
Qbep	389,0	m <sup>3</sup> /h
Pbep	359	Pa
Qboost	661,0	m <sup>3</sup> /h
Wbep	130,0	W
WL	3,50	W
Emiddle	154	lux
Lwa-SPEmax	67	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.