

GRUPPO INCASSO PLUS GREEN TECH

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer

Collection

Design

EAN code

8034122367286

FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable
and washable
Charcoal filter (optional)
Remote control (optional)
Dimmable lighting
Dynamic Light (2700K - 5600K)
Green Tech Motor
Dialogue system with auto mode

OPTIONAL ACCESSORIES

103050093

Charcoal Filter Ø192mm

105080053

Remote control

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
50 cm
Finishing
Scotch brite stainless steel (AISI
304)
Motor
800 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Led 2x1,7 W - 2700 K / 5600 K
Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm



Photograph is for information purposes only
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND VOLUMES


Gross weight
9.5 kg
Net weight
7.6 kg
Volumes
0.09 m³
Packaging size
Length
610 mm
Height
380 mm
Depth
375 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
620 m³/h
I.E.C. 61591
Maximum noise level
66 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
430 Pa
Max. motor power
130 W
ENERGY CLASS
A+



GRUPPO INCASSO PLUS GREEN TECH

Version

Plus - Built-in - 50 cm - Inox -
800 m3/h

Designer

Collection

Design

EAN code

8034122367286

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	47		61	66
Capacity (m3/h) I.E.C.61591	205		500	620
Maximum pressure (Pa)	170		330	430
Power (W)				130
Air outlet	150	150	150	150

GRUPPO INCASSO PLUS GREEN TECH

Version

Plus - Built-in - 50 cm - Inox -
800 m³/h

Designer


Collection

Design

EAN code

8034122367286

ENERGY LABEL

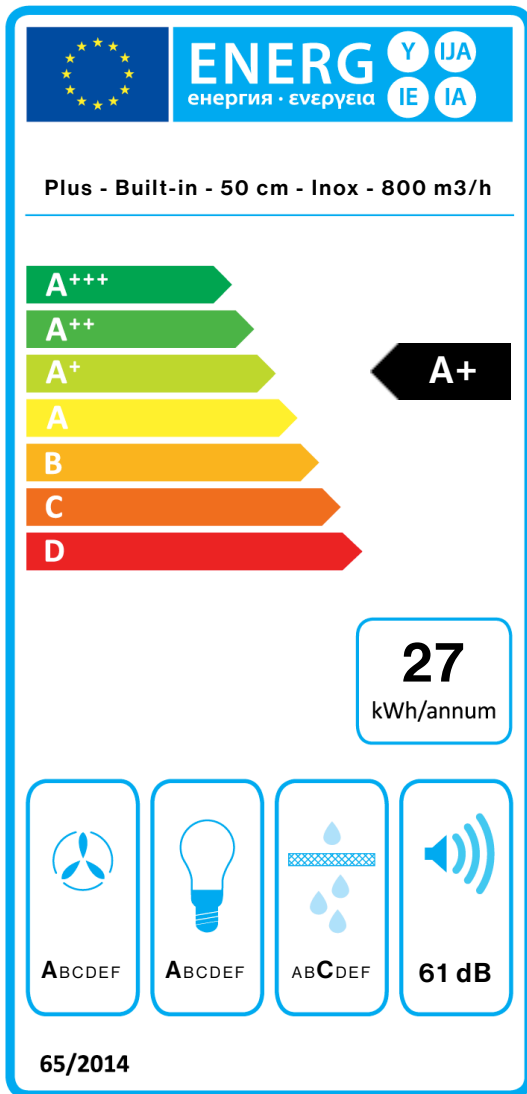

PF		
S	Falmec Spa	
M	Plus - Built-in - 50 cm - Inox - 800 m ³ /h	
AEC	26,6	kWh/a
EEC	A+	
FDE	36,5	
FDEC	A	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	205,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	620,0	m ³ /h
SPEmin	47	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,28	W
PI		
F	0.7	
EEl	38,6	
Qbep	353,0	m ³ /h
Pbep	350	Pa
Qboost	620,0	m ³ /h
Wbep	94,0	W
WL	3,50	W
Emiddle	115	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.