

BRERA 75

Version

Worktop - 75 cm - Black - 800 m³/h

Collection

Cooking systems

EAN code

8034122901039



*Photograph is for information purposes only
It may not correspond to the selected version.*

FEATURES

Residual heat indicators
Recall function
Keep warm function (44°)
"Touch slider" control
9 cooking levels + boost
Automatic pot detection
Automatic cut-off timer (for each cooking zone)
Timer / minute minder
Safety switch-off / safety lock function
Pause function
Chef function
Brushless Motor
Automode (suction speed automatically adjusts to cooking power)
4 cooking areas with Flex Surface technology
Motorized flap system
Bridge function
Emptied liquid collector
Power level management from 2.8kW to 7.4kW
Carbon.Zeo Microtech filter (optional)

TECHNICAL FEATURES

Installation type
Worktop
Dimensions
75 cm
Finishing
Schott black ceramic glass
Motor
800 m³/h
Type of control
Touch control
Speed
9 + boost

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
35.5 kg
Net weight
30.3 kg
Volumes
0.29 m³
Packaging size
Length
980 mm
Height
480 mm
Depth
615 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
A+++

OPTIONAL ACCESSORIES

KACL.1026

Silence Kit

KACL.1037

Filter Carbon.Zeo Microtech renewable

BRERA 75

Version










Worktop - 75 cm - Black - 800
m³/h

Collection

Cooking systems

EAN code

8034122901039



BRERA 75

Version

Worktop - 75 cm - Black - 800 m3/h


Collection

Cooking systems

EAN code

8034122901039

ENERGY LABEL

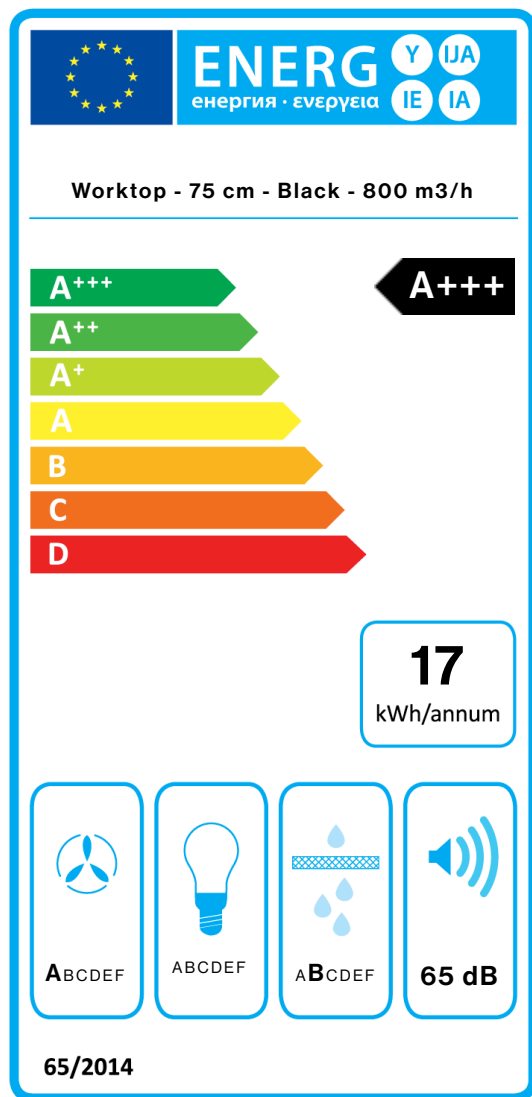

PF		
S	Falmec Spa	
M	Worktop - 75 cm - Black - 800 m3/h	
AEC	16,5	kWh/a
EEC	A+++	
FDE	43,4	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	254,0	m³/h
Qmax	640,0	m³/h
Qboost	690,0	m³/h
SPEmin	44	dBa
SPEmax	65	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.4	
EEl	21,3	
Qbep	384,0	m³/h
Pbep	460	Pa
Qboost	690,0	m³/h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.