

NUVOLA 140

Version

Ceiling 140 cm - White

Collection

Design+

EAN code

8034122353111

KACL.798#41F

Remote under-roof motor 950 m³/h

Collection

Accessoires

EAN code

8034122709833



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Painted white steel
Tempered extra light painted
Perimeter suction
Neon lighting
Metallic grease filter, removable and washable
Remote control included

Cut-out size: 590 x 1325 mm

OPTIONAL ACCESSORIES

KACL.782#49F

Slim motor 800 m³/h

KACL.798#41F

Remote under-roof motor 950 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h
Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

KACL.939#BF

Ceiling re-circulation filtering kit
(only for Slim Motor)

TECHNICAL FEATURES

Installation type

Ceiling

Dimensions

140 cm

Finishing

Painted white steel

Type of control

Electronic control

Speed settings

4

Lighting

Neon

Filter

Metallic filter "Base" - 290x267 mm - 2 pz

PACKAGING:WEIGHTS AND VOLUMES

NUVOLA 140

Ceiling 140 cm - White

Gross weight

41.00 kg

Net weight

36.00 kg

Volume

0.22 m³

Packaging size

Length

1455 mm

Height

730 mm

Depth

210 mm

REMOTE MOTOR

Remote under-roof motor 950 m³/h

Gross weight

10.00 kg

Net weight

9.00 kg

Volumes

0.06 m³

Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

391 W

Voltage / Frequency

220-240V

50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity

830 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

580 Pa

Max. motor power

270 W

ENERGY CLASS

C

NUVOLA 140

Version

Ceiling 140 cm - White

Collection

Design+

EAN code

8034122353111

KACL.798#41F

Remote under-roof motor 950

m³/h

Collection

Accessoires


EAN code

8034122709833

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	50	57	64	68
Capacity (m3/h) I.E.C.61591 Normalized Pipes	360	480	630	830
Maximum pressure (Pa)	480	520	560	580
Motor Power (W)	190	220	250	270
Air outlet	150	150	150	150

CAPACITY / PRESSURE

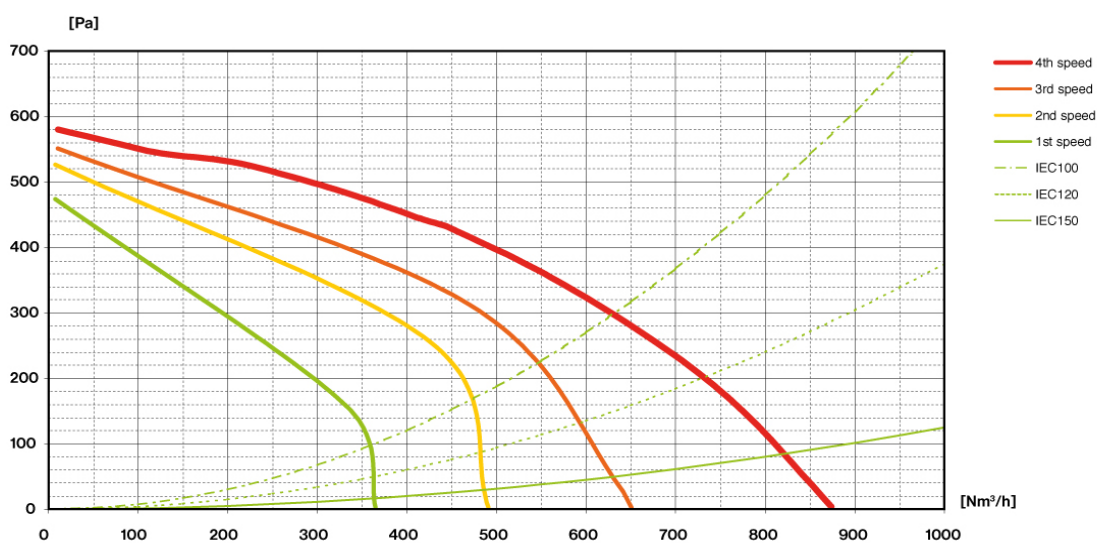

NUVOLA 140

Version

Ceiling 140 cm - White

Collection

Design+

EAN code

8034122353111

KACL.798#41F

Remote under-roof motor 950

m³/h


Collection

Accessoires

EAN code

8034122709833

ENERGY LABEL

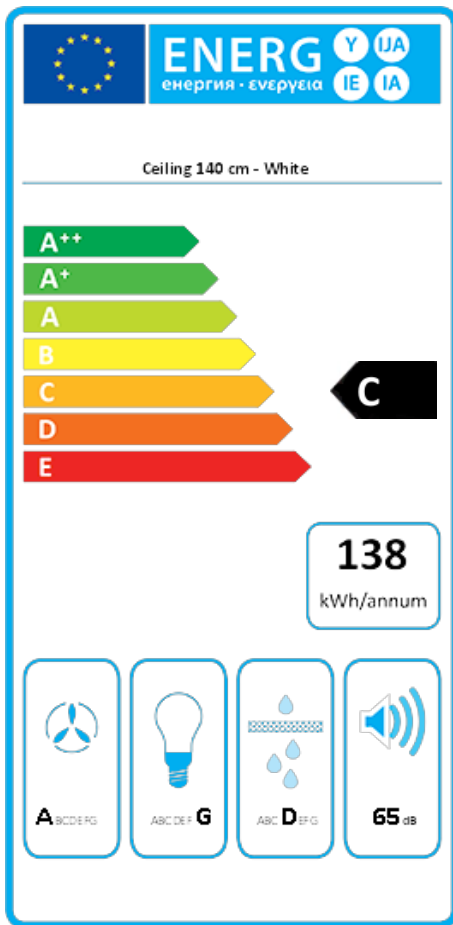

PF		
S	Falmec Spa	
M	Ceiling 140 cm - White	
AEC	138,0	kWh/a
ECC	C	
FDE	29,5	
FDEC	A	
LE	2,5	
LEC	G	
GFE	51,0	
GFEC	D	
Qmin	360,0	m ³ /h
Qmax	630,0	m ³ /h
Qboost	880,0	m ³ /h
SPEmin	51	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,68	W
PI		
F	0,9	
EEl	79,4	
Qbep	441,0	m ³ /h
Pbep	434	Pa
Qboost	880,0	m ³ /h
Wbep	180,0	W
WL	108,00	W
Emiddle	272	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.