

## VERSO

Seinä 55 cm, harmaa 800 m<sup>3</sup>/h

Design

8034122368610



*The photograph is purely for information  
It may not correspond to the selected version.*

### OMINAISUUDET

**Karkaistu lasi**  
**Hipaisukytkimet + 24 H toiminto**  
**Metalliset rasvasuodattimet, irroitettavat ja pestävät**  
**Lisävarusteena uudelleen aktivoitava Carbon.Zeo suodatin**  
**Aktiivihiilisuodatin lisävarusteena**  
**Kaukosäädin lisävarusteena**  
**Mahdollista asentaa seinän läpi**  
**Himmennettävä LED valaistus**  
**Säädettävä LED valosävy (2700 - 5600 K)**  
**Dialogijärjestelmän automaattinen tila**

### TECHNICAL FEATURES

**Installation type**  
Seinä  
**Dimensions**  
55 cm  
**Viimeistelystä**  
Harmaa karkaistu lasi  
**Motor**  
800 m<sup>3</sup>/h  
**Type of control**  
Hipaisukytkimet  
**Speed settings**  
3 + boost  
**Lighting**  
Led 2x1,2 W - 2700 K / 5600 K  
  
: 52 cm  
: 52 cm

### PACKAGING: WEIGHTS AND VOLUMES

20.3 kg  
16.2 kg  
0.19 m<sup>3</sup>  
  
710 mm  
450 mm  
595 mm

### CONSUMPTION AND CONNECTION FEATURES

280 W  
220-240V  
50-60Hz  
A

From 02.09.2024 the Dialogue System control and dimmable light are included while the carbon filter 103050091 is optional.

### OPTIONAL ACCESSORIES

#### 103050091

Pyöreä aktiiviilisuodatin Ø170mm  
- Type 6

#### 105080053





Kaukosäädin lisävaruste

#### KACL.865

Seinä

#### KCQAN.00#I

Hormiputkensuoja (RST)




## VERSO

Seinä 55 cm, harmaa 800 m3/h

Design

8034122368610

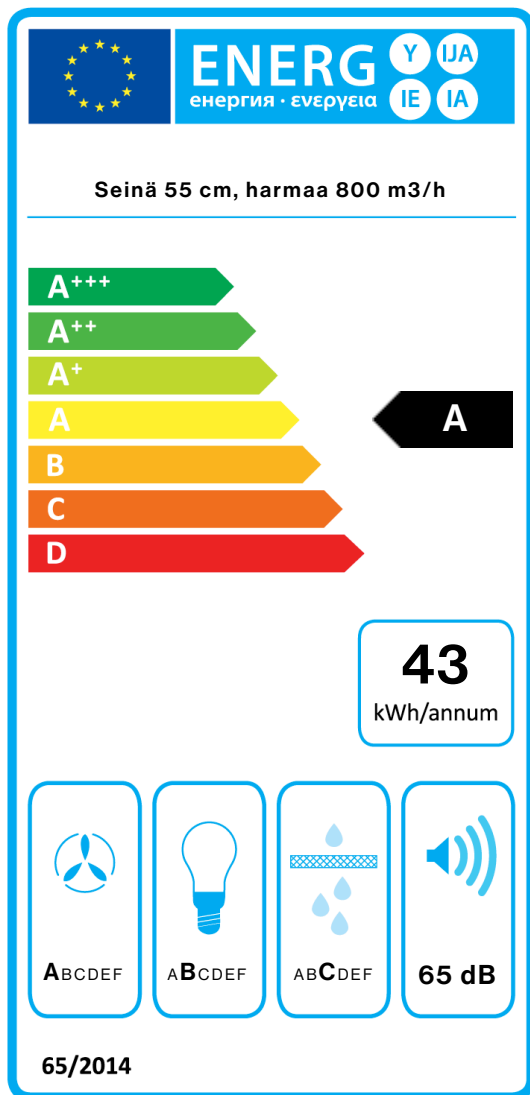

PF		
S	Falmec Spa	
M	Seinä 55 cm, harmaa 800 m3/h	
AEC	43,0	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	299,0	m <sup>3</sup> /h
Qmax	584,0	m <sup>3</sup> /h
Qboost	708,0	m <sup>3</sup> /h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEL	46,8	
Qbep	429,0	m <sup>3</sup> /h
Pbep	375	Pa
Qboost	708,0	m <sup>3</sup> /h
Wbep	134,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.