

## VERSO

### Versiyon

Grey - 55 cm - 800 m<sup>3</sup>/h

### Koleksiyon

Design

### EAN kodu

8034122368610



Fotoğraf tamamen bilgi amaçlıdır  
Seçili versiyona ait olmayabilir.

## ÖZELLİKLER

- Temperli cam
- Dokunmatik kontrol + 24 sa fonksiyonu
- Çıkarılabilir ve yıkanabilir
- Metal yağ filtresi
- Opsiyonel yenilenebilir Karbon Zeo filtre
- Opsiyonel karbon filtre
- Opsiyonel uzaktan kumanda
- Bacalı kullanım için arka bağlantı çıkışı
- Aydınlık seviyesi ayarlanabilir led aydınlatma
- Dinamik Led aydınlatma (2700K - 5600K)
- Otomatik modlu diyalog sistemi

## TEKNİK ÖZELLİKLER

- Kurulum tipi  
Duvar
- Ölçüler  
55 cm
- Finişler  
Gri temperli cam finiş
- Motor  
800 m<sup>3</sup>/h
- Kontrol tipi  
Dokunmatik kontrol
- Hız ayarı  
3 + boost
- Aydınlatma  
Led 2x1,2 W - 2700 K / 5600 K
- Minimum uzaklık  
Gazlı ocak: 52 cm  
Elektrikli ocak: 52 cm

## PAKETLEME: AĞIRLIK VE HACİM

- Brüt ağırlık  
20.3 kg
- Net ağırlık  
16.2 kg
- Hacimler  
0.19 m<sup>3</sup>
- Paketleme ölçüsü  
Uzunluk  
710 mm  
Yükseklik  
450 mm  
Derinlik  
595 mm

## TÜKETİM VE BAĞLANTI ÖZELLİKLERİ

- Maksimum tüketim  
280 W
- Akım  
220-240V
- Frekans  
50-60Hz
- ENERJİ SINIFI  
A

From 02.09.2024 the Dialogue System control and dimmable light are included while the carbon filter 103050091 is optional.

## OPSİYONEL AKSESUARLAR

### 103050091

Yuvarlak karbon filtre Ø170 mm - Tip 6

### 105080053





Uzaktan Kumanda

### KACL.865

Resirkülasyon versiyon (Duvar) için hava akım taşıyıcısı

### KCQAN.00#I

Baca (Inox)



## VERSO

### Versiyon

Grey - 55 cm - 800 m<sup>3</sup>/h


### Koleksiyon

Design

### EAN kodu

8034122368610

## ENERJİ ETİKETİ

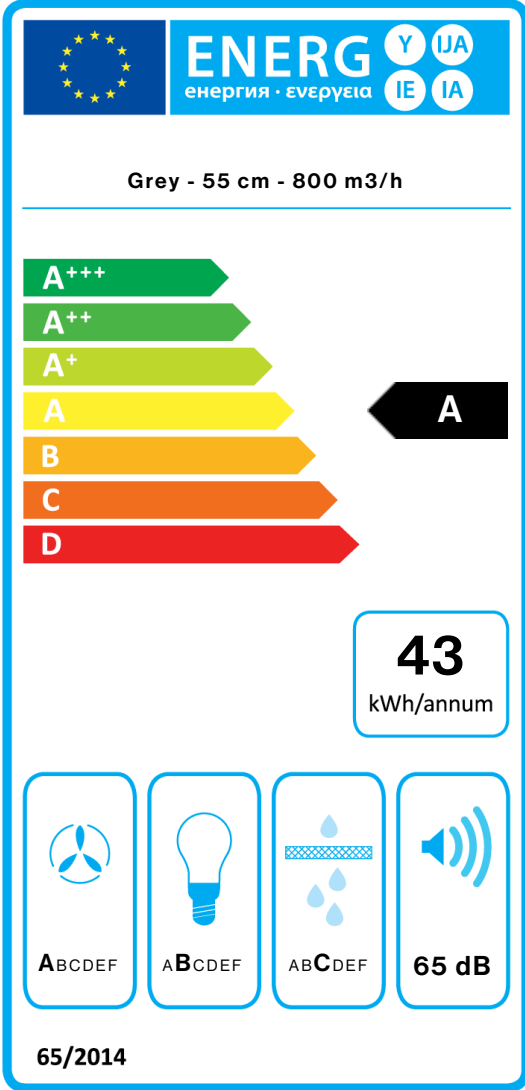

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	Grey - 55 cm - 800 m <sup>3</sup> /h	
<b>AEC</b>	43,0	kWh/a
<b>EEC</b>	A	
<b>FDE</b>	33,3	
<b>FDEC</b>	A	
<b>LE</b>	21,6	
<b>LEC</b>	B	
<b>GFE</b>	82,0	
<b>GFEC</b>	C	
<b>Qmin</b>	299,0	m <sup>3</sup> /h
<b>Qmax</b>	584,0	m <sup>3</sup> /h
<b>Qboost</b>	708,0	m <sup>3</sup> /h
<b>SPEmin</b>	50	dBa
<b>SPEmax</b>	65	dBa
<b>SPEboost</b>	69	dBa
<b>PO</b>	-	W
<b>PS</b>	0,48	W
PI		
<b>F</b>	0.8	
<b>EEl</b>	46,8	
<b>Qbep</b>	429,0	m <sup>3</sup> /h
<b>Pbep</b>	375	Pa
<b>Qboost</b>	708,0	m <sup>3</sup> /h
<b>Wbep</b>	134,0	W
<b>WL</b>	5,30	W
<b>Emiddle</b>	114	lux
<b>Lwa-SPEmax</b>	65	dBa

65/2014'e göre PF\_Ürün fişi S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). 66/2014'e göre PI\_Ek bilgi F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.