

NUVOLA 140

Slimlinemotor 800 m3

Sortiment

Design+

EAN Kode

8034122353197

FUNKTIONER

Kantsug
Elektronisk kontrolpanel
Neonlys
Vaskbare rustfrie fedtfiltere
Fjernbetjening i tillæg

MULIGHEDER FOR TILVALG

01MO-GAVL

Gavlmotor til udendørs brug
 1000 m3/h

01MO-GAVL-15

Gavlmotor til udendørs brug
 1500 m3/h

01MO-LOFT

Loftmotorer under taget 950
 m3/h

01MO-LOFT-13

Loftmotor 1300 m3 Ø200 mm

01MO-SLIM

Slimlinemotor 800 m3

07MAGIC

Beskyttende rensklude til
 rustfrit stål. Kasse med 10 klude

KACL.770#41F

Loftmotorer 1100 m3/h

Brushless

KACL.939#BF

Recirkulationskit (01RECIRK) til
 brug med Slimlinemotor. Til
 loftsemfang.

TEKNISK BESKRIVELSE

Installation

Emhætte til loft

Dimensioner

140 cm

Materiale

Scotch brite rustfrit stål (AISI
 304)

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

Neon

Filter

4 x Metallfiltere - Base - 290x267
 mm

Gaskomfur: 150 cm

Kogeplade: 150 cm



Fotografiet er udelukkende informativt

Korresponderer ikke nødvendigvis tmed den valgte model

EMBALLAGE: VÆGT OG VOLUMEN

NUVOLA 140 Bruttovægt

41 kg

Nettovægt

36 kg

Volumen

0.22 m³

Mål på emballage

Længde

1455 mm

Højde

210 mm

Dybde

730 mm

EKSTERN MOTOR

Slimlinemotor 800 m3

Bruttovægt

6.5 kg

Nettovægt

5.2 kg

Volumen

0.04 m³

Mål på emballage

Længde

575 mm

Højde

195 mm

Dybde

395 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

120 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

550 m³/h

I.E.C. 61591

Maksimalt støjniveau

66 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)


600 Pa

Maksimal sugestyrke

150 W

ENERGIKLASSE

D

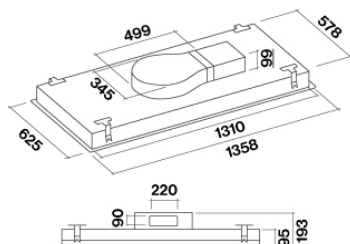

Hood and motor dimensions

NUVOLA 140

Slimlinemotor 800 m3

Sortiment

Design+


EAN Kode

8034122353197

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Kapacitet (m3/h) I.E.C.61591	285	340	470	550
Maksimalt tryk (Pa)	400	480	500	600
Forbrug (W)	100	110	120	150
Luftudtag	220x90	220x90	220x90	220x90

KAPACITET / TRYK

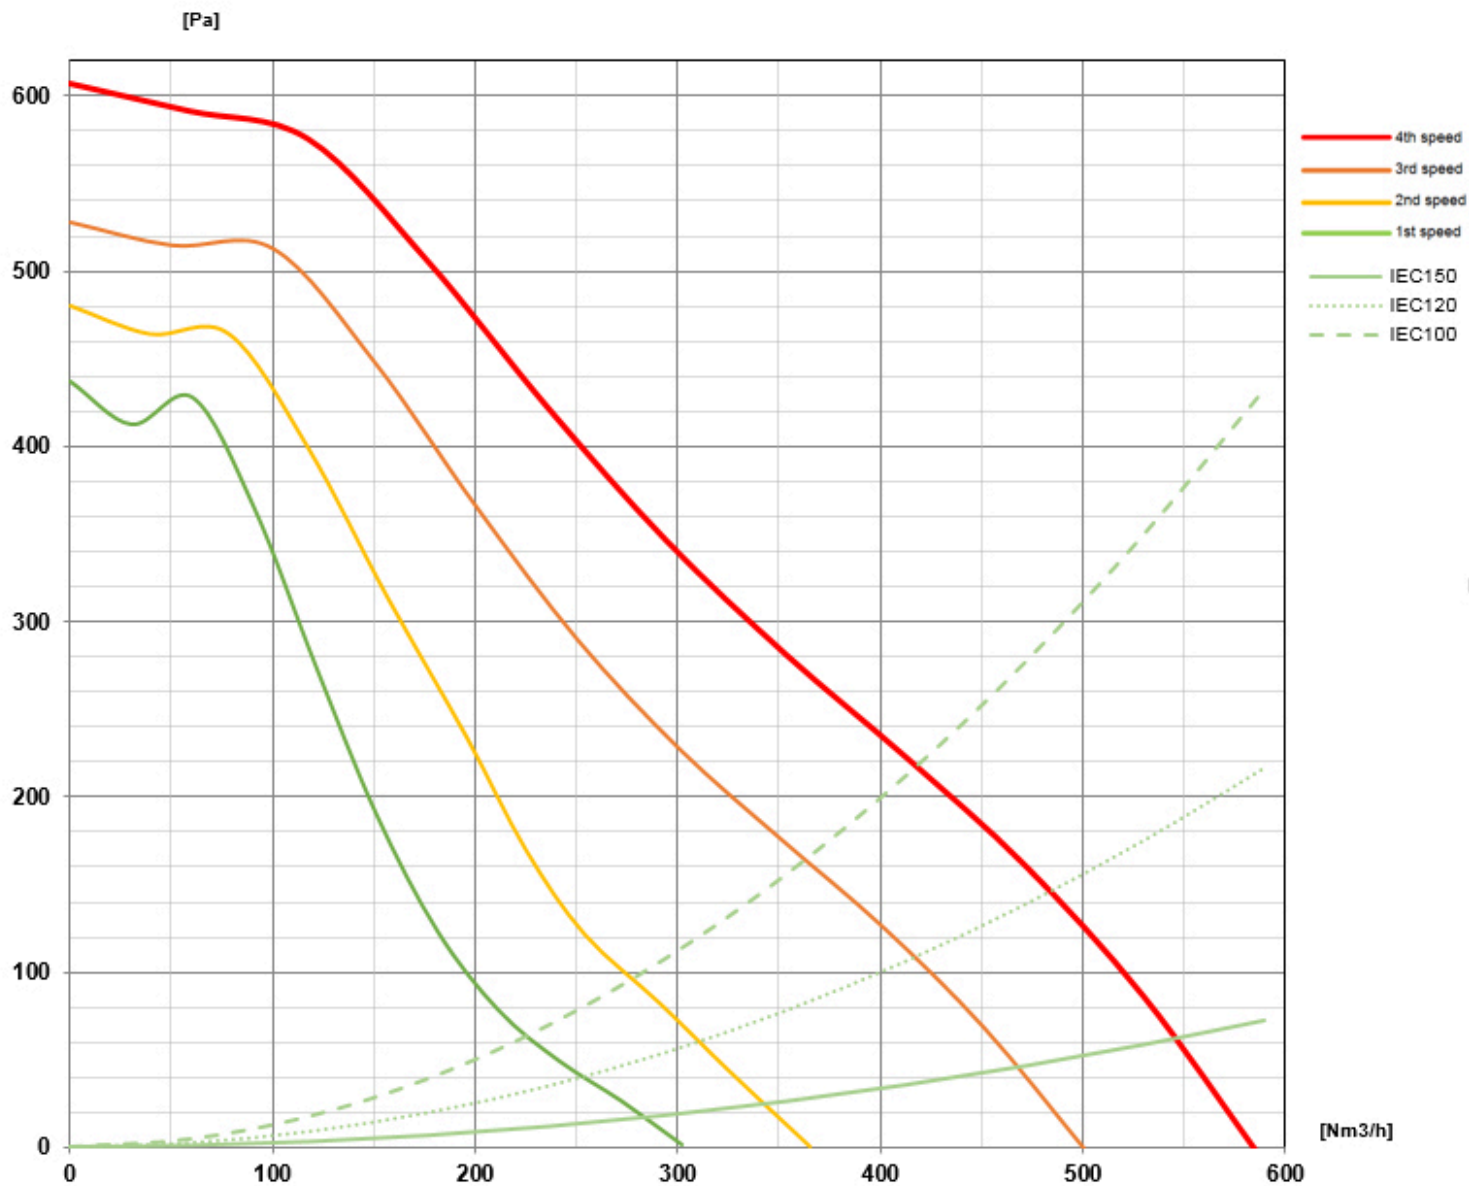

NUVOLA 140


Slimlinemotor 800 m3

Sortiment

Design+

EAN Kode

8034122353197

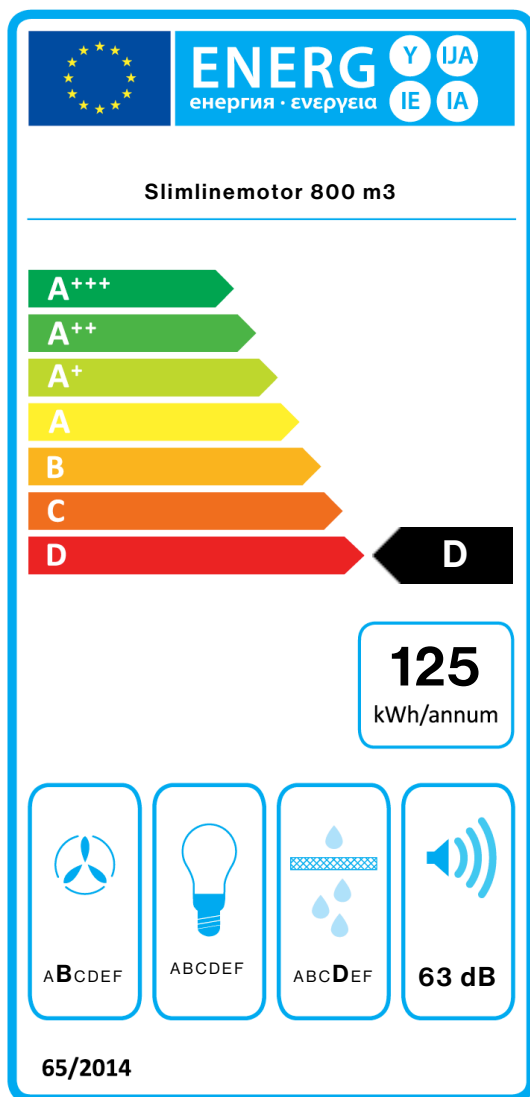

PF		
S	Falmec Spa	
M	Slimlinemotor 800 m3	
AEC	125,0	kWh/a
EEC	D	
FDE	24,3	
FDEC	B	
LE	2,5	
LEC	G	
GFE	65,1	
GFEC	D	
Qmin	285,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	550,0	m ³ /h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEL	90,6	
Qbep	337,0	m ³ /h
Pbep	298	Pa
Qboost	550,0	m ³ /h
Wbep	115,0	W
WL	108,00	W
Emiddle	272	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.