

## VERSO

### Versiune

Albă - 55 cm - 800 m<sup>3</sup>/h

### Colectie

Design

### Cod EAN

8034122368627



Fotografie cu caracter strict orientativ  
Aceasta poate sa nu corespunda versiunii selectate

## CARACTERISTICI

**Sticla tratata termic**  
**Touch control + functia 24 h**  
**Filtru de grasime metalic, detasabil si lavabil**  
**Optional - filtru combinat Carbon.Zeo, regenerabil**  
**Optional - filtru de carbon**  
**Optional - telecomanda**  
**Posibilitatea de a conecta la tubulatură prin partea din spate**  
**Optional - masca pentru tubulatura**  
**Dimmable led lighting**  
**Dynamic LED Light (2700K - 5600K)**  
**Dialogue system cu mod automat**

## CARACTERISTICI TEHNICE

**Tip de instalare**  
De perete  
**Dimensiuni**  
55 cm  
**Finisaj**  
Sticla tratata termic culoare alba  
**Motor**  
800 m<sup>3</sup>/h  
**Tipul panoului de control**  
Touch control  
**Setari de viteza**  
3 + boost  
**Iluminare**  
Led 2x1,2 W - 2700 K / 5600 K  
**Distanta minima**  
Plita cu gaz: 52 cm  
Plita electrica: 52 cm

## AMBALARE: GREUTATE SI VOLUM

**Greutate bruta**  
20.3 kg  
**Greutate neta**  
16.2 kg  
**Volum**  
0.19 m<sup>3</sup>  
**Dimensiuni ambalaj**  
Lungime  
710 mm  
Inaltime  
450 mm  
Adancime  
595 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

**Consum maxim**  
280 W  
**Curent**  
220-240V  
**Frecventa**  
50-60Hz  
**CLASA DE ENERGIE**  
A

From 02.09.2024 the Dialogue System control and dimmable light are included while the carbon filter 103050091 is optional.

## ACCESORII OPTIONALE

### 103050091

Filtru de carbon rotund Ø170 mm  
- Tip 6

### 105080053

Telecomanda

### KACL.865





Conveier de aer pentru verisunea in recirculare (Perete)

### KACL.941

External Carbon.Zeo filter unit for sloped hoods

### KCQAN.00#B

Optional Chimney (White)



## VERSO

### Versiune

Albă - 55 cm - 800 m<sup>3</sup>/h


### Colectie

Design

### Cod EAN

8034122368627

## ETICHETA DE ENERGIE

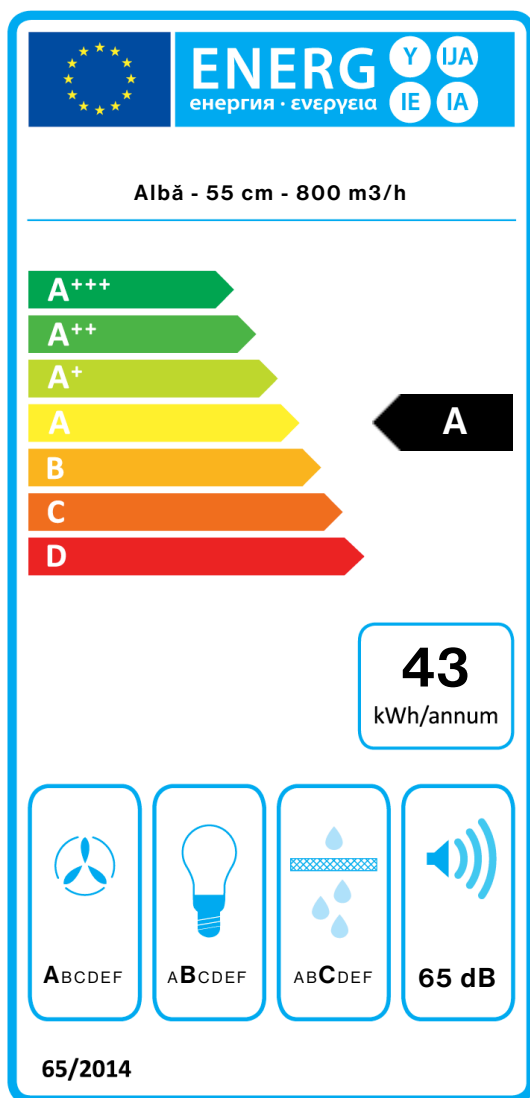

PF		
S	Falmec Spa	
M	Albă - 55 cm - 800 m <sup>3</sup> /h	
AEC	43,0	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	299,0	m <sup>3</sup> /h
Qmax	584,0	m <sup>3</sup> /h
Qboost	708,0	m <sup>3</sup> /h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEI	46,8	
Qbep	429,0	m <sup>3</sup> /h
Pbep	375	Pa
Qboost	708,0	m <sup>3</sup> /h
Wbep	134,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.