

## NUVOLA 90

Slimlinemotor 800 m3

### Sortiment

Design+

### EAN Kode

8034122353180



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

### FUNKTIONER

**Kantsug**  
**Elektronisk kontrolpanel**  
**Neonlys**  
**Vaskbare rustfrie fedtfiltere**  
**Fjernbetjening i tillæg**

### MULIGHEDER FOR TILVALG

#### 01MO-GAVL

Gavlmotor til udendørs brug  
1000 m3/h

#### 01MO-GAVL-15

Gavlmotor til udendørs brug  
1500 m3/h

#### 01MO-LOFT

Loftmotorer under taget 950  
m3/h

#### 01MO-LOFT-13

Loftmotor 1300 m3 Ø200 mm

#### 01MO-SLIM

Slimlinemotor 800 m3

#### 07MAGIC

Beskyttende rensesklude til  
rustfrit stål. Kasse med 10 klude

#### KACL.770#41F

Loftmotorer 1100 m3/h

Brushless

#### KACL.939#BF

Recirkulationskit (01RECIRK) til  
brug med Slimlinemotor. Til  
loftsemfang.

### TEKNISK BESKRIVELSE

#### Installation

Emhætte til loft

#### Dimensioner

90 cm

#### Materiale

Scotch brite rustfrit stål (AISI  
304)

#### Betjening

Elektronisk kontrolpanel

#### Hastighed

3 + boost

#### Belysning

Neon

#### Filter

3 x Metallfiltere - Base - 290x267  
mm

Gaskomfur: 150 cm

Kogeplade: 150 cm

### EMBALLAGE: VÆGT OG VOLUMEN

#### NUVOLA 90 Bruttovægt

26.2 kg

#### Nettovægt

23.4 kg

#### Volumen

0.14 m<sup>3</sup>

#### Mål på emballage

Længde

1120 mm

Højde

190 mm

Dybde

670 mm

#### EKSTERN MOTOR

Slimlinemotor 800 m3

#### Bruttovægt

6.5 kg

#### Nettovægt

5.2 kg

#### Volumen

0.04 m<sup>3</sup>

#### Mål på emballage

Længde

575 mm

Højde

195 mm

Dybde

395 mm

### FORBRUG OG TILSLUTNINGSMULIGHEDER

#### Maksimalt forbrug

120 W

#### Spænding

220-240V

#### Frekvens

50-60Hz

Shuko

#### DATABLAD MOTOR

#### Maksimal kapacitet

550 m<sup>3</sup>/h

I.E.C. 61591

#### Maksimalt støjniveau

66 dB(A)re1pW

I.E.C.60704-2-13

#### Maksimalt tryk (Pa)


600 Pa

#### Maksimal sugestyrke

150 W

#### ENERGIKLASSE

C



Hood and motor dimensions

## NUVOLA 90

Slimlinemotor 800 m3

### Sortiment

Design+


### EAN Kode

8034122353180

## DATABLAD MOTOR

| Motorhastighed                                | 1      | 2      | 3      | 4      |
|---|--------|--------|--------|--------|
| Støjniveau<br>dB(A)re1pW-<br>I.E.C.60704-2-13 | 52     | 58     | 63     | 66     |
| Kapacitet (m3/h)<br>I.E.C.61591               | 285    | 340    | 470    | 550    |
| Maksimalt tryk (Pa)                           | 400    | 480    | 500    | 600    |
| Forbrug (W)                                   | 100    | 110    | 120    | 150    |
| Luftudtag                                     | 220x90 | 220x90 | 220x90 | 220x90 |

KAPACITET / TRYK

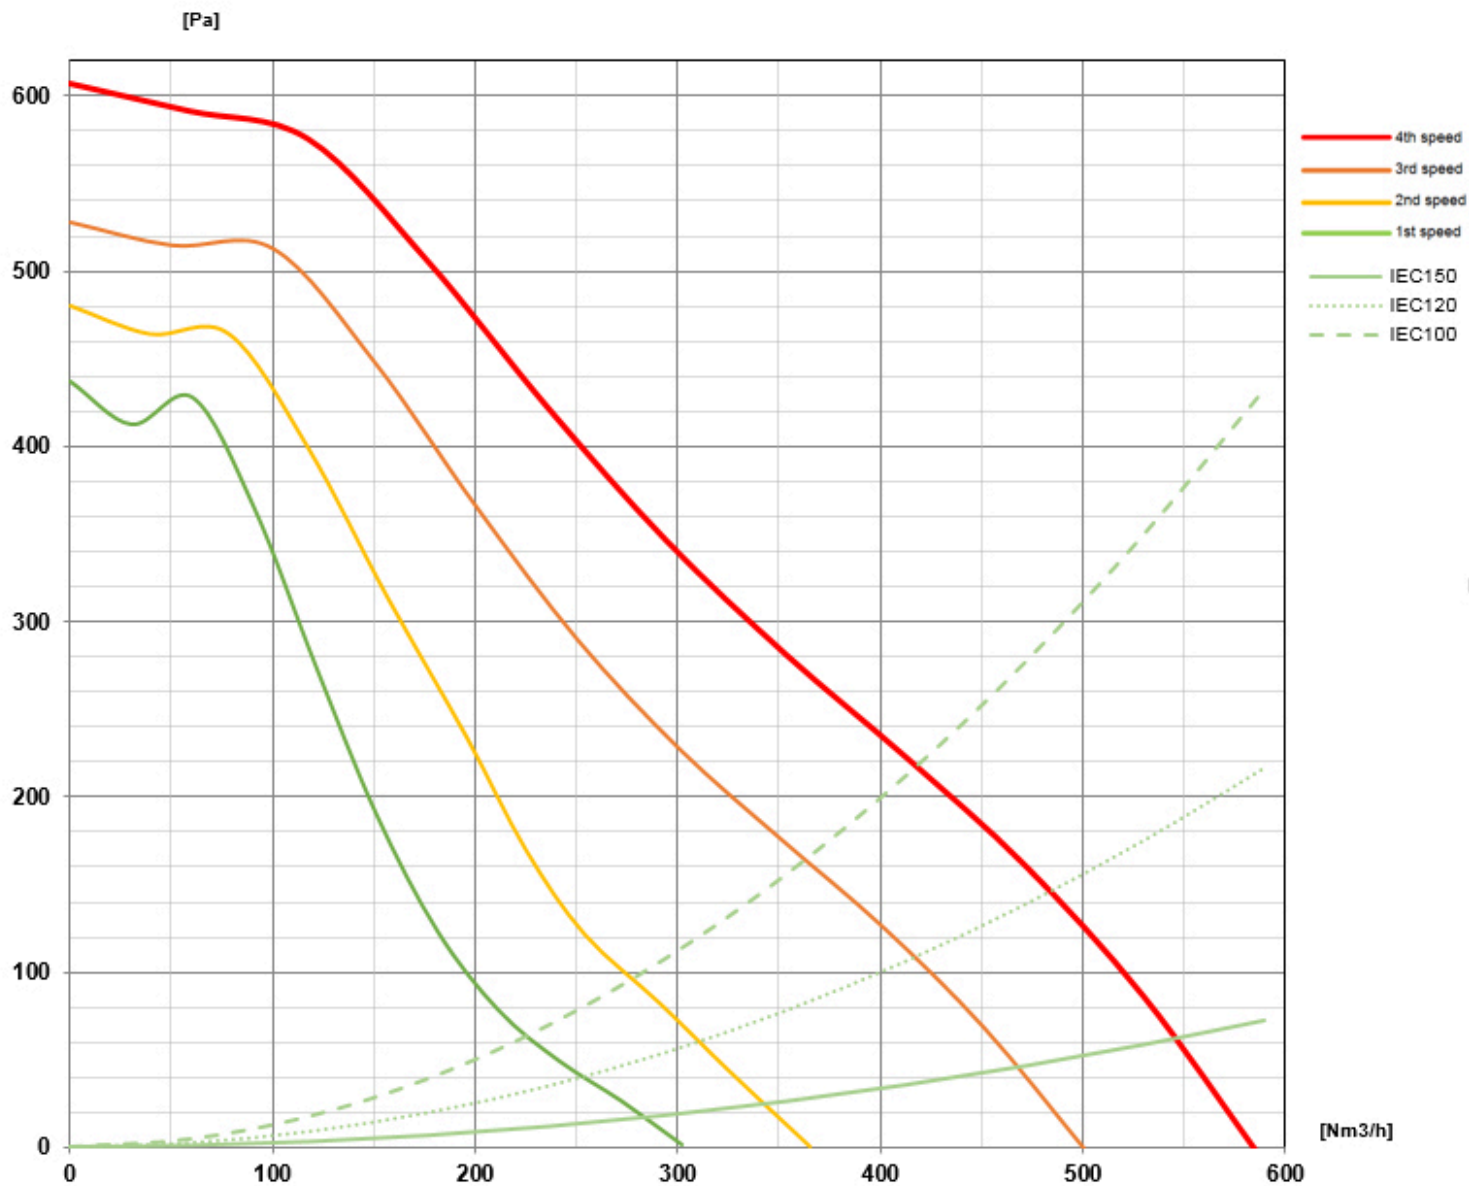

## NUVOLA 90


Slimlinemotor 800 m3

### Sortiment

Design+

### EAN Kode

8034122353180

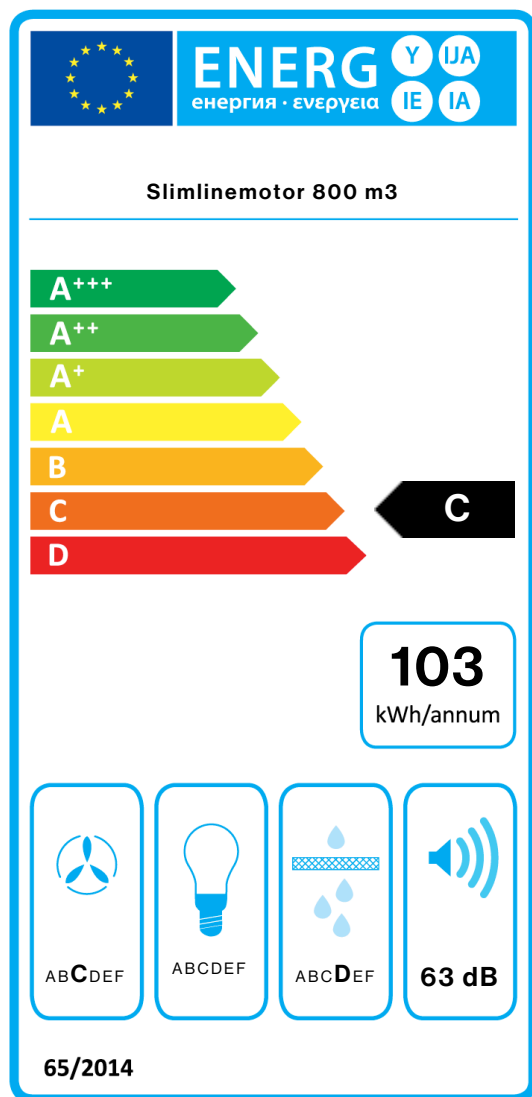

| PF         |                      |                   |
|------------|----------------------|-------------------|
| S          | Falmec Spa           |                   |
| M          | Slimlinemotor 800 m3 |                   |
| AEC        | 103,1                | kWh/a             |
| EEC        | C                    |                   |
| FDE        | 24,3                 |                   |
| FDEC       | C                    |                   |
| LE         | 1,2                  |                   |
| LEC        | G                    |                   |
| GFE        | 65,1                 |                   |
| GFEC       | D                    |                   |
| Qmin       | 285,0                | m <sup>3</sup> /h |
| Qmax       | 470,0                | m <sup>3</sup> /h |
| Qboost     | 550,0                | m <sup>3</sup> /h |
| SPEmin     | 52                   | dBa               |
| SPEmax     | 63                   | dBa               |
| SPEboost   | 66                   | dBa               |
| PO         | -                    | W                 |
| PS         | 0,48                 | W                 |
| PI         |                      |                   |
| F          | 1,1                  |                   |
| EEL        | 84,9                 |                   |
| Qbep       | 337,0                | m <sup>3</sup> /h |
| Pbep       | 298                  | Pa                |
| Qboost     | 550,0                | m <sup>3</sup> /h |
| Wbep       | 115,0                | W                 |
| WL         | 78,00                | W                 |
| Emiddle    | 91                   | lux               |
| Lwa-SPEmax | 63                   | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.