

LAGUNA

Versiune

Insula "Customizabil" 60 cm -
800 m³/h

Colectie

Design+

Cod EAN

8034122349367

CARACTERISTICI

Aspiratie perimetrala
Control electronic
Illuminare cu LED
Filtru de grasime metalic, detasabil si lavabil
Filtru de carbon inclus
Disponibil pentru panouri customizabile

ACCESORII OPTIONALE

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

CARACTERISTICI TEHNICE

Tip de instalare

Insula

Dimensiuni

60 cm

Finisaj

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Illuminare

LED 4x1,2 W - 3200 K

Filtru

2 x Filtru metalic "Base" -
235x245 mm

Filtru de Carbon

Filtru de carbon rotund Ø170 mm
- Tip 6 (inclus)

Distanta minima

Plita cu gaz: 60 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

36 kg

Greutate neta

30 kg

Volum

0.39 m³

Dimensiuni ambalaj

Lungime

1035 mm

Inaltime

510 mm

Adancime

740 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

670 m³/h

I.E.C. 61591

Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor

215 W

CLASA DE ENERGIE

B



LAGUNA

Versiune

Insula "Customizabil" 60 cm -
800 m³/h

Colectie

Design+


Cod EAN

8034122349367

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacitate (m ³ /h) I.E.C.61591	270	360	470	670
Presiune maxima (Pa)	390	420	460	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

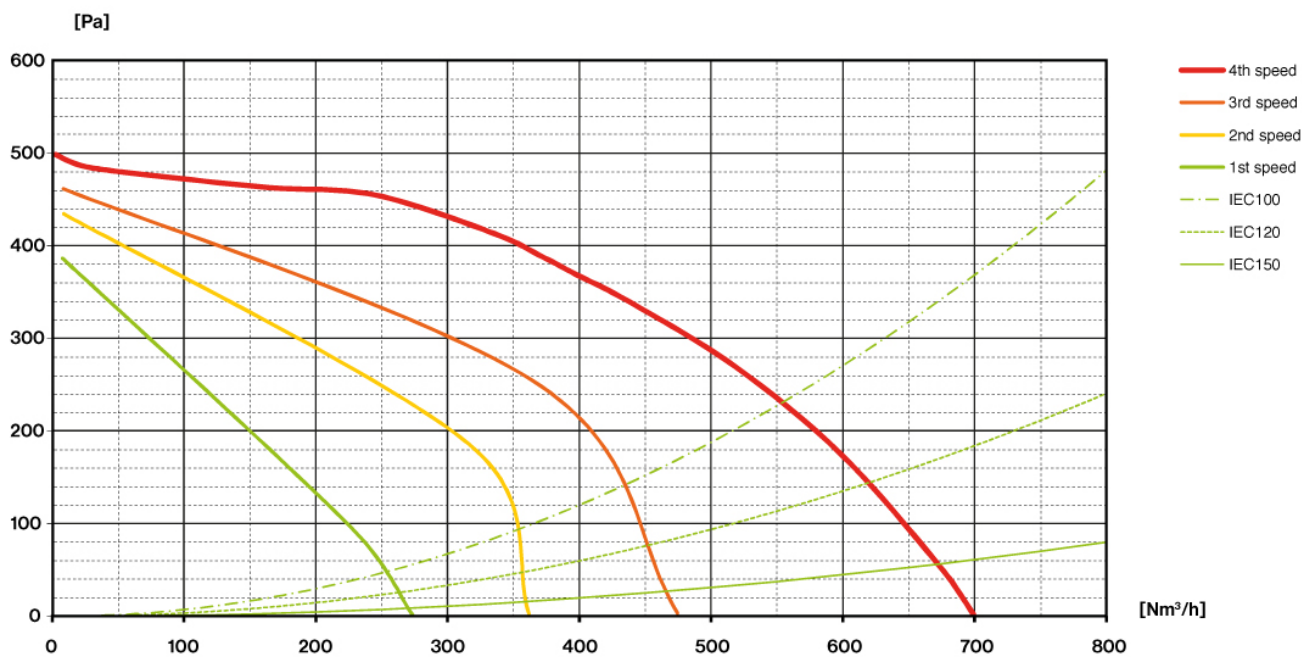

LAGUNA

Versiune

Insula "Customizabil" 60 cm -
800 m³/h


Colectie

Design+

Cod EAN

8034122349367

ETICHETA DE ENERGIE

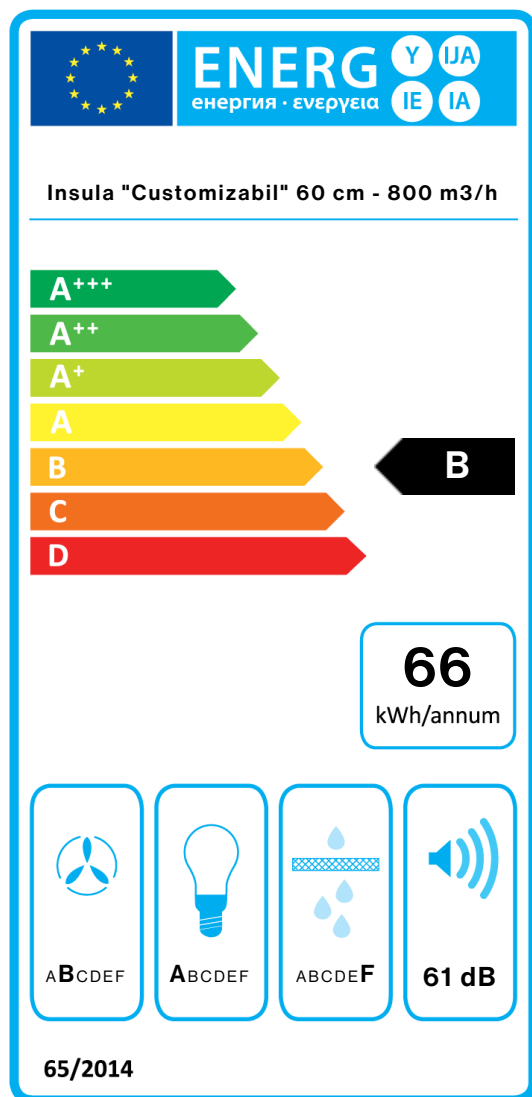

PF		
S	Falmec Spa	
M	Insula "Customizabil" 60 cm - 800 m ³ /h	
AEC	65,6	kWh/a
EEC	B	
FDE	25,5	
FDEC	B	
LE	28,4	
LEC	A	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	64,8	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	8,60	W
Emiddle	245	lex
Lwa-SPEmax	61	dBa