

STELLA

Version

Ceiling 120 cm - Inox

Collection

Design+

EAN code

8034122348971

KACL.782#49F

Slim motor 800 m³/h

Collection

Accessoires

EAN code

8034122708584



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Scotch brite stainless steel (AISI 304)

Electronic control

Metallic grease filter, removable and washable

Remote control included

Dynamic LED Light (2700K - 5600K)

Cut-out size: 505 x 1240 mm

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.782#49F

Slim motor 800 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h
Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

KACL.939#BF

Ceiling re-circulation filtering kit (only for Slim Motor)

TECHNICAL FEATURES

Installation type

Ceiling

Dimensions

120 cm

Finishing

Scotch brite stainless steel (AISI 304)

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x3,6 W - 2700 K / 5600 K

Filter

Metallic filter "Base" - 290x326 mm - 2 pz

PACKAGING:WEIGHTS AND VOLUMES

STELLA

Ceiling 120 cm - Inox

Gross weight

29.40 kg

Net weight

25.90 kg

Volume

0.18 m³

Packaging size

Length

1420 mm

Height

670 mm

Depth

190 mm

REMOTE MOTOR

Slim motor 800 m³/h

Gross weight

10.00 kg

Net weight

9.00 kg

Volumes

0.04 m³

Packaging size

Length

550 mm

Height

370 mm

Depth

175 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

190 W

Voltage / Frequency

220-240V

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

680 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

490 Pa

Max. motor power

239 W

ENERGY CLASS

C

STELLA

KACL.782#49F
Slim motor 800 m³/h

Version
Ceiling 120 cm - Inox

Collection
Accessoires

Collection
Design+


EAN code
8034122708584

EAN code
8034122348971

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	52	60	65	68
Capacity (m3/h) I.E.C.61591 Normalized Pipes	330	470	580	680
Maximum pressure (Pa)	420	460	470	490
Motor Power (W)	158	177	194	239
Air outlet	220x90220x90220x90220x90			

CAPACITY / PRESSURE

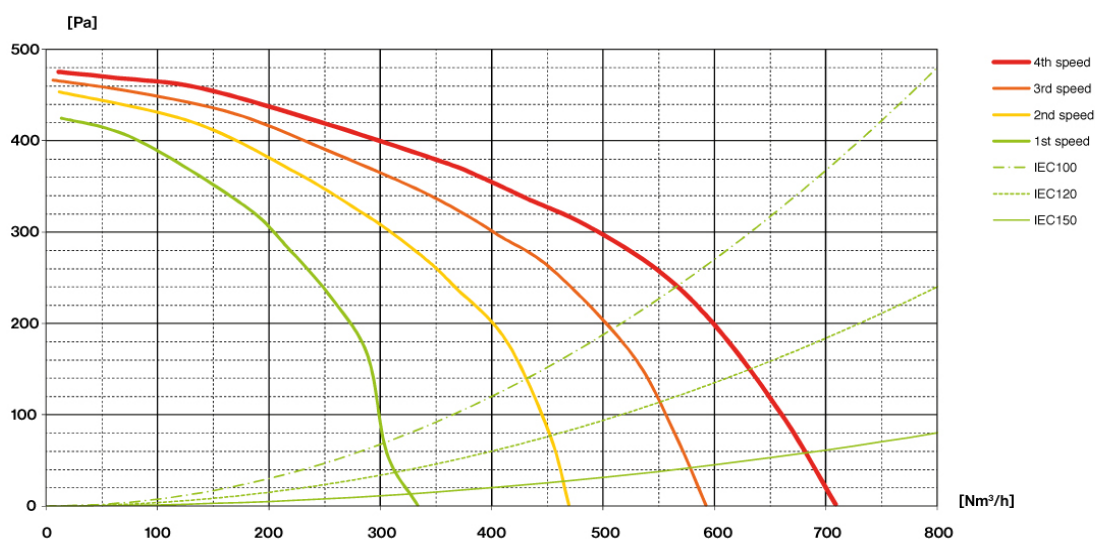

STELLA

KACL.782#49F
Slim motor 800 m³/h

Version

Ceiling 120 cm - Inox

Collection

Design+

EAN code

8034122348971


Collection

Accessoires

EAN code

8034122708584

ENERGY LABEL

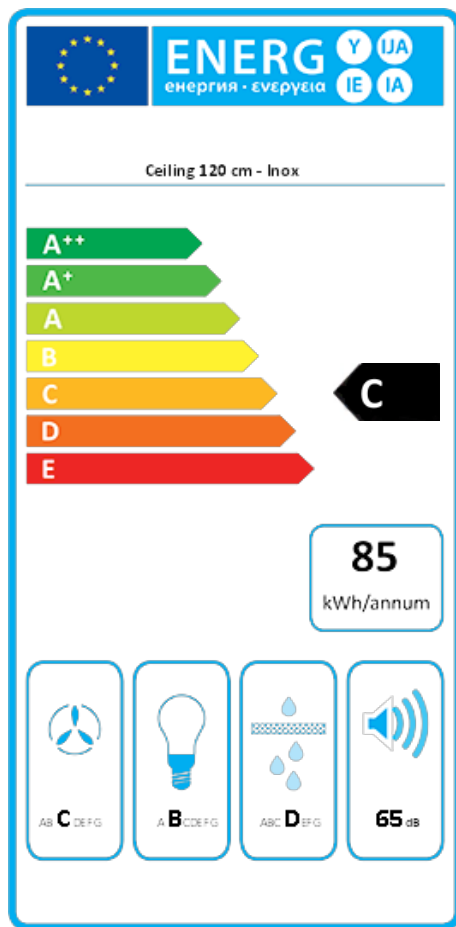

PF		
S	Falmec Spa	
M	Ceiling 120 cm - Inox	
AEC	84,8	kWh/a
ECC	C	
FDE	22,6	
FDEC	C	
LE	22,9	
LEC	B	
GFE	65,1	
GFEC	D	
Qmin	330,0	m ³ /h
Qmax	580,0	m ³ /h
Qboost	700,0	m ³ /h
SPEmin	52	dBa
SPEmax	65	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1,2	
EEl	72,6	
Qbep	488,0	m ³ /h
Pbep	285	Pa
Qboost	700,0	m ³ /h
Wbep	171,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.