falmec

LED-LINE

Loftmotorer under taget 950 m³/h

Sortiment
Design+

EAN Kode
8034122348971

Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Elektronisk kontrolpanel
Vaskbare rustfrie fedtfiltre
Fjernbetjening i tillæg
Dynamic LED Light (2700K - 5600K)
Rustfrit stål AISI 304
Motor sold separately
Mulighed for Connection kogeplade

MULIGHEDER FOR TILVALG

01-FJERN
Fjernbetjening med display
01MO-GAVL
Gavlmotor til udendørs brug 1000 m3/h
01MO-GAVL-15
Gavlmotor til udendørs brug 1500 m3/h
01MO-LOFT-13
Loftmotor 1300 m3 Ø200 mm
01MO-SLIM
Slimlinemotor 800 m3
KACL.770#41F
Loftmotorer 1100 m3/h Brushless
KACL.939#BF
Recirkulationskit (01RECIRK) til brug med Slimlinemotor. Til loftsemfang.

TEKNISK BESKRIVELSE

Installation
Emhætte til loft
Dimensioner
120 cm
Materiale
Scotch brite rustfrit stål (AISI 304)
Betjening
Elektronisk kontrolpanel
Hastighed
3 + boost
Belysning
Led 4x3,6 W - 2700 K / 5600 K
Filter
3 x Metallfiltre - Base - 290x326 mm

EMBALLAGE: VÆGT OG VOLUMEN

LED-LINE Bruttovægt
29.4 kg
Nettovægt
25.9 kg
Volumen
0.18 m³
Mål på emballage
Længde
1420 mm
Højde
190 mm
Dybde
670 mm
EKSTERN MOTOR Loftmotorer under taget 950 m³/h
Bruttovægt
10 kg
Nettovægt
9 kg
Volumen
0.06 m³
Mål på emballage
Længde
435 mm
Højde
340 mm
Dybde
385 mm

FORBRUG OG TILSLUTNINGSMULIGHER

Maksimalt forbrug
30 W
Spænding
220-240V
Frekvens
50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet
830 m³/h
I.E.C. 61591
Maksimalt støjniveau
68 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
580 Pa
Maksimal sugestyrke
270 W
ENERGIKLASSE
B

falmec

LED-LINE

Loftmotorer under taget 950
m³/h

Sortiment
Design+

EAN Kode
8034122348971

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW-I.E.C.60704-2-13	50	57	64	68
Kapacitet (m3/h) I.E.C.61591	360	480	630	830
Maksimalt tryk (Pa)	480	520	560	580
Forbrug (W)	190	220	250	270
Luftudtag	150	150	150	150

KAPACITET / TRYK

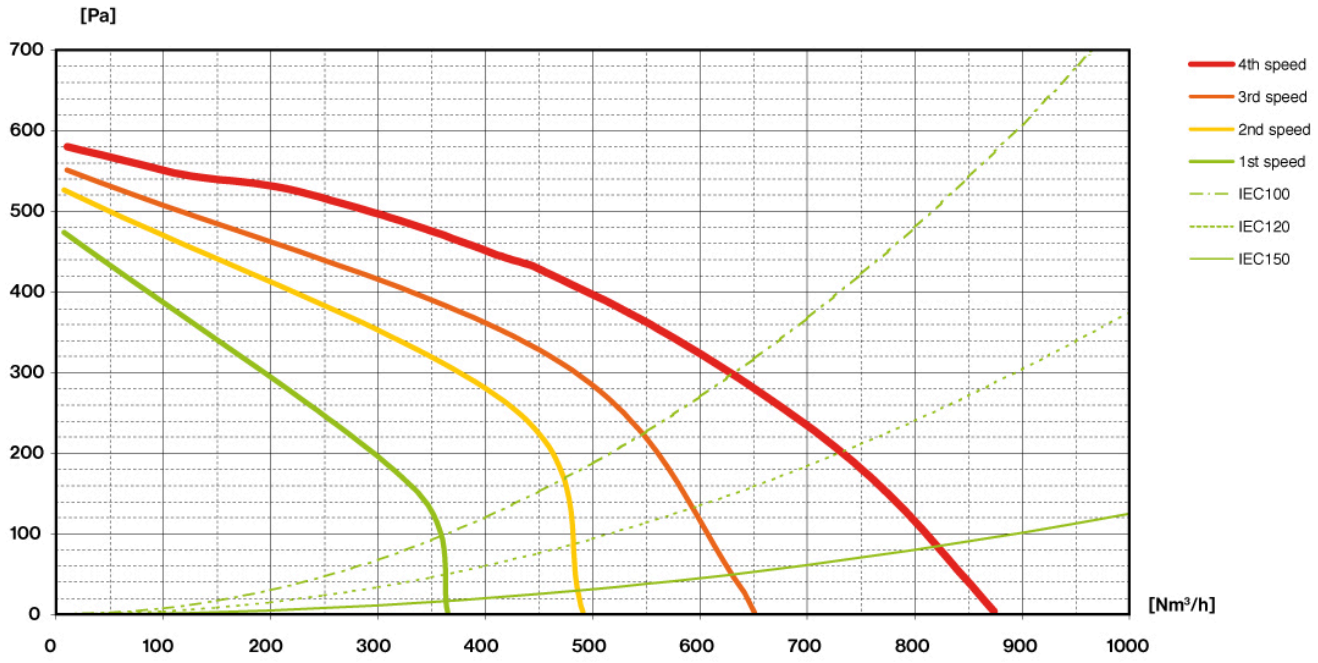

falmec

LED-LINE

Loftmotorer under taget 950 m³/h

Sortiment
Design+

EAN Kode
8034122348971

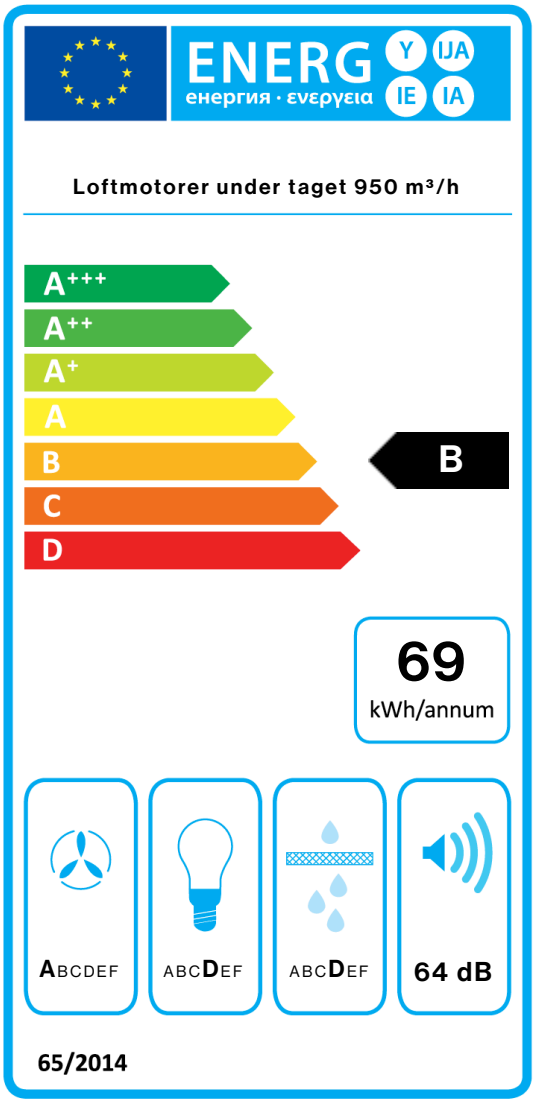

PF		
S	Falmec Spa	
M	Loftmotorer under taget 950 m³/h	
AEC	69,0	kWh/a
EEC	B	
FDE	29,5	
FDEC	A	
LE	22,9	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	360,0	m³/h
Qmax	630,0	m³/h
Qboost	830,0	m³/h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	58	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEI	56,7	
Qbep	441,0	m³/h
Pbep	434	Pa
Qboost	830,0	m³/h
Wbep	180,0	W
WL	13,50	W
Emiddle	309	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.