

STELLA

Version
Remote under-roof 1100 m³/h
Brushless

Collection
Design+

EAN code
8034122348971



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Electronic control
Metallic grease filter, removable and washable
Remote control included
Dynamic LED Light (2700K - 5600K)
Stainless steel AISI 304
Motor sold separately

Cut-out size: 505 x 1240 mm
OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.782#49F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.939#BF**
Ceiling re-circulation filtering kit (only for Slim Motor)
- 105080053**
Remote control

TECHNICAL FEATURES

Installation type
Ceiling
Dimensions
120 cm
Finishing
Scotch brite stainless steel (AISI 304)
Type of control
Electronic control
Speed settings
4
Lighting
Led 4x3,6 W - 2700 K / 5600 K
Filter
3 x Metallic filter "Base" - 290x326 mm

PACKAGING:WEIGHTS AND VOLUMES

STELLA Gross weight
29.4 kg
Net weight
25.9 kg
Volumes
0.18 m³
Packaging size

Length
1420 mm
Height
190 mm
Depth
670 mm

REMOTE MOTOR Remote under-roof 1100 m³/h
Brushless **Gross weight**

9.2 kg
Net weight
8 kg
Volumes
0.06 m³

Packaging size
Length
435 mm
Height
340 mm
Depth
385 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
30 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko
ENERGY CLASS
A


STELLA

Version
Remote under-roof 1100 m³/h
Brushless

Collection
Design+

EAN code
8034122348971

ENERGY LABEL

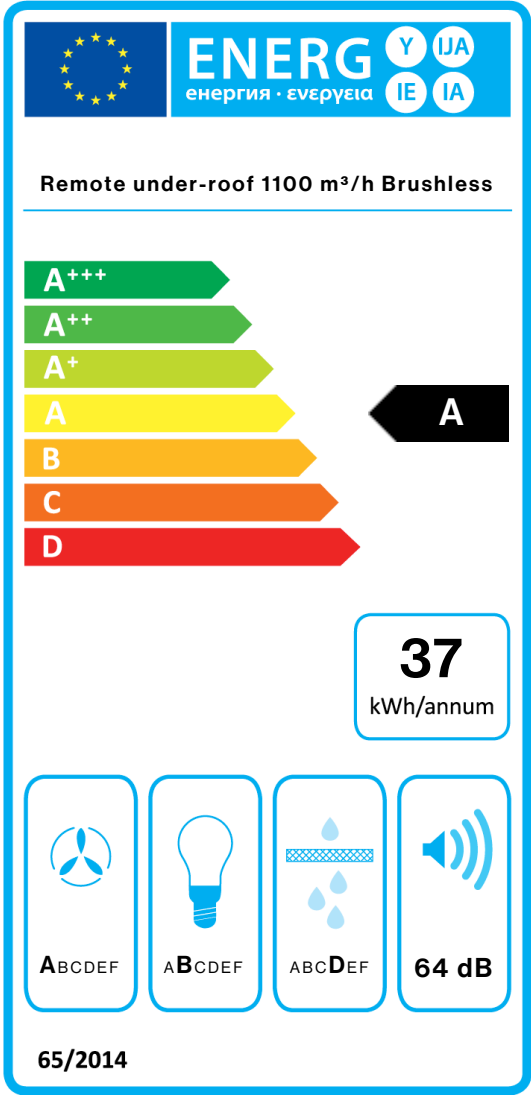

PF		
S	Falmec Spa	
M	Remote under-roof 1100 m³/h Brushless	
AEC	37,2	kWh/a
EEC	A	
FDE	36,9	
FDEC	A	
LE	22,9	
LEC	B	
GFE	65,1	
GFEC	D	
Qmin	350,0	m³/h
Qmax	660,0	m³/h
Qboost	850,0	m³/h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	0.7	
EEL	45,6	
Qbep	405,0	m³/h
Pbep	351	Pa
Qboost	850,0	m³/h
Wbep	107,0	W
WL	13,50	W
Emiddle	309	lex
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.