

## STELLA

### Version

Ceiling 90 cm - Inox

### Collection

Design+

### EAN code

8034122348988

## KACL.782#49F

Slim motor 800 m<sup>3</sup>/h

### Collection

Accessoires

### EAN code

8034122708584



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Scotch brite stainless steel (AISI 304)**

**Perimeter suction**

**Electronic control**

**Metallic grease filter, removable and washable**

**Remote control included**

**Dynamic LED Light (2700K - 5600K)**

Cut-out size: 505 x 940 mm

## OPTIONAL ACCESSORIES

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

### KACL.782#49F

Slim motor 800 m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

### KACL.939#BF

Ceiling re-circulation filtering kit (only for Slim Motor)

## TECHNICAL FEATURES

### Installation type

Ceiling

### Dimensions

90 cm

### Finishing

Scotch brite stainless steel (AISI 304)

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 4x3,6 W - 2700 K / 5600 K

### Filter

Metallic filter "Base" - 290x326 mm - 2 pz

## PACKAGING:WEIGHTS AND VOLUMES

### STELLA

Ceiling 90 cm - Inox

### Gross weight

24.50 kg

### Net weight

21.70 kg

### Volume

0.14 m<sup>3</sup>

### Packaging size

Length

1120 mm

Height

670 mm

Depth

190 mm

### REMOTE MOTOR

Slim motor 800 m<sup>3</sup>/h

### Gross weight

10.00 kg

### Net weight

9.00 kg

### Volumes

0.04 m<sup>3</sup>

### Packaging size

Length

550 mm

Height

370 mm

Depth

175 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

190 W

### Voltage / Frequency

220-240V

50-60Hz

### Plug type

Shuko

### ENERGY CLASS

C

## STELLA

**KACL.782#49F**  
Slim motor 800 m<sup>3</sup>/h

### Version

Ceiling 90 cm - Inox

### Collection

Design+

### EAN code

8034122348988


### Collection

Accessoires

### EAN code

8034122708584

## ENERGY LABEL

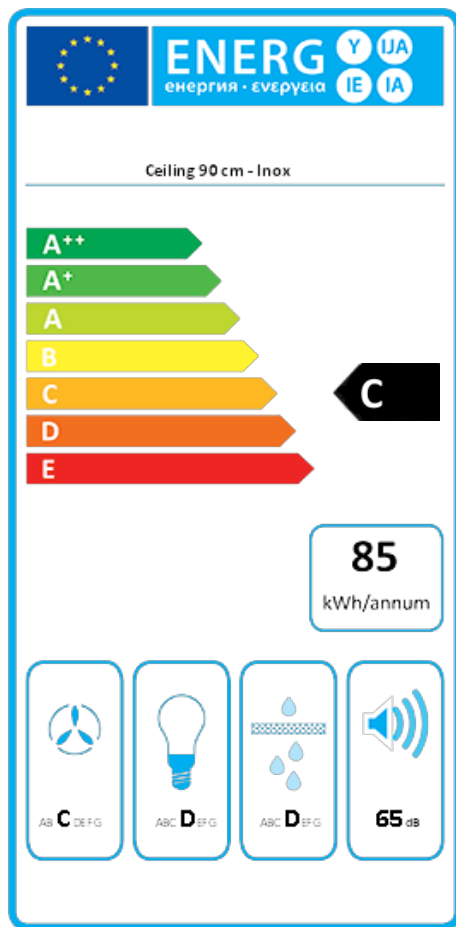

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	Ceiling 90 cm - Inox	
<b>AEC</b>	84,8	kWh/a
<b>ECC</b>	C	
<b>FDE</b>	22,6	
<b>FDEC</b>	C	
<b>LE</b>	22,9	
<b>LEC</b>	D	
<b>GFE</b>	65,1	
<b>GFEC</b>	D	
<b>Qmin</b>	330,0	m <sup>3</sup> /h
<b>Qmax</b>	580,0	m <sup>3</sup> /h
<b>Qboost</b>	700,0	m <sup>3</sup> /h
<b>SPEmin</b>	52	dBa
<b>SPEmax</b>	65	dBa
<b>SPEboost</b>	68	dBa
<b>PO</b>	-	W
<b>PS</b>	0,48	W
PI		
<b>F</b>	1,2	
<b>EEl</b>	72,6	
<b>Qbep</b>	488,0	m <sup>3</sup> /h
<b>Pbep</b>	285	Pa
<b>Qboost</b>	700,0	m <sup>3</sup> /h
<b>Wbep</b>	171,0	W
<b>WL</b>	13,50	W
<b>Emiddle</b>	309	lux
<b>Lwa-SPEmax</b>	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.