

STELLA

Versiune

Motor Slim 800 m³/h

Colectie

Design+

Cod EAN

8034122348988



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Aspiratie perimetrala
Control electronic
Filtru de grasime metalic, detasabil si lavabil
Telecomanda inclusa
Dynamic LED Light (2700K - 5600K)
Motor sold separat

Dimensiune decupaj: 505x940 mm

ACCESORII OPTIONALE

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.782#49F

Motor Slim 800 m³/h

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

KACL.928

Filtre de schimb

KACL.939#BF

Kit de filtrare pentru verisunea recirculare in plafon (doar pentru Motorul Slim)

KACL.942#ZZB401F

E.ion™ ceiling re-circulation filtering kit (only for Slim Motor)

CARACTERISTICI TEHNICE

Tip de instalare

De plafon

Dimensiuni

90 cm

Finisaj

Inox Scotch Brite (AISI 304)

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

Led 4x3,6 W - 2700 K / 5600 K

Filtru

2 x Filtru metalic "Base" - 290x326 mm

Plita cu gaz: 150 cm

Plita electrica: 150 cm

AMBALARE: GREUTATE SI VOLUM

STELLA Greutate bruta

24.5 kg

Greutate neta

21.7 kg

Volum

0.14 m³

Dimensiuni ambalaj

Lungime

1120 mm

Inaltime

190 mm

Adancime

670 mm

TELECOMANDA Motor Slim

800 m³/h **Greutate bruta**

6.5 kg

Greutate neta

5.2 kg

Volum

0.04 m³

Dimensiuni ambalaj

Lungime

575 mm

Inaltime

195 mm

Adancime

395 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

30 W

Curent

220-240V

Frecventa


50-60Hz

Tip stecher

Shuko

CLASA DE ENERGIE

C



Hood and motor dimension

STELLA

Versiune

Motor Slim 800 m³/h


Colectie

Design+

Cod EAN

8034122348988

ETICHETA DE ENERGIE

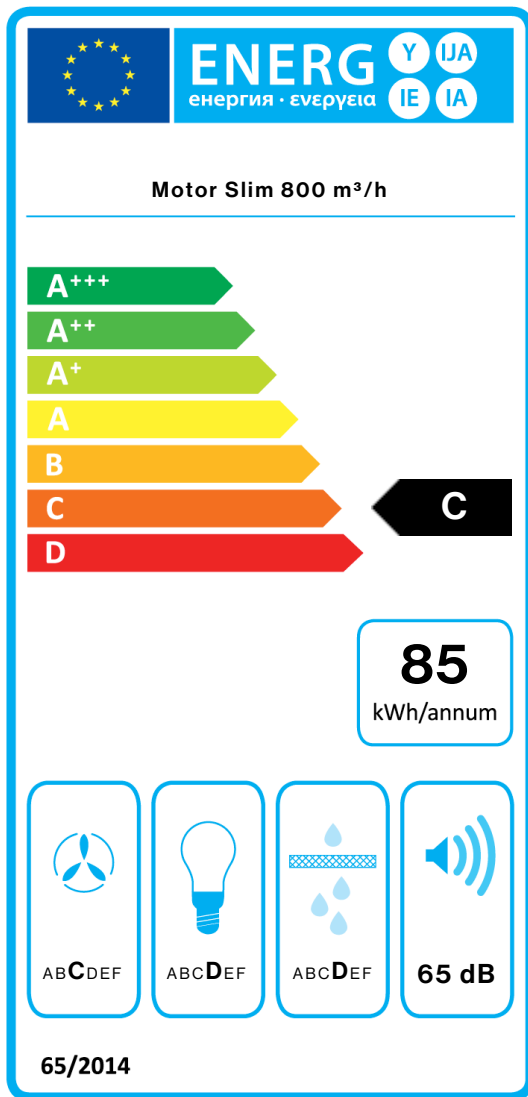

PF		
S	Falmec Spa	
M	Motor Slim 800 m ³ /h	
AEC	84,8	kWh/a
EEC	C	
FDE	22,6	
FDEC	C	
LE	22,9	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	330,0	m ³ /h
Qmax	580,0	m ³ /h
Qboost	700,0	m ³ /h
SPEmin	52	dBa
SPEmax	65	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.2	
EEl	72,6	
Qbep	488,0	m ³ /h
Pbep	285	Pa
Qboost	700,0	m ³ /h
Wbep	171,0	W
WL	13,50	W
Emiddle	309	lex
Lwa-SPEmax	65	dBa