

## LED-LINE

Loftmotorer under taget 950 m<sup>3</sup>/h

### Sortiment

Design+

### EAN Kode

8034122348988



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

**Kantsug**  
**Elektronisk kontrolpanel**  
**Vaskbare rustfrie fedtfiltere**  
**Fjernbetjening i tillæg**  
**Dynamic LED Light (2700K - 5600K)**  
**Motor sold separately**

## MULIGHEDER FOR TILVALG

### 01-FJERN

Fjernbetjening med display

#### 01KU-928

Kulfilter til recirkulationsblock  
KACL.939#BF

#### 01MO-GAVL

Gavlmotor til udendørs brug  
1000 m<sup>3</sup>/h

#### 01MO-GAVL-15

Gavlmotor til udendørs brug  
1500 m<sup>3</sup>/h

#### 01MO-LOFT

Loftmotorer under taget 950 m<sup>3</sup>/h

#### 01MO-LOFT-13

Loftmotor 1300 m<sup>3</sup> Ø200 mm

#### 01MO-SLIM

Slimlinemotor 800 m<sup>3</sup>

#### KACL.770#41F

Loftmotorer 1100 m<sup>3</sup>/h

Brushless

#### KACL.939#BF

Recirkulationskit (01RECIRK) til brug med Slimlinemotor. Til loftseffang.

## TEKNISK BESKRIVELSE

### Installation

Emhætte til loft

### Dimensioner

90 cm

### Materiale

Scotch brite rustfrit stål (AISI 304)

### Betjening

Elektronisk kontrolpanel

### Hastighed

3 + boost

### Belysning

Led 4x3,6 W - 2700 K / 5600 K

### Filter

2 x Metallfiltere - Base - 290x326 mm

Gaskomfur: 150 cm

Kogeplade: 150 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### LED-LINE Bruttovægt

24.5 kg

### Nettovægt

21.7 kg

### Volumen

0.14 m<sup>3</sup>

### Mål på emballage

Længde

1120 mm

Højde

190 mm

Dybde

670 mm

### EKSTERN MOTOR Loftmotorer under taget 950 m<sup>3</sup>/h

#### Bruttovægt

10 kg

#### Nettovægt

9 kg

#### Volumen

0.06 m<sup>3</sup>

#### Mål på emballage

Længde

435 mm

Højde

340 mm

Dybde

385 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

30 W

### Spænding

220-240V


### Frekvens

50-60Hz

Shuko

### ENERGIKLASSE

B

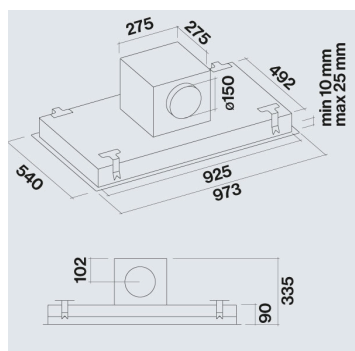

## LED-LINE


Loftmotorer under taget 950  
m<sup>3</sup>/h

### Sortiment

Design+

### EAN Kode

8034122348988

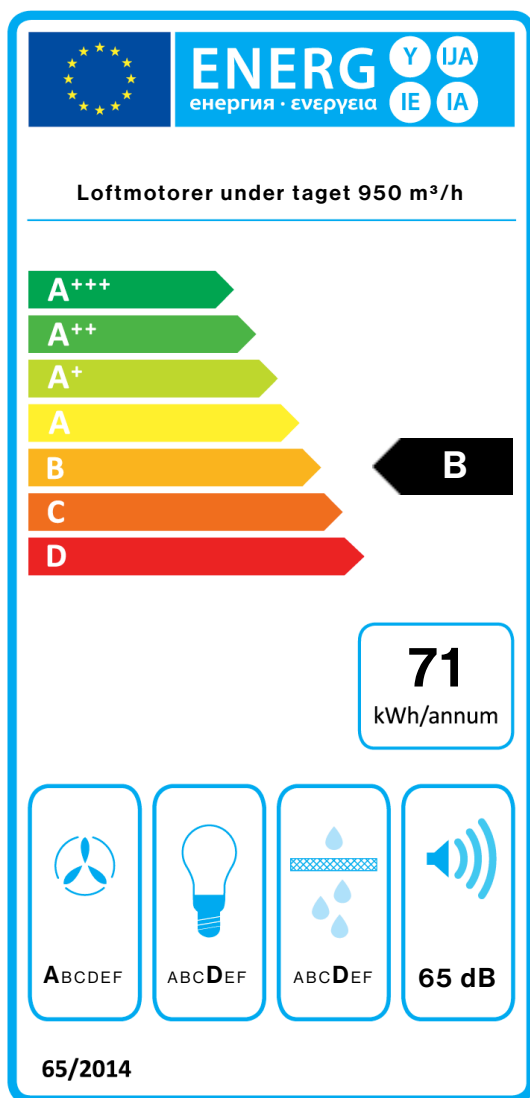

PF		
S	Falmec Spa	
M	Loftmotorer under taget 950 m <sup>3</sup> /h	
AEC	71,3	kWh/a
EEC	B	
FDE	29,5	
FDEC	A	
LE	12,8	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	360,0	m <sup>3</sup> /h
Qmax	630,0	m <sup>3</sup> /h
Qboost	880,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,68	W
PI		
F	0.9	
EEI	57,7	
Qbep	441,0	m <sup>3</sup> /h
Pbep	434	Pa
Qboost	880,0	m <sup>3</sup> /h
Wbep	180,0	W
WL	16,70	W
Emiddle	214	lux
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.