

STELLA

**Version**  
Remote under-roof 1100 m³/h  
Brushless

**Collection**  
Design+

**EAN code**  
8034122348988



The photograph is purely for information  
It may not correspond to the selected version.

FEATURES

**Perimeter suction**  
**Electronic control**  
**Metallic grease filter, removable and washable**  
**Remote control included**  
**Dynamic LED Light (2700K - 5600K)**  
**Motor sold separately**

Cut-out size: 505 x 940 mm  
**OPTIONAL ACCESSORIES**

- KACL.770#41F**  
Remote under-roof 1100 m3/h  
Brushless
- KACL.782#49F**  
Slim motor 800 m3/h
- KACL.786#41F**  
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**  
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**  
Remote under-roof motor 1300 m3/h
- KACL.798#41F**  
Remote under-roof motor 950 m3/h
- KACL.928**  
Filters spare
- KACL.939#BF**  
Ceiling re-circulation filtering kit (only for Slim Motor)
- 105080053**  
Remote control

TECHNICAL FEATURES

**Installation type**  
Ceiling  
**Dimensions**  
90 cm  
**Finishing**  
Scotch brite stainless steel (AISI 304)  
**Type of control**  
Electronic control  
**Speed settings**  
4  
**Lighting**  
Led 4x3,6 W - 2700 K / 5600 K  
**Filter**  
2 x Metallic filter "Base" - 290x326 mm  
**Maximum distance**  
Gas hob: 150 cm  
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

**STELLA Gross weight**  
24.5 kg  
**Net weight**  
21.7 kg  
**Volumes**  
0.14 m³  
**Packaging size**  
Length  
1120 mm  
Height  
190 mm  
Depth  
670 mm

**REMOTE MOTOR** Remote under-roof 1100 m³/h  
Brushless **Gross weight**  
9.2 kg  
**Net weight**  
8 kg  
**Volumes**  
0.06 m³  
**Packaging size**  
Length  
435 mm  
Height  
340 mm  
Depth  
385 mm

CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
30 W  
**Voltage**  
220-240V  
**Frequency**  
50-60Hz  
**Plug type**  
Shuko  
**ENERGY CLASS**  
A


STELLA

Version  
Remote under-roof 1100 m³/h  
Brushless

Collection  
Design+

EAN code  
8034122348988

ENERGY LABEL

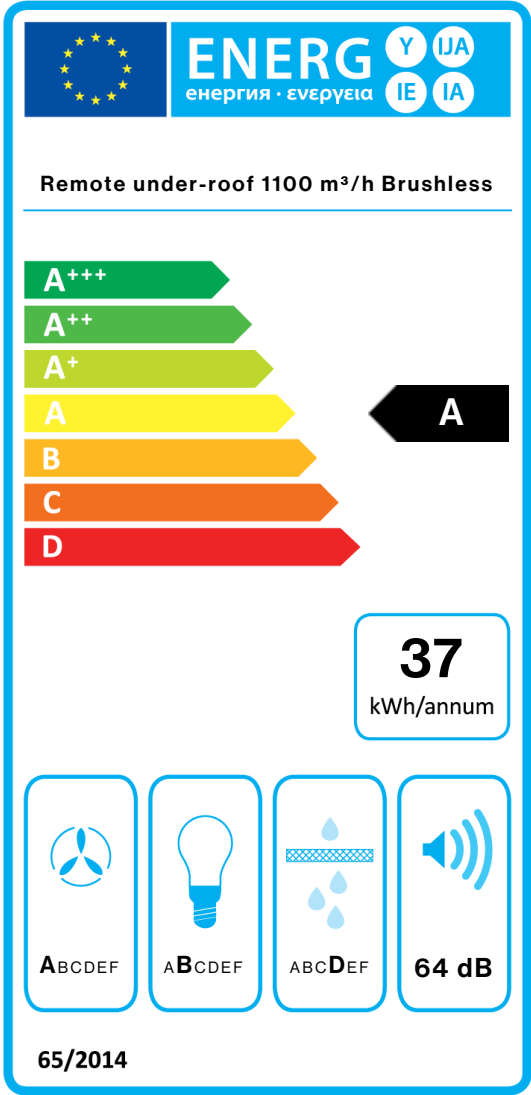

| PF         |                                       |       |
|------------|---------------------------------------|-------|
| S          | Falmec Spa                            |       |
| M          | Remote under-roof 1100 m³/h Brushless |       |
| AEC        | 37,2                                  | kWh/a |
| EEC        | A                                     |       |
| FDE        | 36,9                                  |       |
| FDEC       | A                                     |       |
| LE         | 22,9                                  |       |
| LEC        | B                                     |       |
| GFE        | 65,1                                  |       |
| GFEC       | D                                     |       |
| Qmin       | 350,0                                 | m³/h  |
| Qmax       | 660,0                                 | m³/h  |
| Qboost     | 850,0                                 | m³/h  |
| SPEmin     | 50                                    | dBa   |
| SPEmax     | 64                                    | dBa   |
| SPEboost   | 68                                    | dBa   |
| PO         | -                                     | W     |
| PS         | 0,48                                  | W     |
| PI         |                                       |       |
| F          | 0.7                                   |       |
| EEL        | 45,6                                  |       |
| Qbep       | 405,0                                 | m³/h  |
| Pbep       | 351                                   | Pa    |
| Qboost     | 850,0                                 | m³/h  |
| Wbep       | 167,0                                 | W     |
| WL         | 13,50                                 | W     |
| Emiddle    | 309                                   | lex   |
| Lwa-SPEmax | 64                                    | dBa   |

PF\_Product fiche according to 65/2014 S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). PI\_Additional information according to 66/2014 F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.