

## LUCE

Væg - 90 cm - Sort - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122348261



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Rustfrit stål (AISI 304) scotch brite  
Sort tempereret glas  
Touch control og 24 t. funktion  
Neonlys  
TOP Vaskbare rustfrie fedtfiltere  
Kulfilter

## MULIGHEDER FOR TILVALG

### 07MAGIC

Beskyttende rensklude til rustfrit stål. Kasse med 10 klude

### KACL.510#I

Forlænger H700 væg

### KACL.512#I

Forlænger H960 væg

### KACL.864

Air flow conveyer til recirkulation. Væghængte modeller.

## TEKNISK BESKRIVELSE

### Installation

Væg

### Dimensioner

90 cm

### Materiale

Scotch brite rustfrit stål (AISI 304)

Sort tempereret glas

### Motor

800 m<sup>3</sup>/h

### Betjening

Betjening med touch

### Hastighed

3 + boost

### Belysning

Neon 1x21 W

### Filter

3 x Metalfiltere Top vægmodeller  
285x301 mm

### Kulfilter

Rektangulært kulfilter. Type 3 (Tilvalg)

### Minimumsafstand

Gaskomfur: 63 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

26 kg

### Nettovægt

21 kg

### Volumen

0.26 m<sup>3</sup>

### Mål på emballage

Længde

995 mm

Højde

440 mm

Dybde

595 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

320 W

### Spænding

220-240V

### Frekvens

50-60Hz

Shuko

### DATABLAD MOTOR

#### Maksimal kapacitet

680 m<sup>3</sup>/h

I.E.C. 61591

#### Maksimalt støjniveau

68 dB(A)re1pW

I.E.C.60704-2-13

#### Maksimalt tryk (Pa)


500 Pa

#### Maksimal sugestyrke

215 W

### ENERGIKLASSE

B



## LUCE

Væg - 90 cm - Sort - 800 m<sup>3</sup>/h

### Sortiment

Design


### EAN Kode

8034122348261

### DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	56	62	68
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

### KAPACITET / TRYK

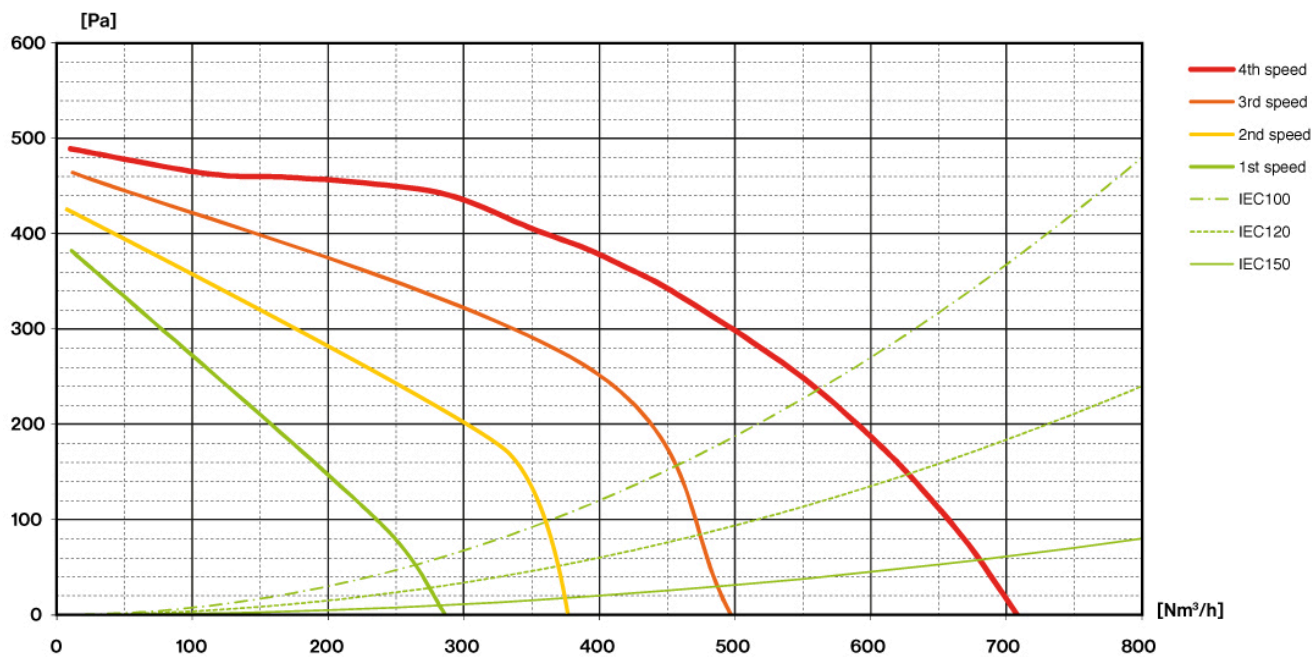

## LUCE


Væg - 90 cm - Sort - 800 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122348261

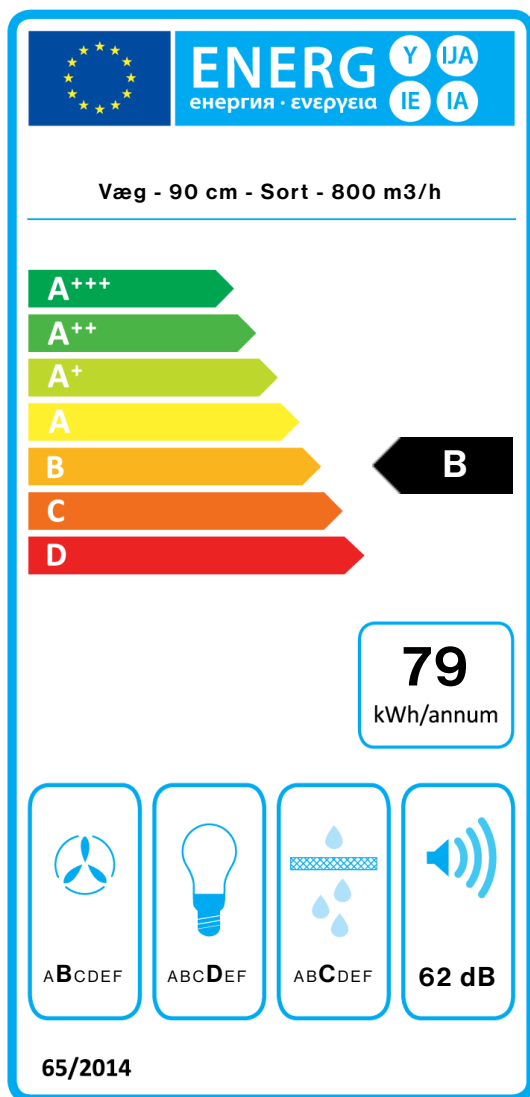

PF		
S	Falmec Spa	
M	Væg - 90 cm - Sort - 800 m <sup>3</sup> /h	
AEC	79,1	kWh/a
EEC	B	
FDE	26,3	
FDEC	B	
LE	14,6	
LEC	D	
GFE	80,0	
GFEC	C	
Qmin	280,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEL	69,8	
Qbep	382,0	m <sup>3</sup> /h
Pbep	384	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	155,1	W
WL	23,00	W
Emiddle	336	lux
Lwa-SPEmax	62	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.