falmec

LUCE

Frithængt - 90 cm - Sort - 800 m3/h

Sortiment
Design

EAN Kode
8034122348247

Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Rustfrit stål (AISI 304) scotch brite
Sort tempereret glas
Touch control og 24 t. funktion
Neonlys
TOP Vaskbare rustfrie fedtfiltre
Kulfilter

MULIGHEDER FOR TILVALG

07MAGIC
Beskyttende renseklude til rustfrit stål. Kasse med 10 klude
KACL.557#I
Forlænger H1200 frithængt
KACL.866
Air flow conveyer til recirkulation. Frithængte modeller.

TEKNISK BESKRIVELSE

Installation
Frithængt
Dimensioner
90 cm
Materiale
Scotch brite rustfrit stål (AISI 304)
Sort tempereret glas
Motor
800 m³/h
Betjening
Betjening med touch
Hastighed
3 + boost
Belysning
Neon 2x21 W
Filter
3 x Metalfiltre Top vægmodeller 285x301 mm
Kulfilter
Rektangulært kulfilter. Type 3 (Tilvalg)
Minimumsafstand
Gaskomfur: 63 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
38 kg
Nettovægt
32 kg
Volumen
0.34 m³
Mål på emballage
Længde
1035 mm
Højde
450 mm
Dybde
740 mm

FORBRUG OG TILSLUTNINGSMULIGHER

Maksimalt forbrug
320 W
Spænding
220-240V
Frekvens
50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet
680 m³/h
I.E.C. 61591
Maksimalt støjniveau
68 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
500 Pa
Maksimal sugestyrke
215 W
ENERGIKLASSE
C



falmec

LUCE

Frithængt - 90 cm - Sort - 800 m3/h

Sortiment
Design

EAN Kode
8034122348247

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Kapacitet (m3/h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

KAPACITET / TRYK

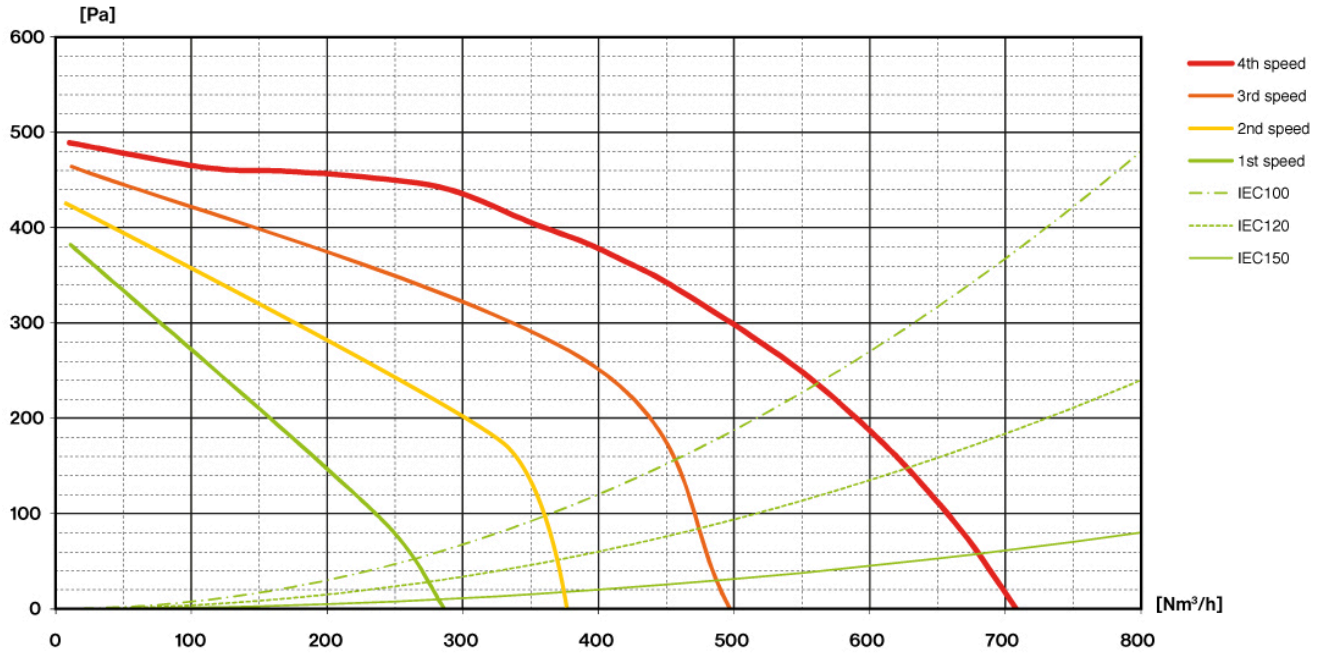

falmec

LUCE

Frithængt - 90 cm - Sort - 800 m3/h

Sortiment
Design

EAN Kode
8034122348247

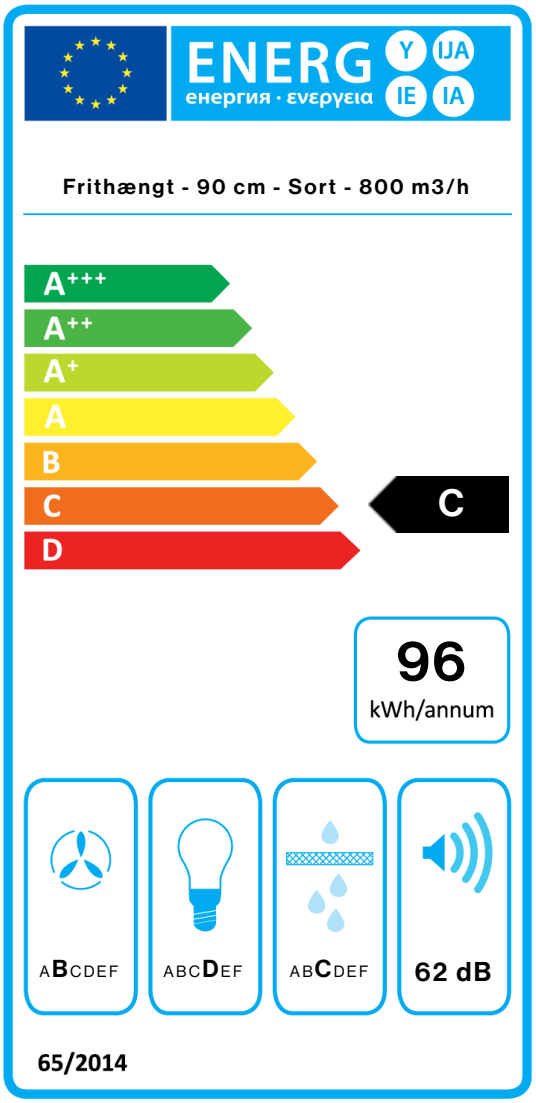

PF		
S	Falmec Spa	
M	Frithængt - 90 cm - Sort - 800 m3/h	
AEC	95,9	kWh/a
EEC	C	
FDE	26,3	
FDEC	B	
LE	12,3	
LEC	D	
GFE	80,0	
GFEC	C	
Qmin	280,0	m³/h
Qmax	480,0	m³/h
Qboost	680,0	m³/h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEI	76,2	
Qbep	382,0	m³/h
Pbep	384	Pa
Qboost	680,0	m³/h
Wbep	155,1	W
WL	46,00	W
Emiddle	568	lux
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.