

## DOWN DRAFT

### Version

Remote under-roof motor 950 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122348582



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Perimeter suction  
Touch control + 24 h function  
LED lighting  
Top filter, removable and washable  
Optional remote control

Panoramic hobs are recommended with this hood.

## OPTIONAL ACCESSORIES

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

## TECHNICAL FEATURES

**Installation type**  
Worktop

**Dimensions**  
120 cm

**Finishing**  
Scotch brite stainless steel (AISI 304)

**Type of control**  
Touch control

**Speed settings**  
4

**Lighting**  
Led stripe

**Ambient lighting**  
Led strip

**Filter**  
2 x Metallic filter "Top" - 404x216 mm

**Charcoal filter**  
Kit filters Carbon.Zeo (optional)

## PACKAGING:WEIGHTS AND VOLUMES

### DOWN DRAFT Gross weight

52.6 kg

### Net weight

43.2 kg

### Volumes

0.43 m<sup>3</sup>

### Packaging size

Length

1395 mm

Height

355 mm

Depth

865 mm

### REMOTE MOTOR Remote under-roof motor 950 m<sup>3</sup>/h

### Gross weight

10 kg

### Net weight

9 kg

### Volumes

0.06 m<sup>3</sup>

### Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

30 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

730 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)

580 Pa

### Max. motor power

240 W

## ENERGY CLASS

B

## DOWN DRAFT

### Version

Remote under-roof motor 950  
m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122348582

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	51	59	64	68
Capacity (m <sup>3</sup> /h) I.E.C.61591	330	480	610	730
Maximum pressure (Pa)	460	520	560	580
Motor Power (W)	187	210	225	240
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

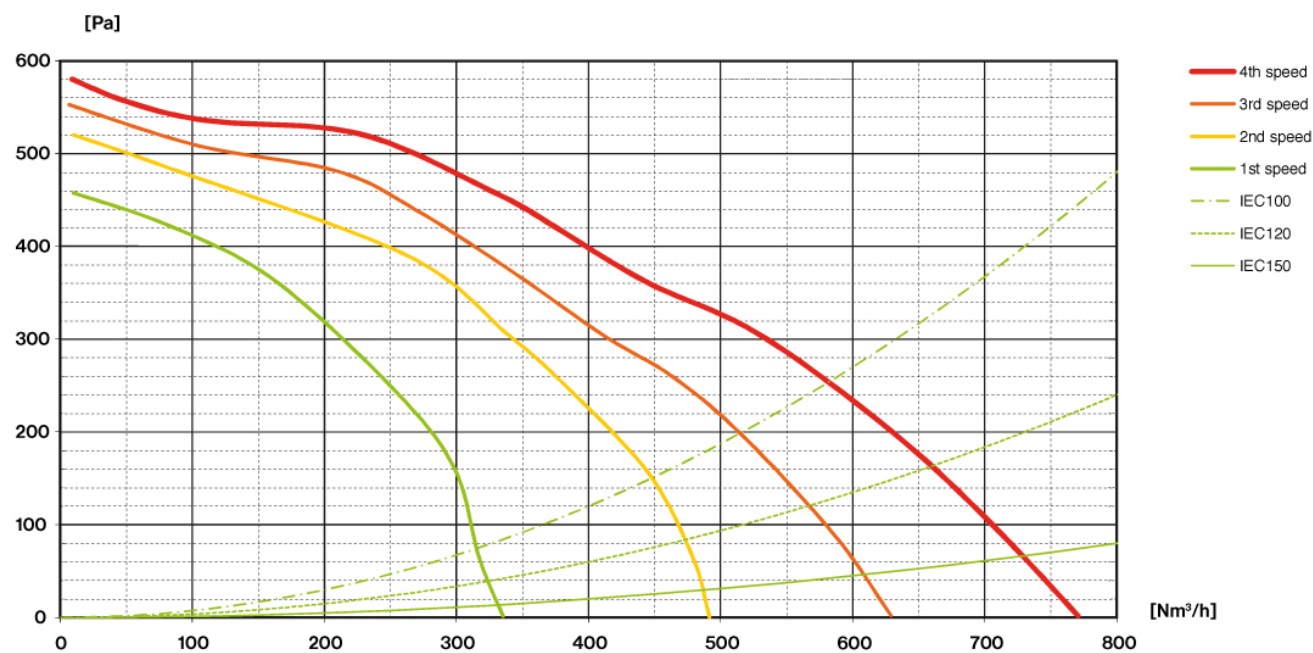

## DOWN DRAFT

### Version

Remote under-roof motor 950  
m<sup>3</sup>/h


### Collection

Design+

### EAN code

8034122348582

## ENERGY LABEL

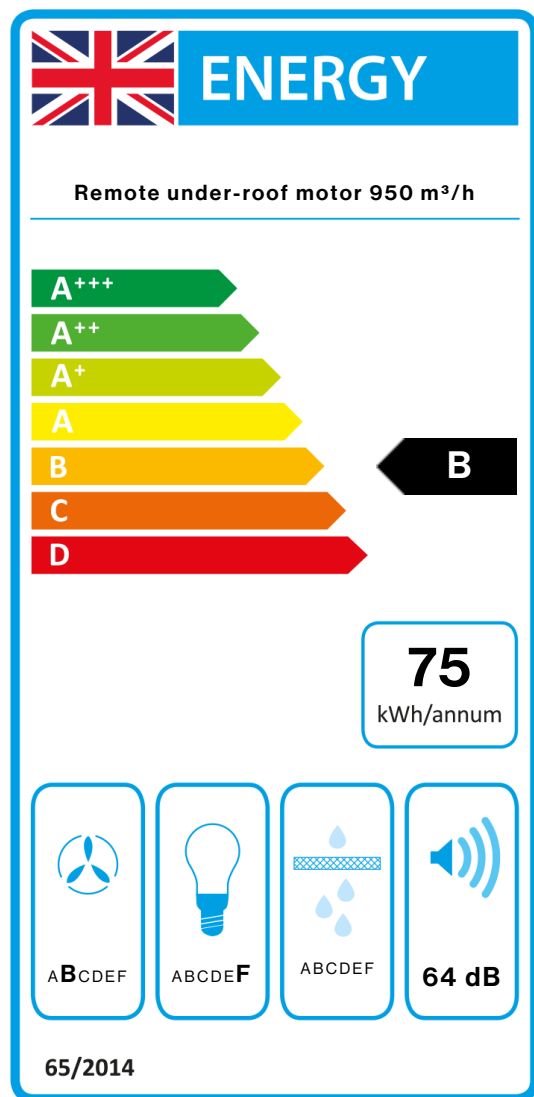

PF		
S	Falmec Spa	
M	Remote under-roof motor 950 m <sup>3</sup> /h	
AEC	75,4	kWh/a
EEC	B	
FDE	24,6	
FDEC	B	
LE	6,5	
LEC	F	
GFE	36,0	
GFEC	G	
Qmin	330,0	m <sup>3</sup> /h
Qmax	610,0	m <sup>3</sup> /h
Qboost	730,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,95	W
PI		
F	1.1	
EEL	65,2	
Qbep	369,0	m <sup>3</sup> /h
Pbep	422	Pa
Qboost	730,0	m <sup>3</sup> /h
Wbep	176,0	W
WL	6,50	W
Emiddle	42	lex
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.