

DOWN DRAFT

KACL.798#41F

120 -

EAN

8034122709833

Design+

EAN

8034122348582



(AISI 304)

120 cm

(AISI 304)

4

DOWN DRAFT

120 -

275 W

52.60 kg

220-240V

43.20 kg

Volume

50-60Hz

0.43 m³

Shuko

1395 mm

865 mm

355 mm

730 m³/h
I.E.C. 61591

68 dB(A)re1pW
I.E.C.60704-2-13

10.00 kg

580 Pa

KACL.815

(10)

9.00 kg

240 W

0.06 m³

B

435 mm

340 mm

385 mm

DOWN DRAFT

KACL.798#41F

120 -

EAN

8034122709833


Design+

EAN

8034122348582

| | 1 | 2 | 3 | 4 |
|---------------------------------|-----|-----|-----|-----|
| dB(A)re1pW-I.E.C.60704-2-13 | 51 | 59 | 64 | 68 |
| I.E.C.61591 (m ³ /h) | 330 | 480 | 610 | 730 |
| () | 460 | 520 | 560 | 580 |
| (W) | 187 | 210 | 225 | 240 |
| | 150 | 150 | 150 | 150 |

/

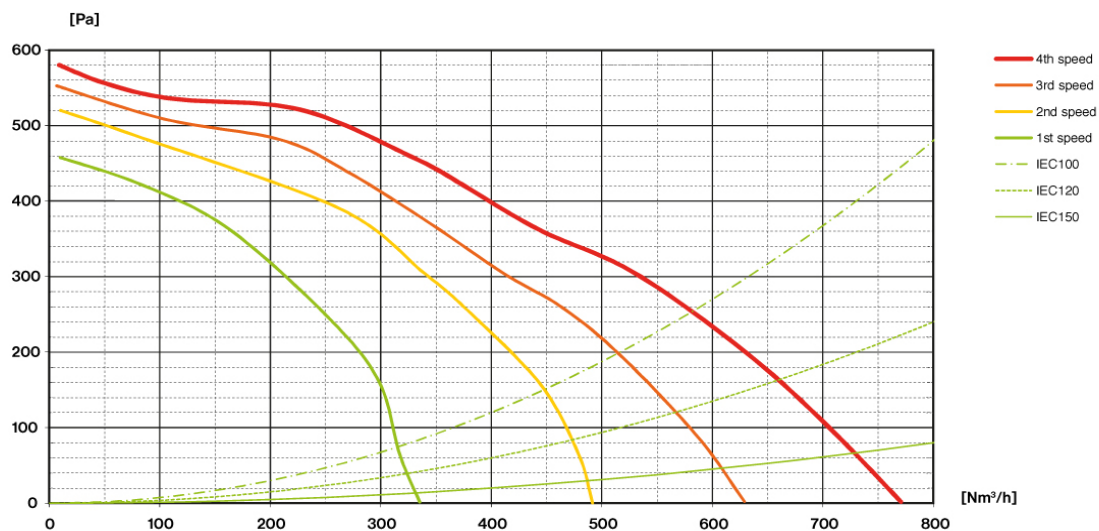

DOWN DRAFT

KACL.798#41F

120 -


EAN

8034122709833

Design+

EAN

8034122348582

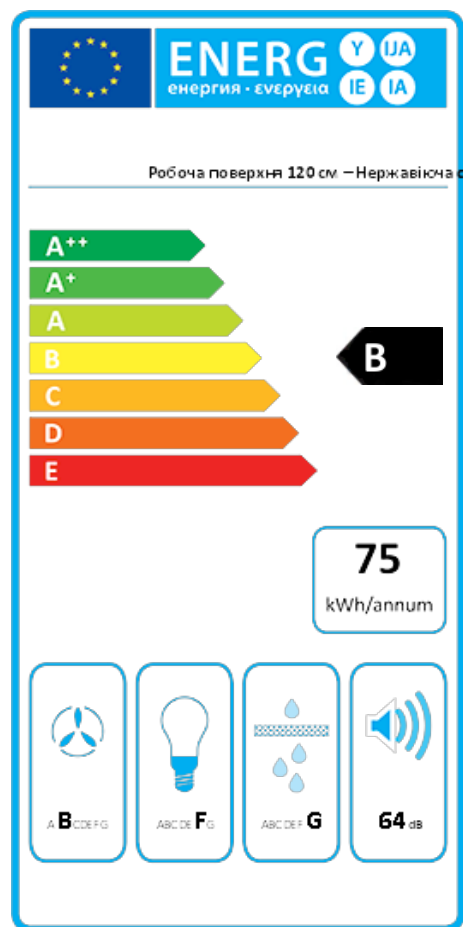

| PF | | |
|------------|------------|-------------------|
| S | Falmec Spa | |
| M | 120 - | |
| AEC | 75,4 | kWh/a |
| ECC | B | |
| FDE | 24,6 | |
| FDEC | B | |
| LE | 6,5 | |
| LEC | F | |
| GFE | 36,0 | |
| GFEC | G | |
| Qmin | 330,0 | m ³ /h |
| Qmax | 610,0 | m ³ /h |
| Qboost | 730,0 | m ³ /h |
| SPEmin | 51 | dBa |
| SPEmax | 64 | dBa |
| SPEboost | 68 | dBa |
| PO | - | W |
| PS | 0,95 | W |
| PI | | |
| F | 1,1 | |
| EEl | 65,2 | |
| Qbep | 369,0 | m ³ /h |
| Pbep | 422 | Pa |
| Qboost | 730,0 | m ³ /h |
| Wbep | 176,0 | W |
| WL | 6,50 | W |
| Emiddle | 42 | lex |
| Lwa-SPEmax | 64 | dBa |