

DOWN DRAFT

Version

Slim motor 800 m³/h

Collection

Design+

EAN code

8034122348544



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Scotch brite stainless steel (AISI 304)
White tempered glass
Perimeter suction
Touch control + 24 h function
LED lighting
Top filter, removable and washable
Optional combined regenerable Carbon.Zeo filter
Optional remote control

Panoramic hobs are recommended with this hood.

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

TECHNICAL FEATURES

Installation type
Worktop
Dimensions
120 cm
Finishing
Scotch brite stainless steel (AISI 304)
White tempered glass
Type of control
Touch control
Speed settings
4
Lighting
Led stripe
Filter
2 x Metallic filter "Top" - 404x216 mm
Charcoal filter
Kit filters Carbon.Zeo (optional)

PACKAGING:WEIGHTS AND VOLUMES

DOWN DRAFT Gross weight

52.6 kg

Net weight

43.2 kg

Volumes

0.43 m³

Packaging size

Length

1395 mm

Height

355 mm

Depth

865 mm

REMOTE MOTOR Slim motor

800 m³/h **Gross weight**

10.3 kg

Net weight

9 kg

Volumes

0.07 m³

Packaging size

Length

515 mm

Height

440 mm

Depth

320 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

30 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

620 m³/h

I.E.C. 61591

Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

400 Pa

Max. motor power

270 W

ENERGY CLASS

C

DOWN DRAFT

Version

Slim motor 800 m³/h

Collection

Design+


EAN code

8034122348544

MOTOR TECHNICAL SHEET

| Motor speed | 1 | 2 | 3 | 4 |
|--|--------|--------|--------|--------|
| Noise level dB(A)re1pW- I.E.C.60704-2-13 | 52 | 57 | 64 | 67 |
| Capacity (m ³ /h) I.E.C.61591 | 325 | 330 | 550 | 620 |
| Maximum pressure (Pa) | 450 | 500 | 400 | 400 |
| Motor Power (W) | 200 | 230 | 240 | 270 |
| Air outlet | 220x90 | 220x90 | 220x90 | 220x90 |

CAPACITY / PRESSURE

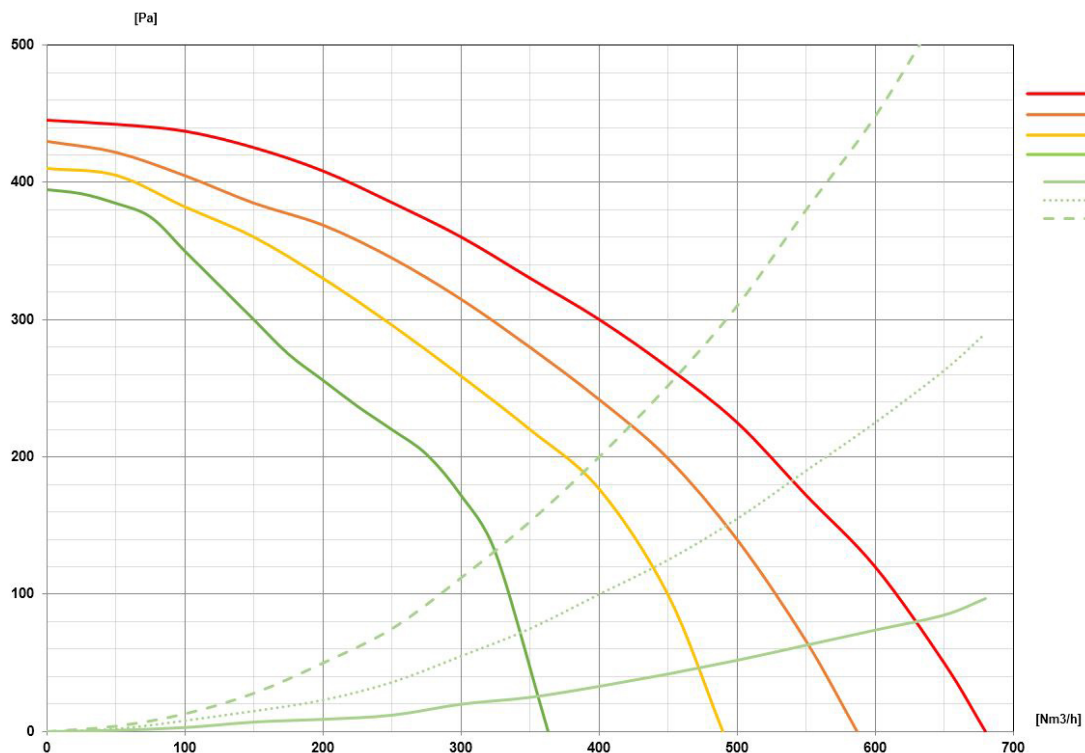

DOWN DRAFT

Version

Slim motor 800 m³/h


Collection

Design+

EAN code

8034122348544

ENERGY LABEL

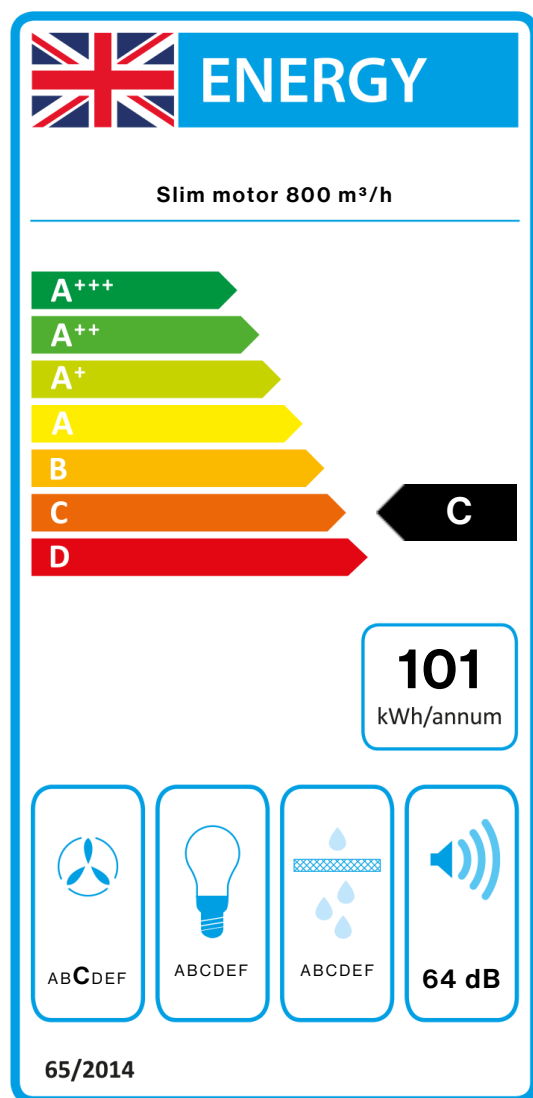

| PF | | |
|------------|----------------------------------|-------------------|
| S | Falmec Spa | |
| M | Slim motor 800 m ³ /h | |
| AEC | 100,6 | kWh/a |
| EEC | C | |
| FDE | 19,3 | |
| FDEC | C | |
| LE | 2,4 | |
| LEC | G | |
| GFE | 36,0 | |
| GFEC | G | |
| Qmin | 325,0 | m ³ /h |
| Qmax | 550,0 | m ³ /h |
| Qboost | 620,0 | m ³ /h |
| SPEmin | 52 | dBa |
| SPEmax | 64 | dBa |
| SPEboost | 67 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1.3 | |
| EEL | 81,0 | |
| Qbep | 440,0 | m ³ /h |
| Pbep | 271 | Pa |
| Qboost | 620,0 | m ³ /h |
| Wbep | 172,0 | W |
| WL | 26,00 | W |
| Emiddle | 63 | lux |
| Lwa-SPEmax | 64 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.