

DOWN DRAFT

Versiune

Motor Slim 800 m³/h

Colectie

Design+

Cod EAN

8034122348544



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox AISI 304 Scotch Brite
Sticla tratata termic culoare alba
Aspiratie perimetrala
Touch control + functia 24 h
Iluminare cu LED
Filtru de grasime Top, detasabil si lavabil
Optional - filtru combinat Carbon.Zeo, regenerabil
Optional - telecomanda

ACCESORII OPTIONALE

KACL.815
Lavete pentru curatare inox (cutie 10 buc)
KACL.930
Filtru Carbon.Zeo Mic
105080053
Telecomanda

CARACTERISTICI TEHNICE

Tip de instalare
De blat
Dimensiuni
120 cm
Finisaj
Inox Scotch Brite (AISI 304)
Sticla tratata termic culoare alba
Tipul panoului de control
Touch control
Setari de viteza
4
Iluminare
Banda cu LED
Filtru
2 x Filtru metalic "Top" - 404x216 mm
Filtru de Carbon
Filtru Carbon.Zeo Mic (optional)

AMBALARE: GREUTATE SI VOLUM

DOWN DRAFT Greutate bruta

52.6 kg

Greutate neta

43.2 kg

Volum

0.43 m³

Dimensiuni ambalaj

Lungime

1395 mm

Inaltime

355 mm

Adancime

865 mm

TELECOMANDA Motor Slim

800 m³/h **Greutate bruta**

10.3 kg

Greutate neta

9 kg

Volum

0.07 m³

Dimensiuni ambalaj

Lungime

515 mm

Inaltime

440 mm

Adancime

320 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

30 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

620 m³/h

I.E.C. 61591

Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)

400 Pa

Putere maxima motor

270 W

CLASA DE ENERGIE

C

DOWN DRAFT

Versiune

Motor Slim 800 m³/h

Colectie

Design+


Cod EAN

8034122348544

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW- I.E.C.60704-2-13	52	57	64	67
Capacitate (m ³ /h) I.E.C.61591	325	330	550	620
Presiune maxima (Pa)	450	500	400	400
Putere motor (W)	200	230	240	270
Evacuare aer	220x90	220x90	220x90	220x90

CAPACITATE/ PRESIUNE

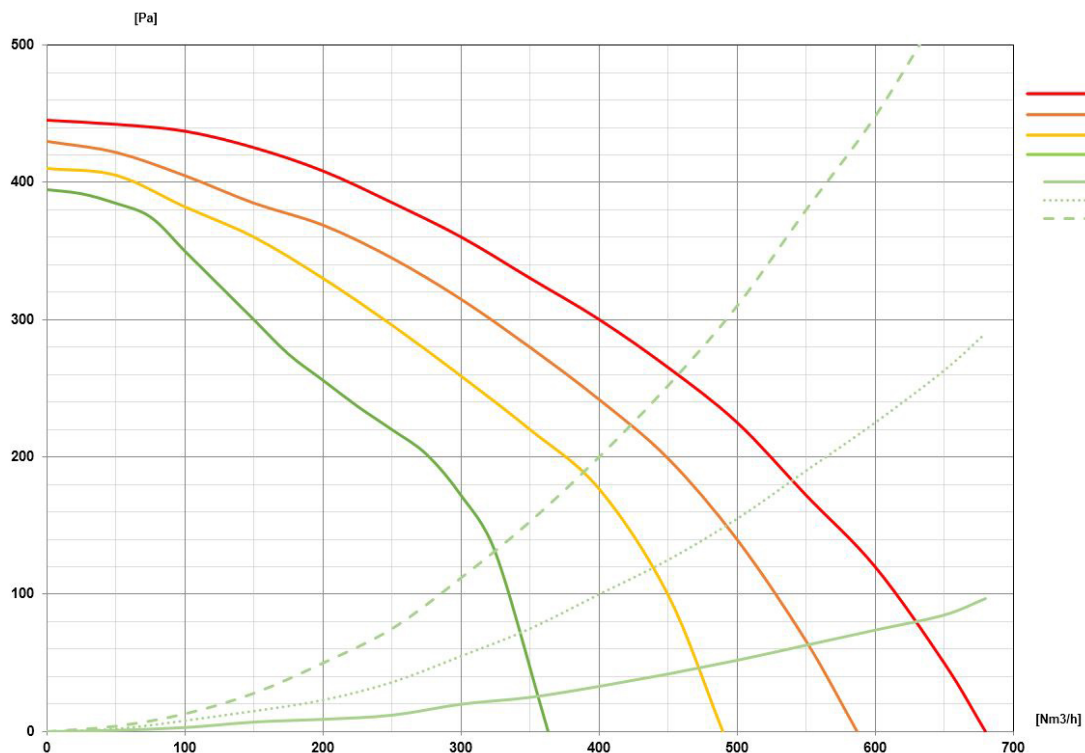

DOWN DRAFT

Versiune

Motor Slim 800 m³/h


Colectie

Design+

Cod EAN

8034122348544

ETICHETA DE ENERGIE

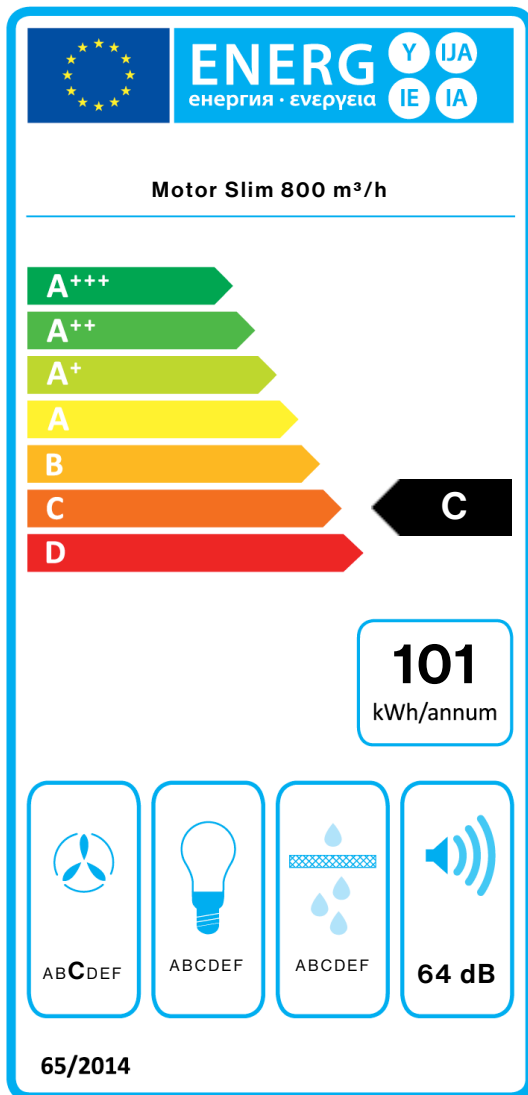

PF		
S	Falmec Spa	
M	Motor Slim 800 m ³ /h	
AEC	100,6	kWh/a
EEC	C	
FDE	19,3	
FDEC	C	
LE	2,4	
LEC	G	
GFE	36,0	
GFEC	G	
Qmin	325,0	m ³ /h
Qmax	550,0	m ³ /h
Qboost	620,0	m ³ /h
SPEmin	52	dBa
SPEmax	64	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.3	
EEl	81,0	
Qbep	440,0	m ³ /h
Pbep	271	Pa
Qboost	620,0	m ³ /h
Wbep	172,0	W
WL	26,00	W
Emiddle	63	lex
Lwa-SPEmax	64	dBa