

LUX

Versiune

Perete 120 cm - 800 m3/h

Colectie

Fasteel

Cod EAN

8034122201450



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox FASTEEL (anti-amprente)
Scotch Brite
Sticla transparenta tratata termic gravata
Aspiratie perimetrala
Control electronic
Illuminare cu neon
Filtru de grasime metalic, detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.490#X

Extensie H700 - Perete Fasteel

KACL.492#X

Extensie H960 - Perete Fasteel

KACL.770#41F

Motor de acoperis 1100 m3/h
Brushless

KACL.786#41F

Motor de exterior 1000 m3/h

KACL.796#4AF

Motor de exterior 1500 m3/h

KACL.797#4AF

Motor de acoperis 1300 m3/h

KACL.798#41F

Motor de acoperis 950 m3/h

CARACTERISTICI TEHNICE

Tip de instalare
De perete
Dimensiuni
120 cm
Finisaj
Sticla transparenta tratata termic gravata
Inox FASTEEL (anti-amprente)
Scotch brite
Motor
800 m³/h
Tipul panoului de control
Control electronic
Setari de viteza
4
Illuminare
Neon 2x13 W
Filtru
2 x Filtru metalic "Base" - 235x245 mm (Alb)
Filtru de Carbon
Filtru de carbon rectangular - Tip 3 (inclus)
Distanta minima
Plita cu gaz: 65 cm
Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM


Greutate bruta
41 kg
Greutate neta
34 kg
Volum
0.37 m³
Dimensiuni ambalaj
Lungime
1310 mm
Inaltime
480 mm
Adancime
595 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
320 W
Curent
220-240V
Frecventa
50-60Hz
Tip stecher
Shuko

FISA TEHNICA MOTOR

Capacitate maxima
670 m³/h
I.E.C. 61591
Nivel de zgomot maxim
67 dB(A)re1pW
I.E.C.60704-2-13
Presiune maxima (Pa)
500 Pa
Putere maxima motor
215 W
CLASA DE ENERGIE
C



LUX

Versiune

Perete 120 cm - 800 m³/h

Colectie

Fasteel

Cod EAN

8034122201450

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A) _{re1pW-I.E.C.60704-2-13}	49	55	61	67
Capacitate (m ³ /h) I.E.C.61591	270	360	470	670
Presiune maxima (Pa)	390	420	460	500
Putere motor (W)	134	156	180	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE



LUX

Versiune

Perete 120 cm - 800 m³/h


Colectie

Fasteel

Cod EAN

8034122201450

ETICHETA DE ENERGIE

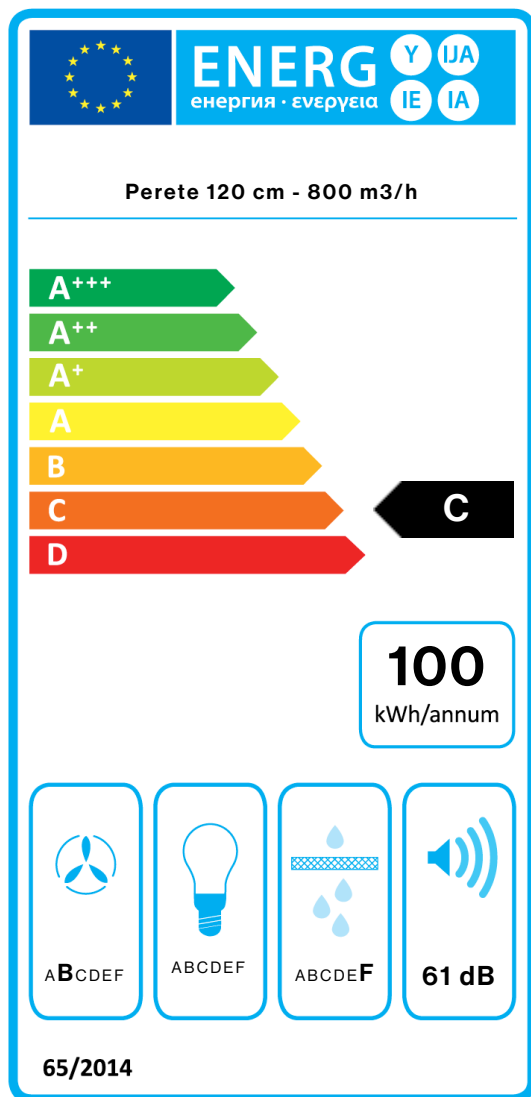

PF		
S	Falmec Spa	
M	Perete 120 cm - 800 m ³ /h	
AEC	100,2	kWh/a
EEC	C	
FDE	25,5	
FDEC	B	
LE	2,8	
LEC	G	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEl	78,7	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	56,00	W
Emiddle	155	lex
Lwa-SPEmax	61	dBa