falmec

ZENITH NRS

Sortiment
Silence - NRS

EAN Kode
8034122354866

Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Rustfrit stål (AISI 304) scotch brite
NRS teknologi for et roligere køkken
Elektronisk kontrolpanel
Vaskbare rustfrie fedtfiltre
Tilvalg fjernbetjening
Central stribe lavet i blankpudset stål
Hylde i tempereret glas
Diffus belysning
Mulighed for Connection kogeplade
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024

MULIGHEDER FOR TILVALG

01-FJERN
Fjernbetjening med display
07MAGIC
Beskyttende renseklude til rustfrit stål. Kasse med 10 klude
101078898
High Performance Filter (spare part)
KACL.1039
Carbon.Zeo Microtech filter
KACL.129
Glass kit 180 cm
KACL.400
Silent / Conveyor NRS



TEKNISK BESKRIVELSE

Installation
Frithængt
Dimensioner
90 cm
Materiale
Scotch brite rustfrit stål (AISI 304)
Tempereret glas
Motor
800 m³/h
Betjening
Elektronisk kontrolpanel
Hastighed
3 + boost
Belysning
LED (5500K)
Filter
Metallfiltre - Zenith Island
Kulfilter
Carbon.Zeo Microtech filter (Tilvalg)
Minimumsafstand
Gaskomfur: 60 cm
Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

ZENITH NRS Bruttovægt
38 kg
Nettovægt
32 kg
Volumen
0.42 m³
Mål på emballage
Længde
1070 mm
Højde
450 mm
Dybde
870 mm
SÆT GLAS Glass kit 90 cm
Bruttovægt
27 kg
Nettovægt
18 kg
Volumen
0.12 m³
Mål på emballage
Længde
970 mm
Højde
180 mm
Dybde
670 mm

FORBRUG OG TILSLUTNINGSMULIGHER

Spænding
220-240V
Frekvens
50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet
610 m³/h
I.E.C. 61591
Maksimalt støjniveau
54,5 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
510 Pa
Maksimal sugestyrke
224 W
ENERGIKLASSE
C

falmec

ZENITH NRS

Sortiment
Silence - NRS

EAN Kode
8034122354866

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Kapacitet (m3/h) I.E.C.61591	220	290	375	610
Maksimalt tryk (Pa)	390	440	490	510
Forbrug (W)	130	150	178	224
Luftudtag	150	150	150	150

KAPACITET / TRYK

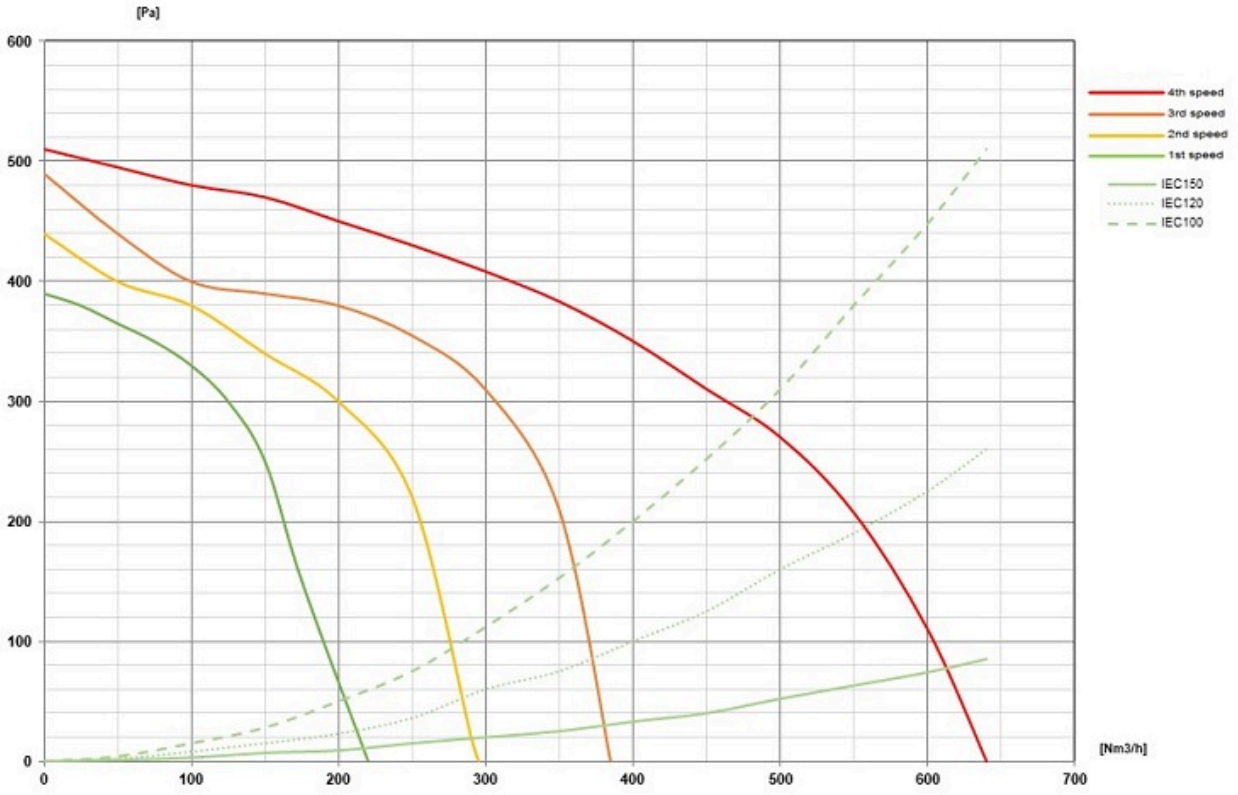

falmec

ZENITH NRS

Sortiment
Silence - NRS

EAN Kode
8034122354866

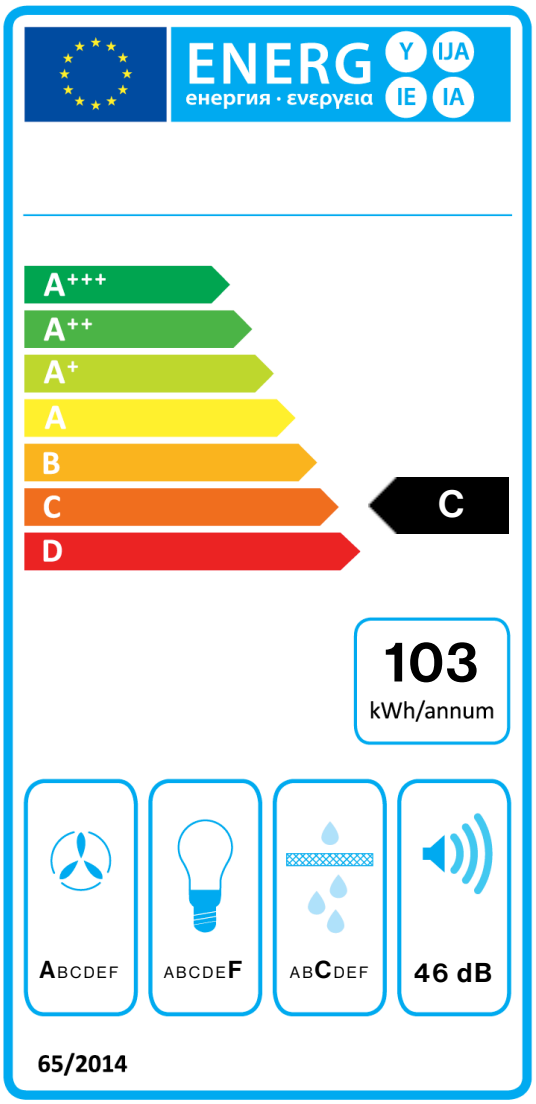

PF		
S	Falmec Spa	
M		
AEC	103,3	kWh/a
EEC	C	
FDE	28,9	
FDEC	A	
LE	6,8	
LEC	F	
GFE	76,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	375,0	m³/h
Qboost	610,0	m³/h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	80,0	
Qbep	369,0	m³/h
Pbep	369	Pa
Qboost	610,0	m³/h
Wbep	131,0	W
WL	76,00	W
Emiddle	519	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.