

ZENITH NRS

Version

Collection

Silence - NRS

EAN code

8034122354873

FEATURES

- NRS technology for a quieter kitchen
- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Combined Carbon.Zeo filter, regenable
- Optional remote control
- Central stripe made in brilliant steel
- Tempered glass shelf
- Diffuse illumination

OPTIONAL ACCESSORIES

- KACL.400**
Silent / Conveyor NRS
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.961**
Charcoal and Zeolite filter
- 101078898**
High Performance Filter
- 105080053**
Remote control

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
120 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Tempered glass
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Filter**
Metallic filter - Zenith Island
- Charcoal filter**
Charcoal and Zeolite filter (optional)
- Minimum distance**
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- ZENITH NRS Gross weight**
31 kg
- Net weight**
25 kg
- Volumes**
0.42 m³
- Packaging size**
Length
1070 mm
Height
450 mm
Depth
870 mm
- GLASS KIT 120 cm Gross weight**
32.5 kg
- Net weight**
21 kg
- Volumes**
0.13 m³
- Packaging size**
Length
1270 mm
Height
180 mm
Depth
565 mm

CONSUMPTION AND CONNECTION FEATURES

- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
610 m³/h
I.E.C. 61591
- Maximum noise level**
54,5 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
510 Pa
- Max. motor power**
224 W
- ENERGY CLASS**
C



ZENITH NRS

Version

Collection

Silence - NRS


EAN code

8034122354873

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacity (m3/h) I.E.C.61591	220	290	375	610
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

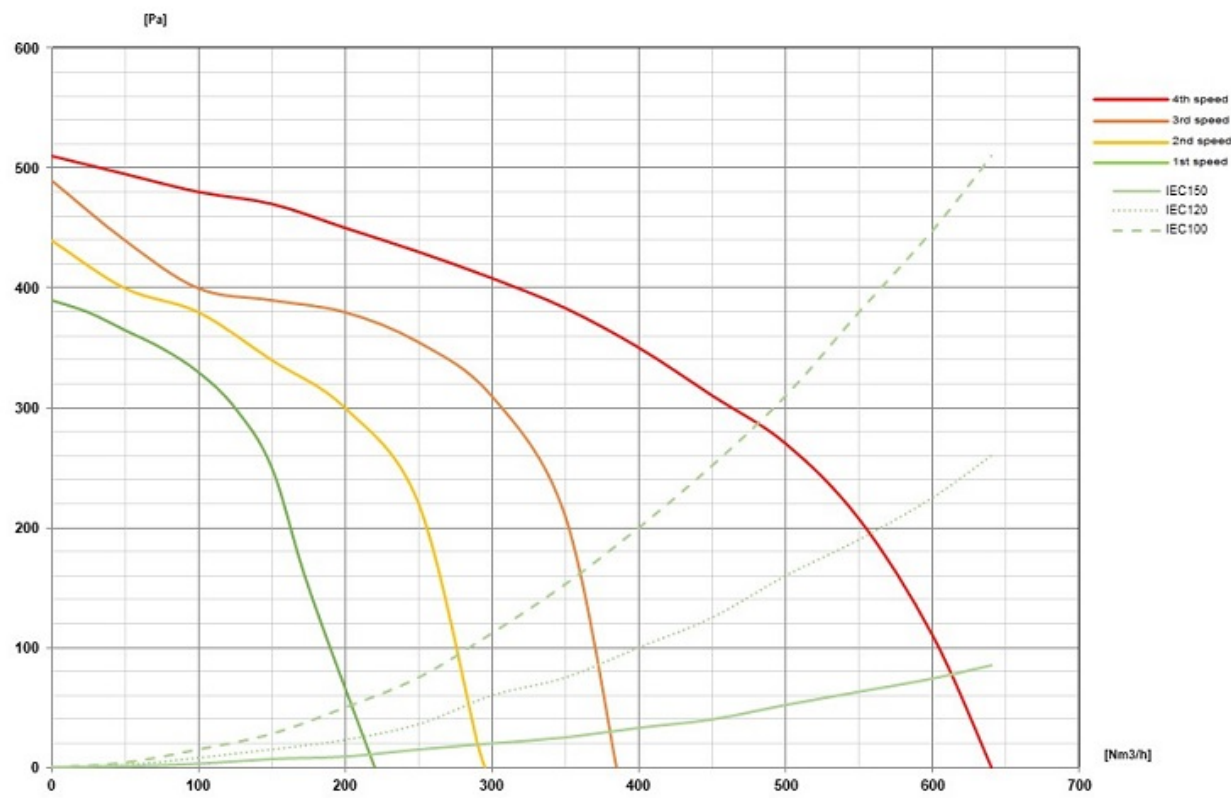

ZENITH NRS

Version


Collection

Silence - NRS

EAN code

8034122354873

ENERGY LABEL

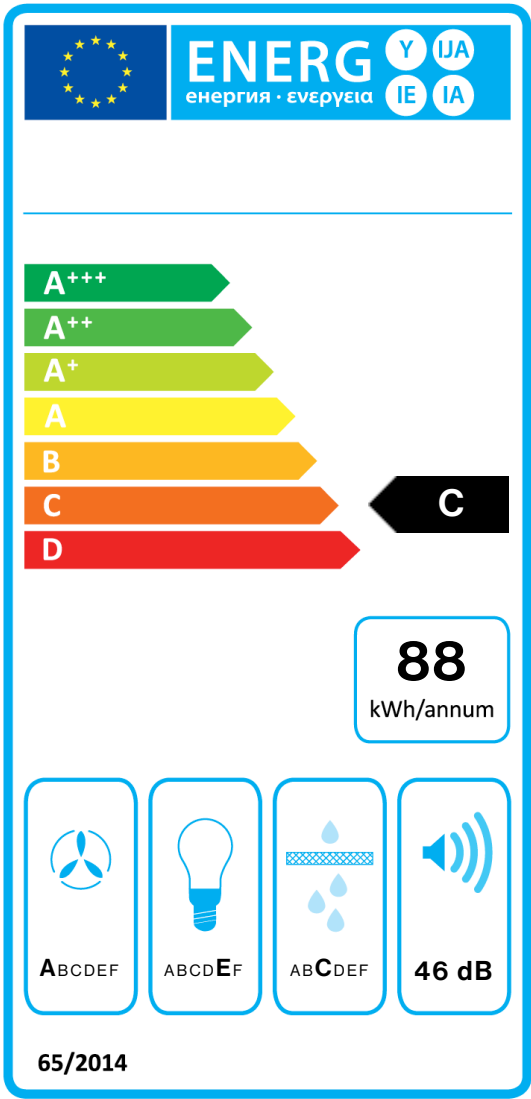

PF		
S	Falmec Spa	
M		
AEC	88,0	kWh/a
EEC	C	
FDE	28,9	
FDEC	A	
LE	9,7	
LEC	E	
GFE	76,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	375,0	m³/h
Qboost	610,0	m³/h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	74,8	
Qbep	369,0	m³/h
Pbep	369	Pa
Qboost	610,0	m³/h
Wbep	131,0	W
WL	55,00	W
Emiddle	532	lex
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.