

LUX

Versiune

Perete 90 cm - 800 m³/h

Colectie

Fasteel

Cod EAN

8034122201665



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox FASTEEL (anti-amprente)
Scotch Brite
Sticla transparenta tratata termic gravata
Aspiratie perimetrala
Control electronic
Illuminare cu neon
Filtru de grasime metalic, detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.490#X

Extensie H700 - Perete Fasteel

KACL.492#X

Extensie H960 - Perete Fasteel

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

CARACTERISTICI TEHNICE

Tip de instalare
De perete
Dimensiuni
90 cm
Finisaj
Sticla transparenta tratata termic gravata
Inox FASTEEL (anti-amprente)
Scotch brite
Motor
800 m³/h
Tipul panoului de control
Control electronic
Setari de viteza
4
Illuminare
Neon 2x21 W
Filtru
2 x Filtru metalic "Base" - 235x245 mm (Alb)
Filtru de Carbon
Filtru de carbon rectangular - Tip 3 (inclus)
Distanta minima
Plita cu gaz: 65 cm
Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM


Greutate bruta
34 kg
Greutate neta
29 kg
Volum
0.28 m³
Dimensiuni ambalaj
Lungime
995 mm
Inaltime
480 mm
Adancime
595 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
320 W
Curent
220-240V
Frecventa
50-60Hz
Tip stecher
Shuko

FISA TEHNICA MOTOR

Capacitate maxima
670 m³/h
I.E.C. 61591
Nivel de zgomot maxim
67 dB(A)re1pW
I.E.C.60704-2-13
Presiune maxima (Pa)
500 Pa
Putere maxima motor
215 W
CLASA DE ENERGIE
C



LUX

Versiune

Perete 90 cm - 800 m³/h

Colectie

Fasteel

Cod EAN

8034122201665

FISA TEHNICA MOTOR

| Viteza motorului | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13 | 49 | 55 | 61 | 67 |
| Capacitate (m ³ /h) I.E.C.61591 | 270 | 360 | 470 | 670 |
| Presiune maxima (Pa) | 390 | 420 | 460 | 500 |
| Putere motor (W) | 134 | 156 | 180 | 215 |
| Evacuare aer | 150 | 150 | 150 | 150 |

CAPACITATE/ PRESIUNE



LUX

Versiune

Perete 90 cm - 800 m3/h


Colectie

Fasteel

Cod EAN

8034122201665

ETICHETA DE ENERGIE

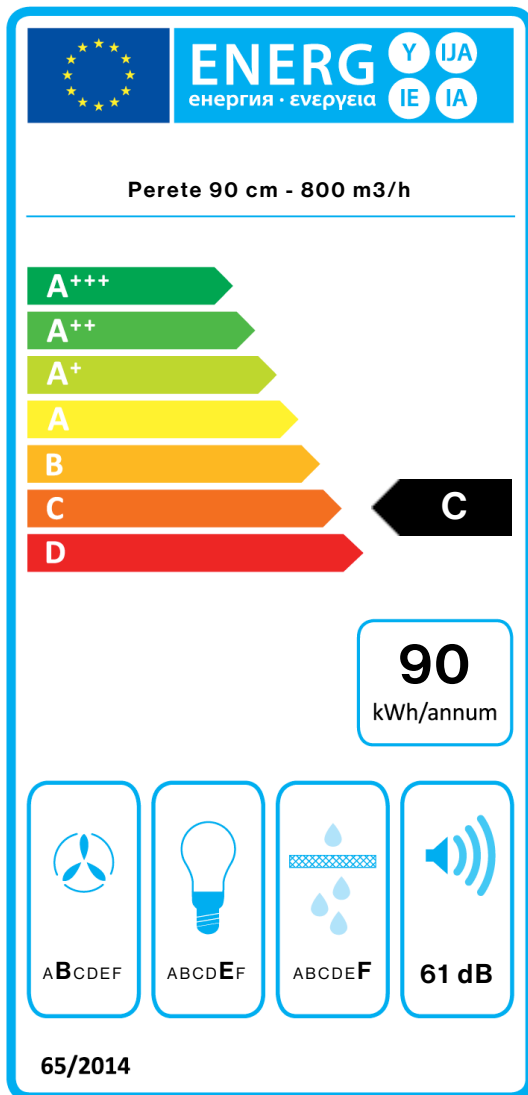

| PF | | |
|------------|-------------------------|-------------------|
| S | Falmec Spa | |
| M | Perete 90 cm - 800 m3/h | |
| AEC | 90,0 | kWh/a |
| EEC | C | |
| FDE | 25,5 | |
| FDEC | B | |
| LE | 8,4 | |
| LEC | E | |
| GFE | 53,0 | |
| GFEC | F | |
| Qmin | 270,0 | m ³ /h |
| Qmax | 470,0 | m ³ /h |
| Qboost | 670,0 | m ³ /h |
| SPEmin | 49 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 67 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1.1 | |
| EEI | 75,3 | |
| Qbep | 333,0 | m ³ /h |
| Pbep | 407 | Pa |
| Qboost | 670,0 | m ³ /h |
| Wbep | 147,7 | W |
| WL | 42,00 | W |
| Emiddle | 352 | lex |
| Lwa-SPEmax | 61 | dBa |