

LUX

Version
Island 120 cm - 800 m3/h

Collection
Fasteel

EAN code
8034122201115



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Scotch brite Fasteel no finger prints
- Etched tempered extra light glass
- Perimeter suction
- Electronic control
- Neon lighting
- Metallic grease filter, removable and washable
- Charcoal filter included

OPTIONAL ACCESSORIES

- KACL.558#X**
Extension H1200 - Island Fasteel
- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h

TECHNICAL FEATURES

- Installation type**
Island
- Dimensions**
120 cm
- Finishing**
Etched tempered extra light glass
- Scotch brite Fasteel no finger prints
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Neon 2x13 W
- Filter**
2 x Metallic filter "Base" - 235x245 mm (White)
- Charcoal filter**
Square charcoal filter - Type 3 (included)
- Minimum distance**
Gas hob: 65 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
54 kg
- Net weight**
46 kg
- Volumes**
0.47 m³
- Packaging size**
Length
1330 mm
Height
490 mm
Depth
725 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
320 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
670 m³/h
I.E.C. 61591
- Maximum noise level**
67 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
500 Pa
- Max. motor power**
215 W
- ENERGY CLASS**
C



LUX

Version
Island 120 cm - 800 m3/h


Collection
Fasteel

EAN code
8034122201115

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

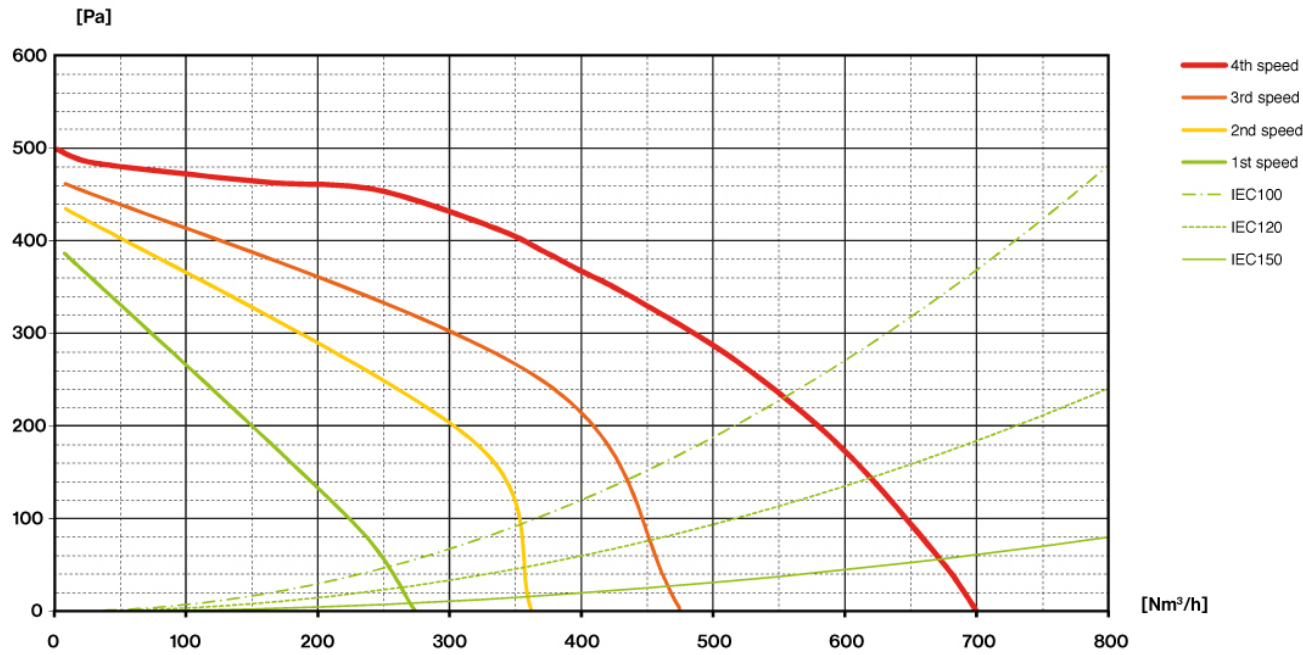


LUX

Version
Island 120 cm - 800 m3/h

Collection
Fasteel

EAN code
8034122201115

ENERGY LABEL

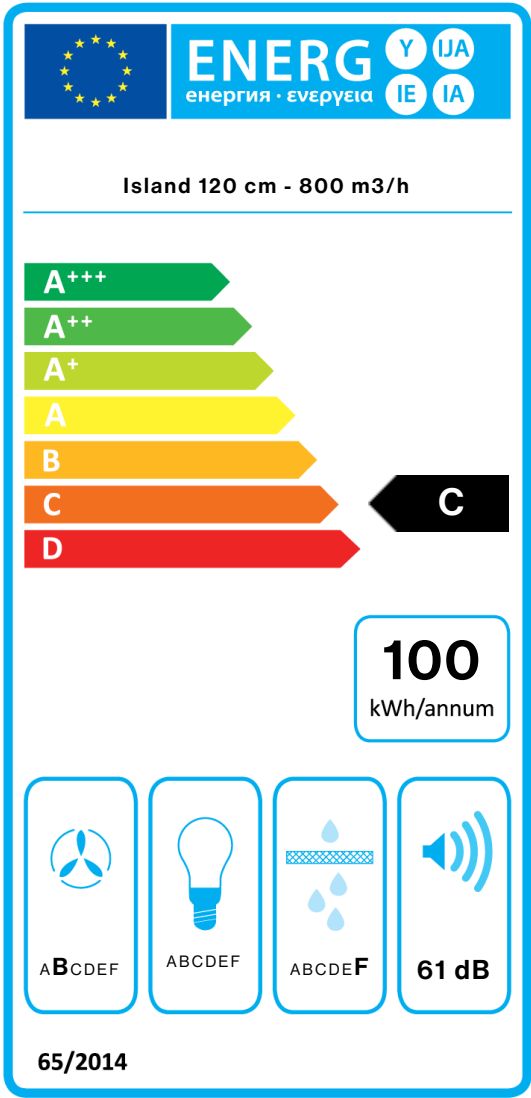

PF		
S	Falmec Spa	
M	Island 120 cm - 800 m3/h	
AEC	100,2	kWh/a
EEC	C	
FDE	25,5	
FDEC	B	
LE	2,8	
LEC	G	
GFE	53,0	
GFEC	F	
Qmin	270,0	m³/h
Qmax	470,0	m³/h
Qboost	670,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,95	W
PI		
F	1,1	
EEL	78,7	
Qbep	333,0	m³/h
Pbep	407	Pa
Qboost	670,0	m³/h
Wbep	147,7	W
WL	56,00	W
Emiddle	155	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.