

LUX

Versiune

Insula 120 cm - 800 m³/h

Colectie

Fasteel

Cod EAN

8034122201115



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Inox FASTEEL (anti-amprente)
Scotch Brite
Sticla transparenta tratata termic gravata
Aspiratie perimetrala
Control electronic
Iluminare cu neon
Filtru de grasime metalic, detasabil si lavabil
Filtru de carbon inclus

ACCESORII OPTIONALE

KACL.558#X

Extensie H1200 - Insula Fasteel

KACL.770#41F

Motor de acoperis 1100 m³/h

Brushless

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

CARACTERISTICI TEHNICE

Tip de instalare

Insula

Dimensiuni

120 cm

Finisaj

Sticla transparenta tratata termic gravata

Inox FASTEEL (anti-amprente)

Scotch brite

Motor

800 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

Neon 2x13 W

Filtru

2 x Filtru metalic "Base" - 235x245 mm (Alb)

Filtru de Carbon

Filtru de carbon rectangular - Tip 3 (inclus)

Distanta minima

Plita cu gaz: 65 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

54 kg

Greutate neta

46 kg

Volum

0.47 m³

Dimensiuni ambalaj

Lungime

1330 mm

Inaltime

490 mm

Adancime

725 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

320 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

670 m³/h

I.E.C. 61591

Nivel de zgomot maxim

67 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor

215 W

CLASA DE ENERGIE

C



LUX

Versiune

Insula 120 cm - 800 m³/h

Colectie

Fasteel

Cod EAN

8034122201115

FISA TEHNICA MOTOR

| Viteza motorului | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13 | 49 | 55 | 61 | 67 |
| Capacitate (m ³ /h) I.E.C.61591 | 270 | 360 | 470 | 670 |
| Presiune maxima (Pa) | 390 | 420 | 460 | 500 |
| Putere motor (W) | 134 | 156 | 180 | 215 |
| Evacuare aer | 150 | 150 | 150 | 150 |

CAPACITATE/ PRESIUNE



LUX

Versiune

Insula 120 cm - 800 m3/h


Colectie

Fasteel

Cod EAN

8034122201115

ETICHETA DE ENERGIE

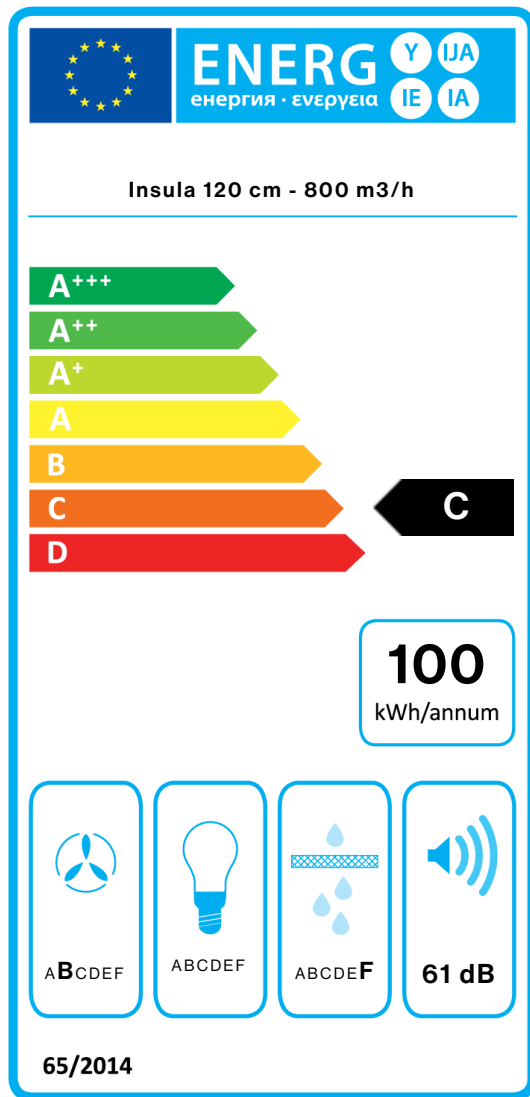

| PF | | |
|------------|--------------------------|-------------------|
| S | Falmec Spa | |
| M | Insula 120 cm - 800 m3/h | |
| AEC | 100,2 | kWh/a |
| EEC | C | |
| FDE | 25,5 | |
| FDEC | B | |
| LE | 2,8 | |
| LEC | G | |
| GFE | 53,0 | |
| GFEC | F | |
| Qmin | 270,0 | m ³ /h |
| Qmax | 470,0 | m ³ /h |
| Qboost | 670,0 | m ³ /h |
| SPEmin | 49 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 67 | dBa |
| PO | - | W |
| PS | 0,95 | W |
| PI | | |
| F | 1,1 | |
| EEl | 78,7 | |
| Qbep | 333,0 | m ³ /h |
| Pbep | 407 | Pa |
| Qboost | 670,0 | m ³ /h |
| Wbep | 147,7 | W |
| WL | 56,00 | W |
| Emiddle | 155 | lex |
| Lwa-SPEmax | 61 | dBa |