

DOWN DRAFT

Version
Slim motor 800 m³/h

Collection
Design+

EAN code
8034122348551



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Perimeter suction
- Touch control + 24 h function
- LED lighting
- Top filter, removable and washable
- Optional combined regenerable Carbon.Zeo filter
- Optional remote control

Panoramic hobs are recommended with this hood.

OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.784#46F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.930**
Kit filters Carbon.Zeo
- KACL.951**
Underbase Slim filter unit (h60mm)
- 105080053**
Remote control

TECHNICAL FEATURES

- Installation type**
Worktop
- Dimensions**
120 cm cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Black tempered glass
- Type of control**
Touch control
- Speed settings**
4
- Lighting**
Led stripe
- Filter**
2 x Metallic filter "Top" - 404x216 mm
- Charcoal filter**
Kit filters Carbon.Zeo (optional)

PACKAGING:WEIGHTS AND VOLUMES





- DOWN DRAFT Gross weight**
52.6 kg
- Net weight**
43.2 kg
- Volumes**
0.43 m³
- Packaging size**
Length
1395 mm
Height
355 mm
Depth
865 mm
- REMOTE MOTOR Slim motor 800 m³/h Gross weight**
10.3 kg
- Net weight**
9 kg
- Volumes**
0.07 m³
- Packaging size**
Length
515 mm
Height
440 mm
Depth
320 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
30 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
620 m³/h
I.E.C. 61591
- Maximum noise level**
67 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
400 Pa
- Max. motor power**
270 W
- ENERGY CLASS**
C



DOWN DRAFT

Version
Slim motor 800 m³/h


Collection
Design+

EAN code
8034122348551

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	57	64	67
Capacity (m3/h) I.E.C.61591	325	330	550	620
Maximum pressure (Pa)	450	500	400	400
Motor Power (W)	200	230	240	270
Air outlet	220x90	220x90	220x90	220x90

CAPACITY / PRESSURE

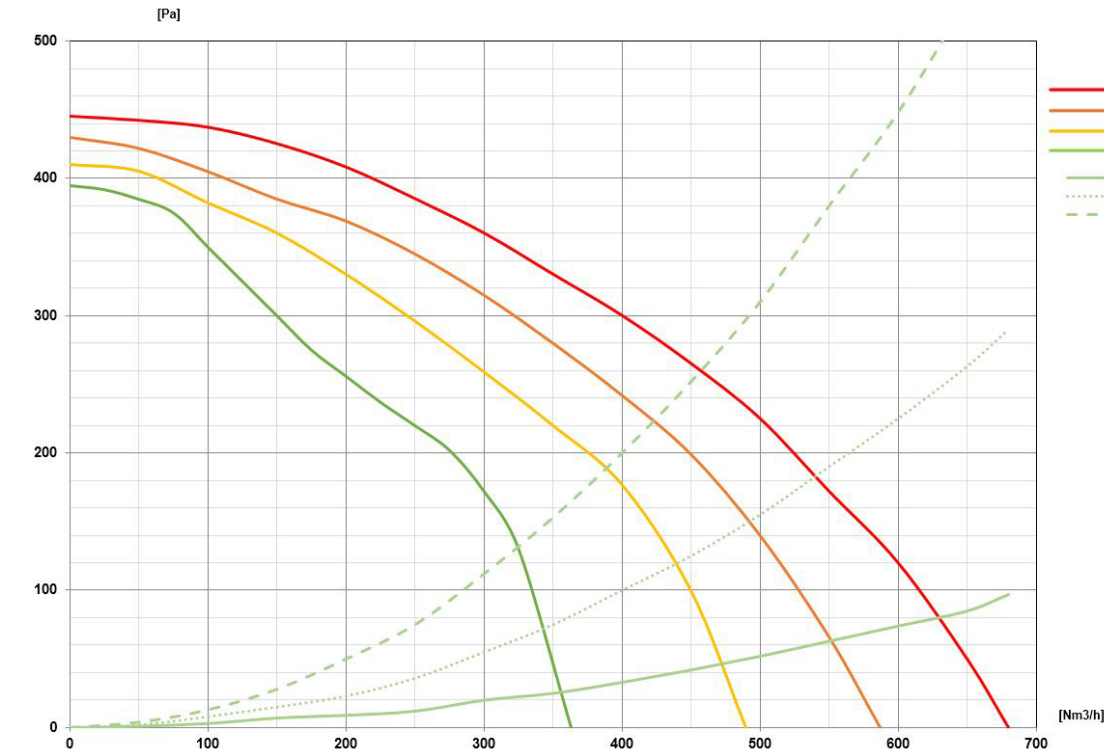


DOWN DRAFT

Version
Slim motor 800 m³/h

Collection
Design+

EAN code
8034122348551

ENERGY LABEL

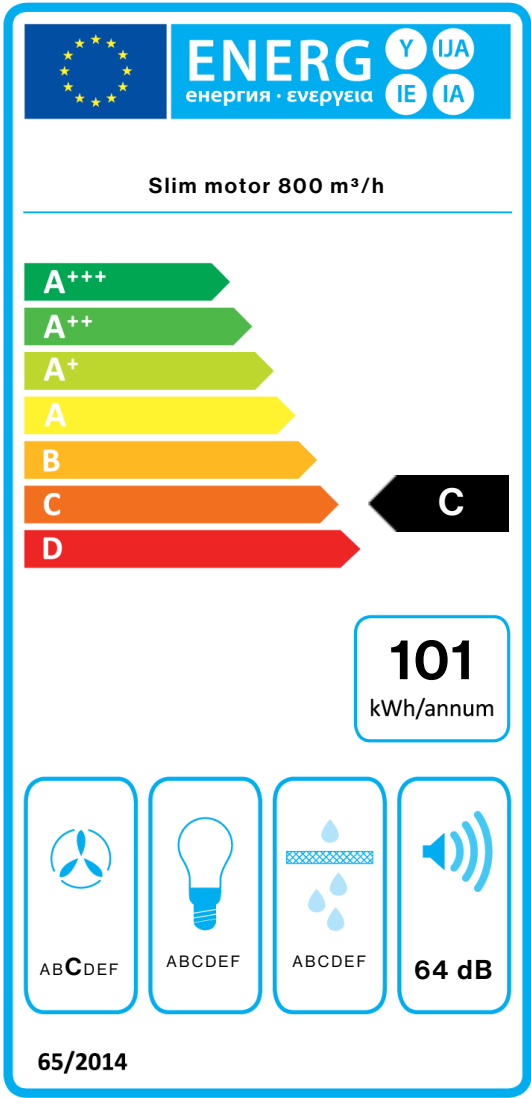

PF		
S	Falmec Spa	
M	Slim motor 800 m³/h	
AEC	100,6	kWh/a
EEC	C	
FDE	19,3	
FDEC	C	
LE	2,4	
LEC	G	
GFE	36,0	
GFEC	G	
Qmin	325,0	m³/h
Qmax	550,0	m³/h
Qboost	620,0	m³/h
SPEmin	52	dBa
SPEmax	64	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.3	
EEL	81,0	
Qbep	440,0	m³/h
Pbep	271	Pa
Qboost	620,0	m³/h
Wbep	172,0	W
WL	26,00	W
Emiddle	63	lex
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.