

DOWN DRAFT

Version

Remote under-roof motor 950 m³/h

Collection

Design+

EAN code

8034122348551



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Perimeter suction

Touch control + 24 h function

LED lighting

Optional combined regenaleble

Carbon.Zeo filter

Optional remote control

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.930

Kit filters Carbon.Zeo

105080053

Remote control

TECHNICAL FEATURES

Installation type

Worktop

Dimensions

120 cm cm

Finishing

Scotch brite stainless steel (AISI 304)

Black tempered glass

Type of control

Touch control

Speed settings

4

Lighting

Led stripe

Filter

2 x Metallic filter "Top" - 404x216 mm

Charcoal filter

Kit filters Carbon.Zeo (optional)

PACKAGING:WEIGHTS AND VOLUMES

DOWN DRAFT Gross weight

52.6 kg

Net weight

43.2 kg

Volumes

0.43 m³

Packaging size

Length

1395 mm

Height

355 mm

Depth

865 mm

REMOTE MOTOR Remote

under-roof motor 950 m³/h

Gross weight

10 kg

Net weight

9 kg

Volumes

0.06 m³

Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

30 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

730 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

580 Pa

Max. motor power

240 W

ENERGY CLASS

B

DOWN DRAFT

Version

Remote under-roof motor 950
m³/h

Collection

Design+


EAN code

8034122348551

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) _{re1pW-I.E.C.60704-2-13}	51	59	64	68
Capacity (m ³ /h) I.E.C.61591	330	480	610	730
Maximum pressure (Pa)	460	520	560	580
Motor Power (W)	187	210	225	240
Air outlet	150	150	150	150

CAPACITY / PRESSURE

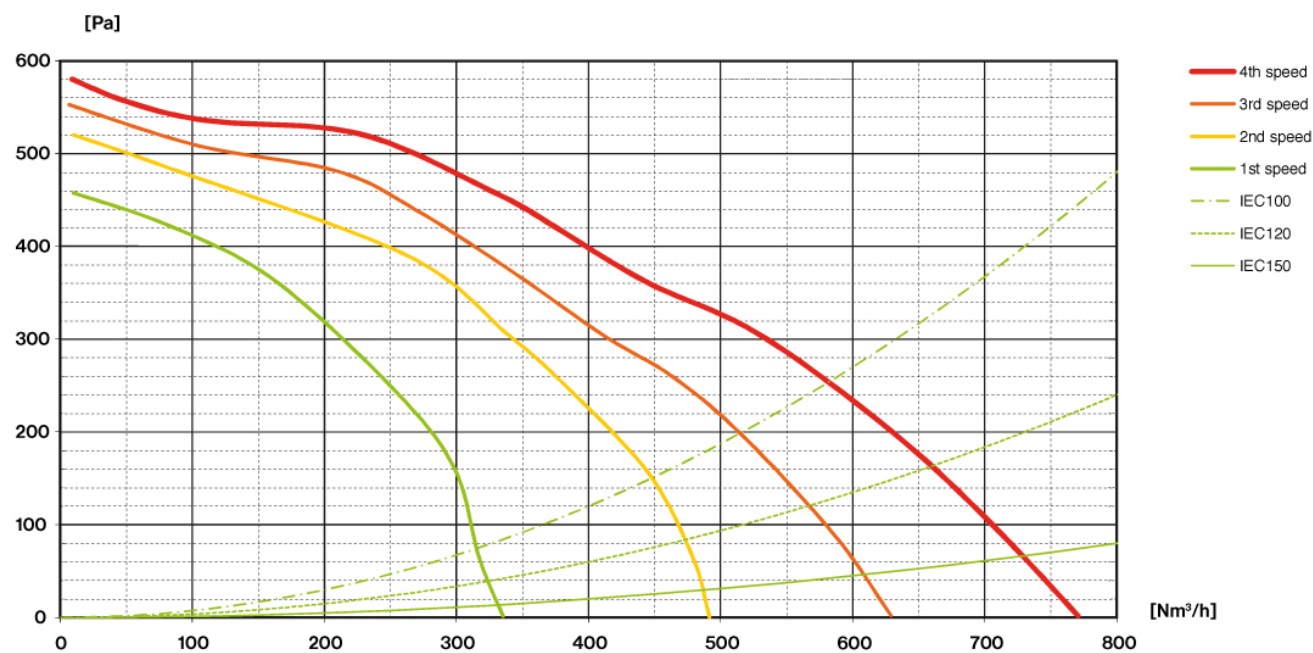

DOWN DRAFT

Version

Remote under-roof motor 950
m³/h


Collection

Design+

EAN code

8034122348551

ENERGY LABEL

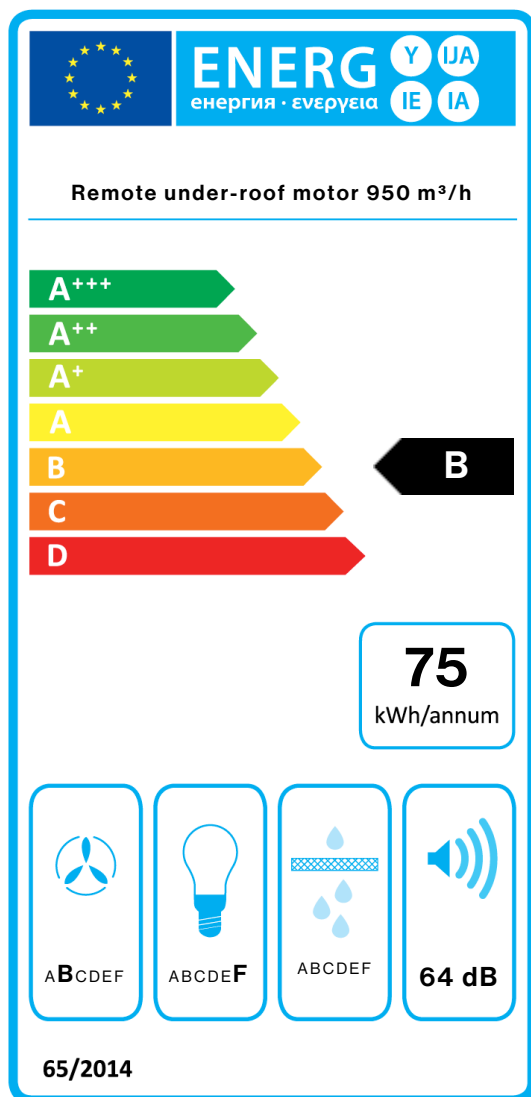

PF		
S	Falmec Spa	
M	Remote under-roof motor 950 m ³ /h	
AEC	75,4	kWh/a
EEC	B	
FDE	24,6	
FDEC	B	
LE	6,5	
LEC	F	
GFE	36,0	
GFEC	G	
Qmin	330,0	m ³ /h
Qmax	610,0	m ³ /h
Qboost	730,0	m ³ /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,95	W
PI		
F	1.1	
EEl	65,2	
Qbep	369,0	m ³ /h
Pbep	422	Pa
Qboost	730,0	m ³ /h
Wbep	176,0	W
WL	6,50	W
Emiddle	42	lex
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.