

NUBE

Slimlinemotor 800 m3

Sortiment

Design+

EAN Kode

8034122355405



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Kantsug
Elektronisk kontrolpanel
Vaskbare rustfrie fedtfiltere
Fjernbetjening i tillæg
Mulighed for Connection
kogeplade

MULIGHEDER FOR TILVALG

01MO-GAVL

Gavlmotor til udendørs brug
1000 m3/h

01MO-GAVL-15

Gavlmotor til udendørs brug
1500 m3/h

01MO-LOFT

Loftmotorer under taget 950
m3/h

01MO-LOFT-13

Loftmotor 1300 m3 Ø200 mm

01MO-SLIM

Slimlinemotor 800 m3

07MAGIC

Beskyttende rensklude til
rustfrit stål. Kasse med 10 klude

KACL.1049

Carbon.Zeo Microtech
regenererbart filter til
loftsemhætter op til 100 cm

KACL.770#41F

Loftmotorer 1100 m3/h

Brushless

KACL.939#BF

Recirkulationskit (01RECIRK) til
brug med Slimlinemotor. Til
loftsemfang.

TEKNISK BESKRIVELSE

Installation

Emhætte til loft

Dimensioner

90 cm

Materiale

Scotch brite rustfrit stål (AISI
304)

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

No lighting

Filter

3 x Metallfiltere - Base - 290x267
mm

EMBALLAGE: VÆGT OG VOLUMEN

NUBE Bruttovægt

23.3 kg

Nettovægt

20.5 kg

Volumen

0.14 m³

Mål på emballage

Længde

1120 mm

Højde

190 mm

Dybde

670 mm

EKSTERN MOTOR

Slimlinemotor 800 m3

Bruttovægt

6.5 kg

Nettovægt

5.2 kg

Volumen

0.04 m³

Mål på emballage

Længde

575 mm

Højde

195 mm

Dybde

395 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

550 m³/h

I.E.C. 61591

Maksimalt støjniveau

66 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)


600 Pa

Maksimal sugestyrke

150 W

ENERGIKLASSE

B



NUBE

Slimlinemotor 800 m3

Sortiment

Design+


EAN Kode

8034122355405

DATABLAD MOTOR

| Motorhastighed | 1 | 2 | 3 | 4 |
|---|--------|--------|--------|--------|
| Støjniveau dB(A)re1pW- I.E.C.60704-2-13 | 52 | 58 | 63 | 66 |
| Kapacitet (m3/h) I.E.C.61591 | 285 | 340 | 470 | 550 |
| Maksimalt tryk (Pa) | 400 | 480 | 500 | 600 |
| Forbrug (W) | 100 | 110 | 120 | 150 |
| Luftudtag | 220x90 | 220x90 | 220x90 | 220x90 |

KAPACITET / TRYK

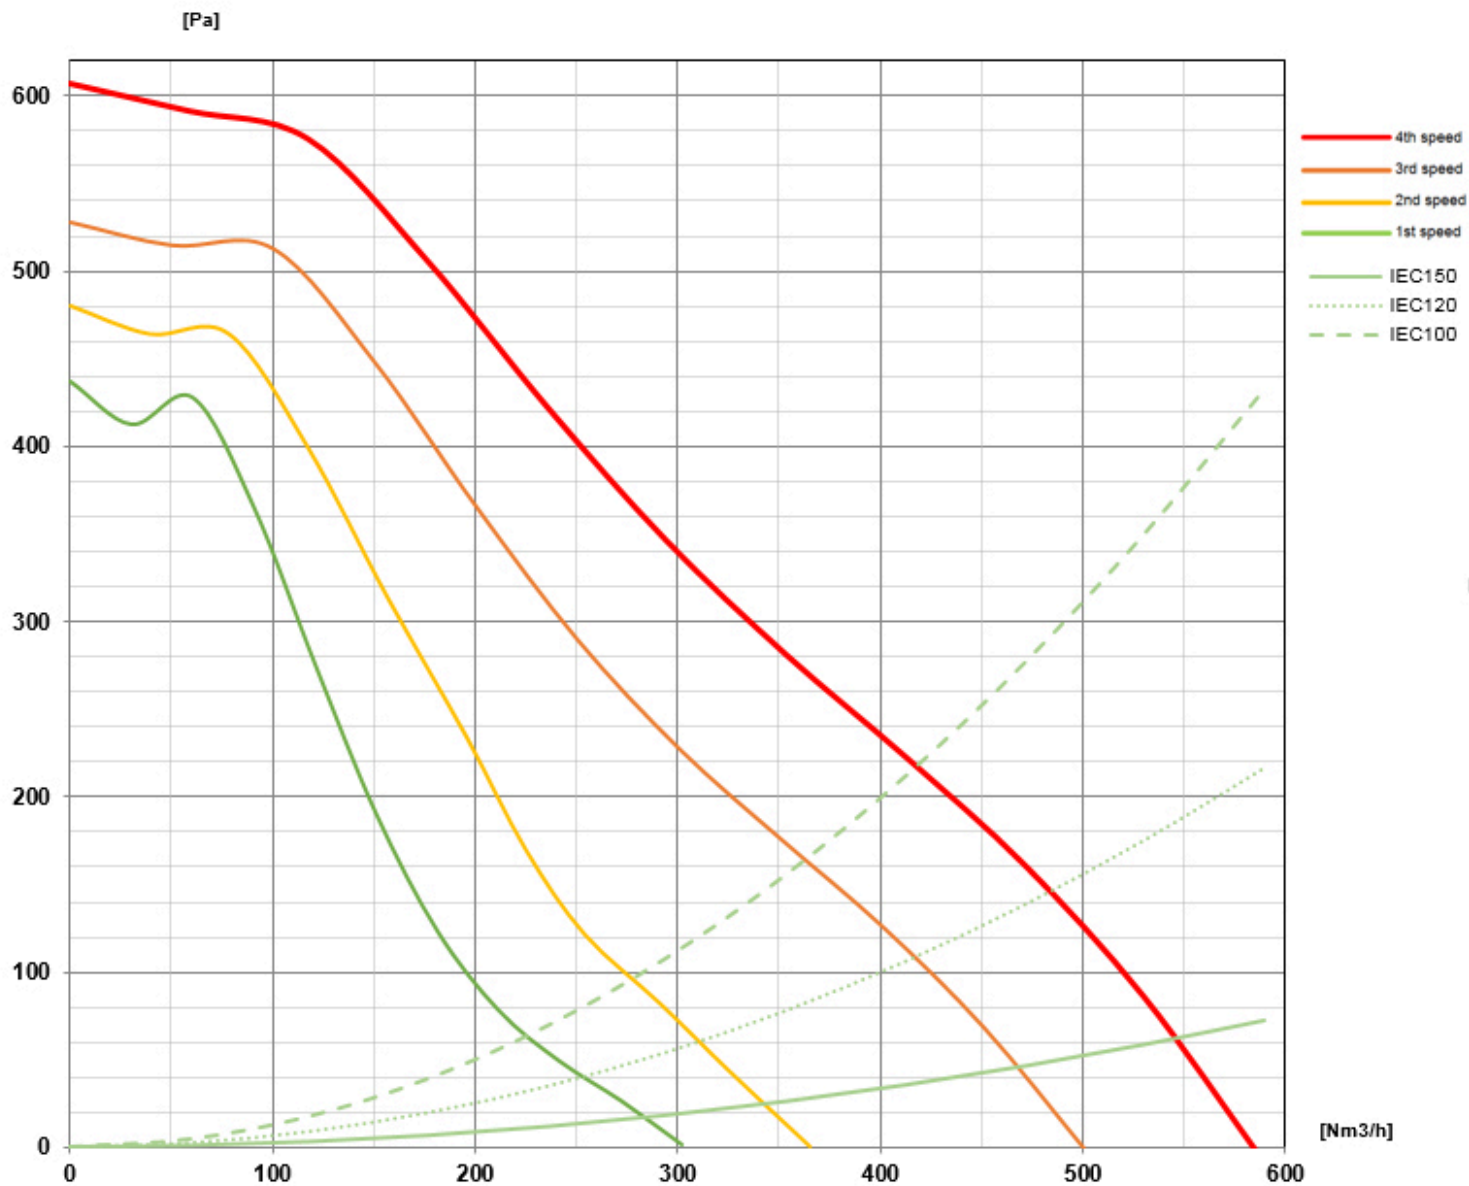

NUBE


Slimlinemotor 800 m3

Sortiment

Design+

EAN Kode

8034122355405

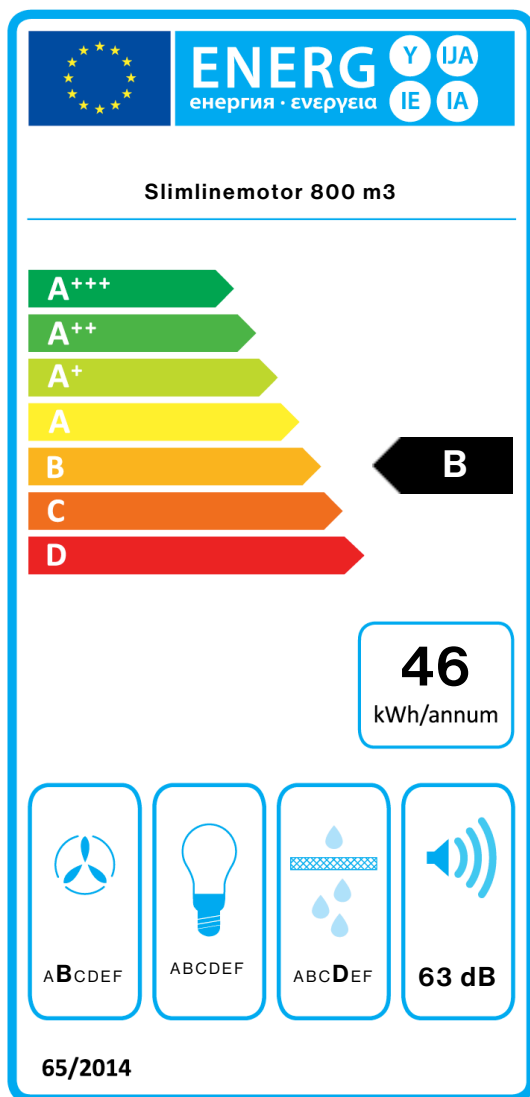

| PF | | |
|------------|----------------------|-------------------|
| S | Falmec Spa | |
| M | Slimlinemotor 800 m3 | |
| AEC | 46,2 | kWh/a |
| EEC | B | |
| FDE | 24,3 | |
| FDEC | B | |
| LE | 0,0 | |
| LEC | 0 | |
| GFE | 65,1 | |
| GFEC | D | |
| Qmin | 285,0 | m ³ /h |
| Qmax | 470,0 | m ³ /h |
| Qboost | 550,0 | m ³ /h |
| SPEmin | 52 | dBa |
| SPEmax | 63 | dBa |
| SPEboost | 66 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1.1 | |
| EEL | 58,8 | |
| Qbep | 337,0 | m ³ /h |
| Pbep | 298 | Pa |
| Qboost | 550,0 | m ³ /h |
| Wbep | 115,0 | W |
| WL | 0,00 | W |
| Emiddle | 0 | lux |
| Lwa-SPEmax | 63 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.