

NUBE

Versiune

Motor Slim 800 m³/h

Colectie

Design+

Cod EAN

8034122355405



Fotografie cu caracter strict orientativ
Acesta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Aspiratie perimetrala
Control electronic
Filtru de grasime metalic, detasabil si lavabil
Telecomanda inclusa

Dimensiune decupaj: 505x940 mm

ACCESORII OPTIONALE

KACL.770#41F

Motor de acoperis 1100 m³/h
Brushless

KACL.782#49F

Motor Slim 800 m³/h

KACL.786#41F

Motor de exterior 1000 m³/h

KACL.796#4AF

Motor de exterior 1500 m³/h

KACL.797#4AF

Motor de acoperis 1300 m³/h

KACL.798#41F

Motor de acoperis 950 m³/h

KACL.815

Lavete pentru curatare inox
(cutie 10 buc)

KACL.939#BF

Kit de filtrare pentru verisunea recirculare in plafon (doar pentru Motorul Slim)

CARACTERISTICI TEHNICE

Tip de instalare

De plafon

Dimensiuni

90 cm

Finisaj

Inox Scotch Brite (AISI 304)

Tipul panoului de control

Control electronic

Setari de viteza

4

Iluminare

No lighting

Filtru

3 x Filtru metalic "Base" -
290x267 mm

AMBALARE: GREUTATE SI VOLUM

NUBE Greutate bruta

23.3 kg

Greutate neta

20.5 kg

Volum

0.14 m³

Dimensiuni ambalaj

Lungime

1120 mm

Inaltime

190 mm

Adancime

670 mm

TELECOMANDA Motor Slim

800 m³/h **Greutate bruta**

6.5 kg

Greutate neta

5.2 kg

Volum

0.04 m³

Dimensiuni ambalaj

Lungime

575 mm

Inaltime

195 mm

Adancime

395 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

550 m³/h

I.E.C. 61591

Nivel de zgomot maxim

66 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


600 Pa

Putere maxima motor

150 W

CLASA DE ENERGIE

B



Hood and motor dimensions

NUBE

Versiune

Motor Slim 800 m³/h

Colectie

Design+


Cod EAN

8034122355405

FISA TEHNICA MOTOR

| Viteza motorului | 1 | 2 | 3 | 4 |
|--|--------|--------|--------|--------|
| Nivel de zgomot dB(A)re1pW- I.E.C.60704-2-13 | 52 | 58 | 63 | 66 |
| Capacitate (m ³ /h) I.E.C.61591 | 285 | 340 | 470 | 550 |
| Presiune maxima (Pa) | 400 | 480 | 500 | 600 |
| Putere motor (W) | 100 | 110 | 120 | 150 |
| Evacuare aer | 220x90 | 220x90 | 220x90 | 220x90 |

CAPACITATE/ PRESIUNE

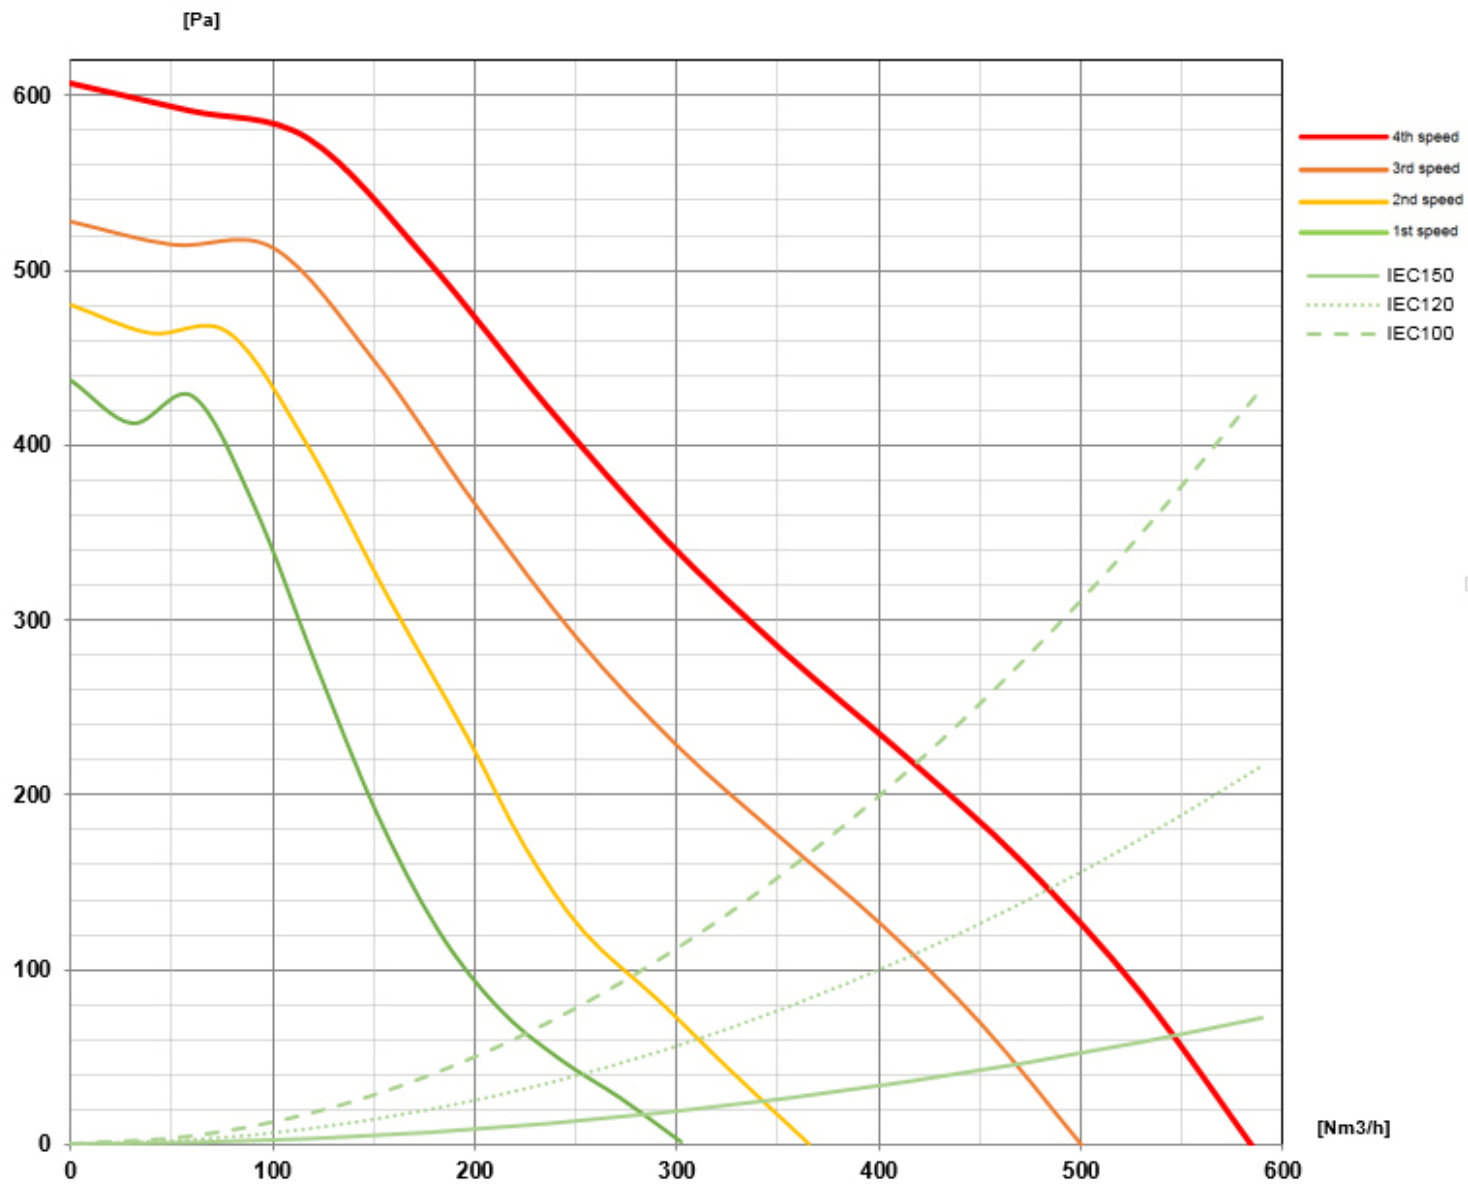

NUBE

Versiune

Motor Slim 800 m³/h


Colectie

Design+

Cod EAN

8034122355405

ETICHETA DE ENERGIE

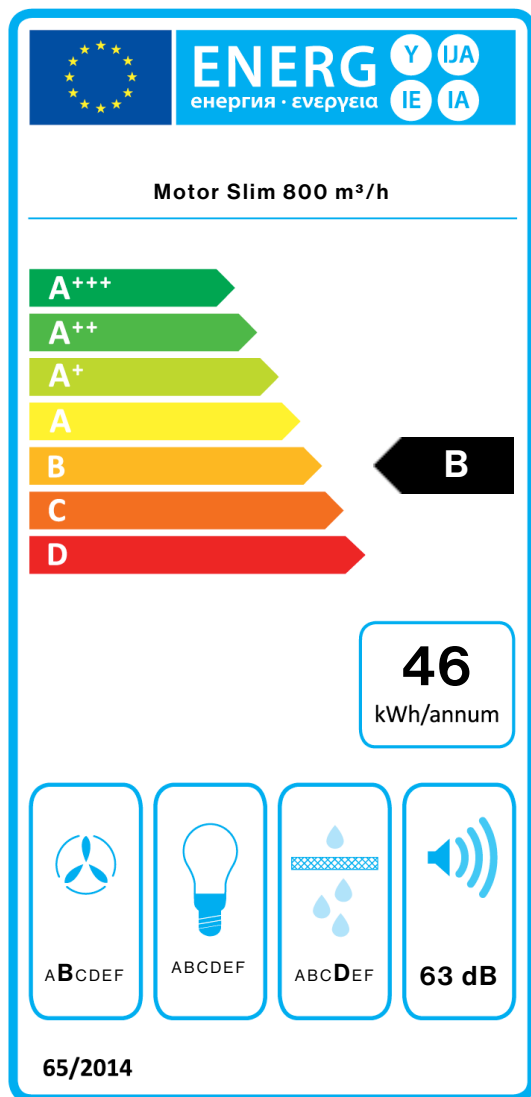

| PF | | |
|------------|----------------------------------|-------------------|
| S | Falmec Spa | |
| M | Motor Slim 800 m ³ /h | |
| AEC | 46,2 | kWh/a |
| EEC | B | |
| FDE | 24,3 | |
| FDEC | B | |
| LE | 0,0 | |
| LEC | 0 | |
| GFE | 65,1 | |
| GFEC | D | |
| Qmin | 285,0 | m ³ /h |
| Qmax | 470,0 | m ³ /h |
| Qboost | 550,0 | m ³ /h |
| SPEmin | 52 | dBa |
| SPEmax | 63 | dBa |
| SPEboost | 66 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1.1 | |
| EEl | 58,8 | |
| Qbep | 337,0 | m ³ /h |
| Pbep | 298 | Pa |
| Qboost | 550,0 | m ³ /h |
| Wbep | 115,0 | W |
| WL | 0,00 | W |
| Emiddle | 0 | lex |
| Lwa-SPEmax | 63 | dBa |