

PIANO - SINGLE INLET

Version

Worktop - Single inlet

Collection

Integrated cooking systems

EAN code

8034122354859

KACL.701#41F

Motor 1000 m³/h

Collection

Accessoires

EAN code

8034122710044



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel (AISI 304)

Touch control

Optional combined regenerable Carbon.Zeo filter

Piano can be installed only with electric hobs.

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.798#41F

Remote under-roof motor 950 m³/h

KACL.701#41F

Motor 1000 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h

Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

KACL.345

Double horizontal elbow

KACL.760

Junction for Piano with one inlet and left outlet

KACL.761

Deeper junction for Piano with one inlet and under cabinet motor with right outlet.

KACL.945

Underbase Carbon.Zeo "Compact" filtering unit H10 cm

KACL.946

Underbase Carbon.Zeo "Compact" filtering unit - Spare

TECHNICAL FEATURES

Installation type

Worktop

Dimensions

13x53 cm

Finishing

Scotch brite stainless steel (AISI 304)

Type of control

Touch control

Speed settings

4

Charcoal filter

Kit filter Carbon.Zeo + grid

PACKAGING:WEIGHTS AND VOLUMES

PIANO - SINGLE INLET

Worktop - Single inlet

Gross weight

18.50 kg

Net weight

15.00 kg

Volume

0.14 m³

Packaging size

Length

710 mm

Height

595 mm

Depth

340 mm

REMOTE MOTOR

Motor 1000 m³/h

Gross weight

7.50 kg

Net weight

6.50 kg

Volumes

0.04 m³

Packaging size

Length

470 mm

Height

170 mm

Depth

465 mm

CONSUMPTION AND CONNECTION FEATURES

Voltage / Frequency

220-240V

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

560 m³/h

I.E.C. 61591

Maximum noise level

71 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

660 Pa

Max. motor power

163 W

ENERGY CLASS

B

PIANO - SINGLE INLET

KACL.701#41F
Motor 1000 m³/h

Version

Worktop - Single inlet

Collection

Integrated cooking systems

EAN code

8034122354859


Collection

Accessoires


EAN code

8034122710044


Frontal view




Side view




Upper view




KACL.701#41F - Motor 1000 m³/h




KACL.760 (optional) Junction for Piano with one inlet and left outlet




KACL.761 (optional) Deeper junction for Piano with one inlet and under cabinet motor with right outlet



KACL.938 (optional) Kit filter Carbon.Zeo with base board grid (2pcs)



KACL.345 (optional) Double horizontal elbow



PIANO - SINGLE INLET

KACL.701#41F
Motor 1000 m³/h

Version

Worktop - Single inlet

Collection

Integrated cooking systems

EAN code

8034122354859

Collection

Accessoires


EAN code

8034122710044

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	62	67	69	71
Capacity (m3/h) I.E.C.61591 Normalized Pipes	390	465	510	560
Maximum pressure (Pa)	540	600	640	660
Motor Power (W)	140	147	152	163
Air outlet	220x90220x90220x90220x90			

CAPACITY / PRESSURE

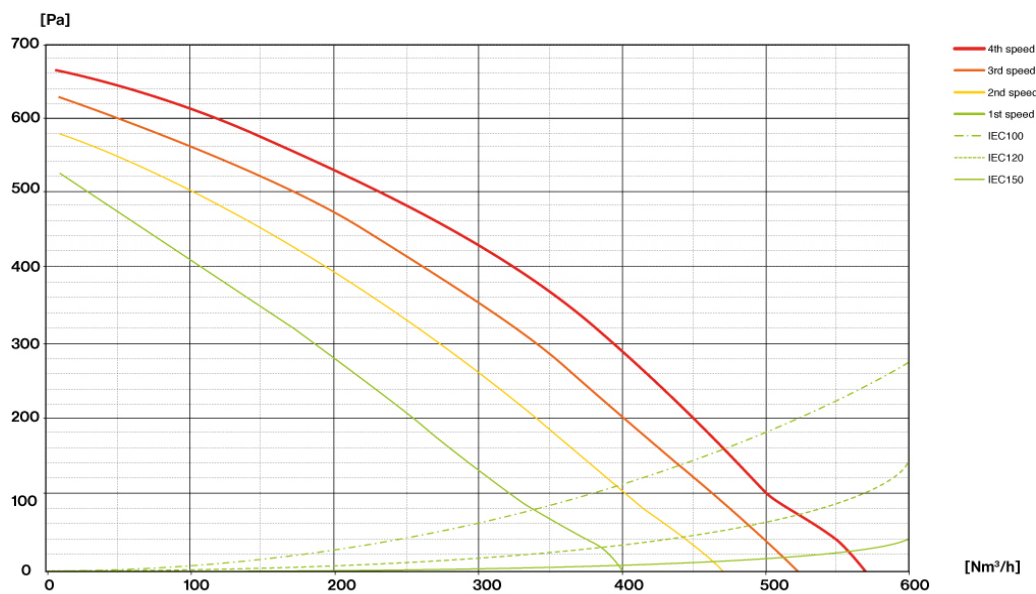

PIANO - SINGLE INLET

KACL.701#41F
Motor 1000 m³/h

Version

Worktop - Single inlet

Collection

Accessoires

Collection

Integrated cooking systems


EAN code

8034122710044

EAN code

8034122354859

ENERGY LABEL

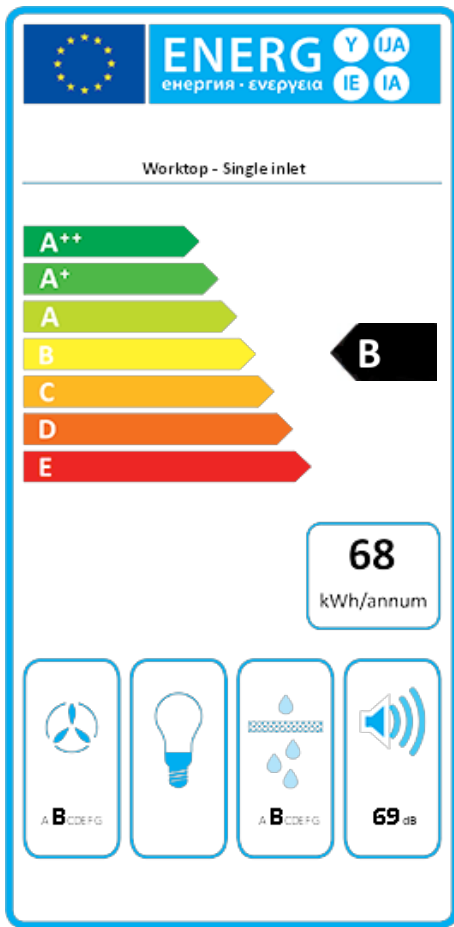

PF		
S	Falmec Spa	
M	Worktop - Single inlet	
AEC	67,5	kWh/a
ECC	B	
FDE	23,2	
FDEC	B	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	390,0	m ³ /h
Qmax	510,0	m ³ /h
Qboost	560,0	m ³ /h
SPEmin	62	dBa
SPEmax	69	dBa
SPEboost	71	dBa
PO	-	W
PS	0,50	W
PI		
F	1,2	
EEl	67,5	
Qbep	284,0	m ³ /h
Pbep	453	Pa
Qboost	560,0	m ³ /h
Wbep	154,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	69	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.