

PIANO - SINGLE INLET

Version
Motor 1000 m³/h

Collection
Cooking systems

EAN code
8034122354859



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Touch control
Optional combined regenerable
Carbon.Zeo filter

Piano can be installed only with electric hobs.

OPTIONAL ACCESSORIES

- KACL.345**
Double horizontal elbow
- KACL.701#41F**
Motor 1000 m3/h
- KACL.760**
Junction for Piano with one inlet and left outlet
- KACL.761**
Deeper junction for Piano with one inlet and under cabinet motor with right outlet.
- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.938**
Kit filter Carbon.Zeo + grid
- KACL.945**
Underbase Carbon.Zeo
“Compact” filtering unit H10 cm
- KACL.946**
Underbase Carbon.Zeo
“Compact” filtering unit - Spare

TECHNICAL FEATURES

Installation type
Worktop
Dimensions
13x53 cm
Finishing
Scotch brite stainless steel (AISI 304)
Type of control
Touch control
Speed settings
4
Charcoal filter
Kit filter Carbon.Zeo + grid (optional)

PACKAGING:WEIGHTS AND VOLUMES





PIANO - SINGLE INLET Gross weight
18.5 kg
Net weight
15 kg
Volumes
0.14 m³
Packaging size
Length
710 mm
Height
340 mm
Depth
595 mm
REMOTE MOTOR Motor 1000 m³/h **Gross weight**
7.5 kg
Net weight
6.5 kg
Volumes
0.04 m³
Packaging size
Length
470 mm
Height
170 mm
Depth
465 mm

CONSUMPTION AND CONNECTION FEATURES


Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET


Maximum capacity
560 m³/h
I.E.C. 61591
Maximum noise level
71 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
660 Pa
Max. motor power
163 W
ENERGY CLASS
B




Frontal view




Side view



Upper view



KACL.701#41F - Motor 1000 m3/h



KACL.760 (optional) Junction for Piano with one inlet and left outlet

KACL.761 (optional) Deeper junction for Piano with one inlet and under cabinet motor with right outlet

KACL.938 (optional) Kit filter Carbon.Zeo with base board grid (2pcs)

KACL.345 (optional) Double horizontal elbow

PIANO - SINGLE INLET

Version
Motor 1000 m³/h


Collection
Cooking systems

EAN code
8034122354859

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	62	67	69	71
Capacity (m3/h) I.E.C.61591	390	465	510	560
Maximum pressure (Pa)	540	600	640	660
Motor Power (W)	140	147	152	163
Air outlet	220x90	220x90	220x90	220x90

CAPACITY / PRESSURE

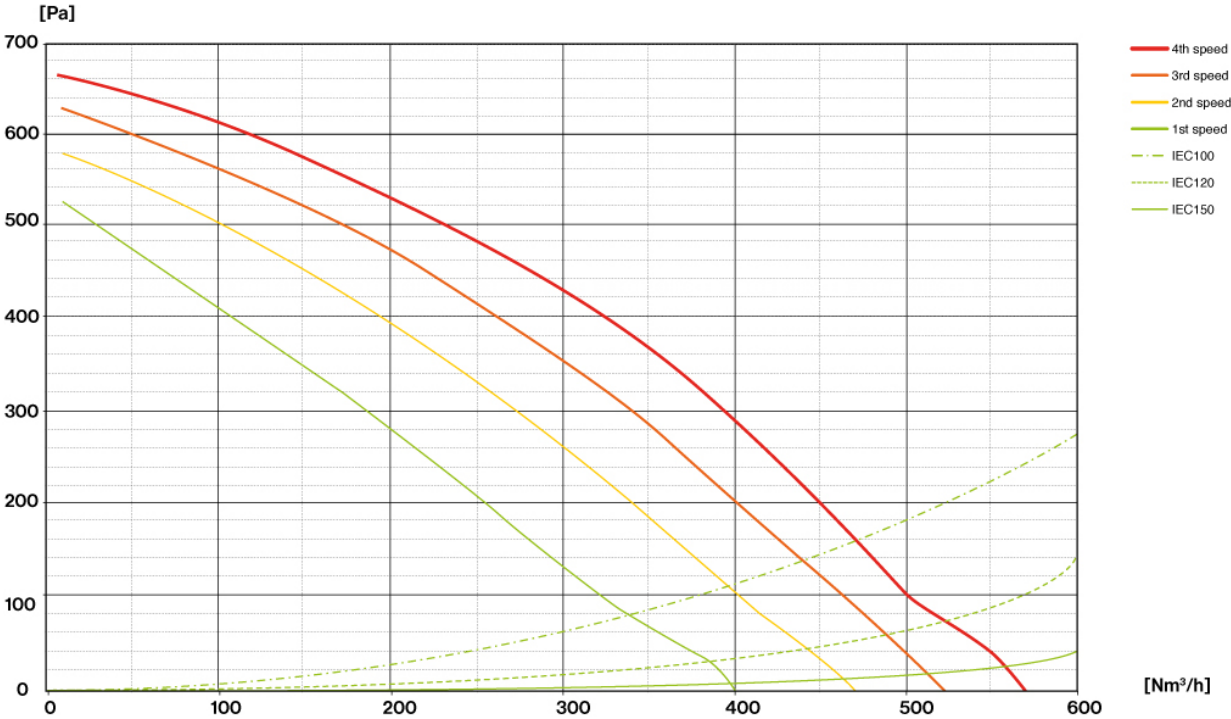


PIANO - SINGLE INLET

Version
Motor 1000 m³/h

Collection
Cooking systems

EAN code
8034122354859

ENERGY LABEL

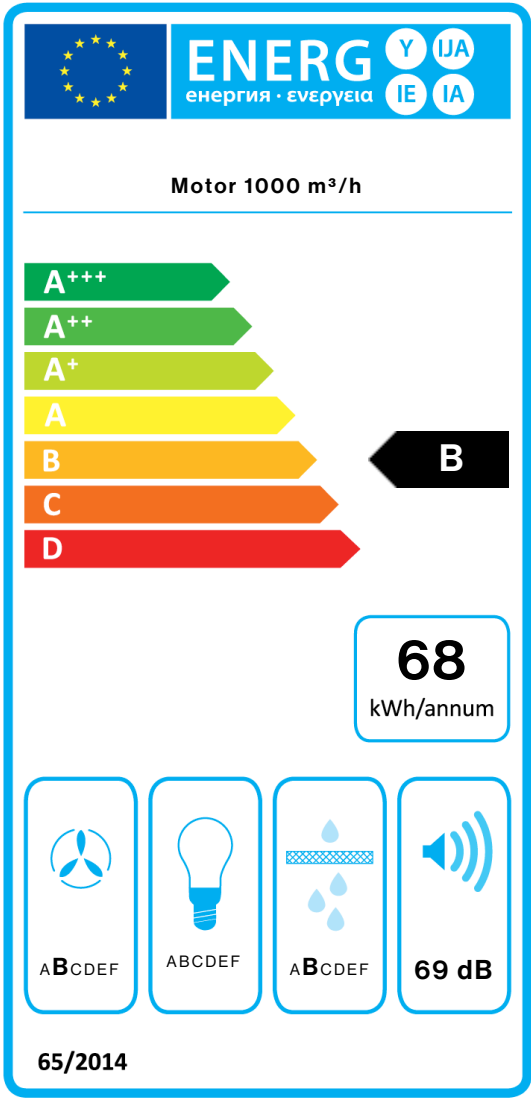

PF		
S	Falmec Spa	
M	Motor 1000 m³/h	
AEC	67,5	kWh/a
EEC	B	
FDE	23,2	
FDEC	B	
LE	0,0	
LEC	0	
GFE	87,0	
GFEC	B	
Qmin	390,0	m³/h
Qmax	510,0	m³/h
Qboost	560,0	m³/h
SPEmin	62	dBa
SPEmax	69	dBa
SPEboost	71	dBa
PO	-	W
PS	0,50	W
PI		
F	1.2	
EEL	67,5	
Qbep	284,0	m³/h
Pbep	453	Pa
Qboost	560,0	m³/h
Wbep	154,0	W
WL	0,00	W
Emiddle	0	lex
Lwa-SPEmax	69	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.