

STELLA

Version
Slim motor 800 m³/h

Collection
Design+


EAN code
8034122349145

FEATURES

- Painted white steel
- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Remote control included
- Dynamic LED Light (2700K - 5600K)
- Motor sold separately

Cut-out size: 505 x 940 mm
OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.782#49F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.939#BF**
Ceiling re-circulation filtering kit (only for Slim Motor)
- 105080053**
Remote control



Hood and motor dimensions



The photograph is purely for information
It may not correspond to the selected version.

TECHNICAL FEATURES

- Installation type**
Ceiling
- Dimensions**
90 cm
- Finishing**
Painted white steel
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 4x3,6 W - 2700 K / 5600 K
- Filter**
2 x Metallic filter "Base" - 290x326 mm
- Maximum distance**
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES

- STELLA Gross weight**
24.5 kg
- Net weight**
21.7 kg
- Volumes**
0.14 m³
- Packaging size**

- Length
1120 mm
 - Height
190 mm
 - Depth
670 mm
- REMOTE MOTOR Slim motor**
800 m³/h **Gross weight**
6.5 kg
- Net weight**
5.2 kg
 - Volumes**
0.04 m³
 - Packaging size**
- Length
575 mm
 - Height
195 mm
 - Depth
395 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
30 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko
- ENERGY CLASS**
C


STELLA

Version
Slim motor 800 m³/h

Collection
Design+

EAN code
8034122349145

ENERGY LABEL

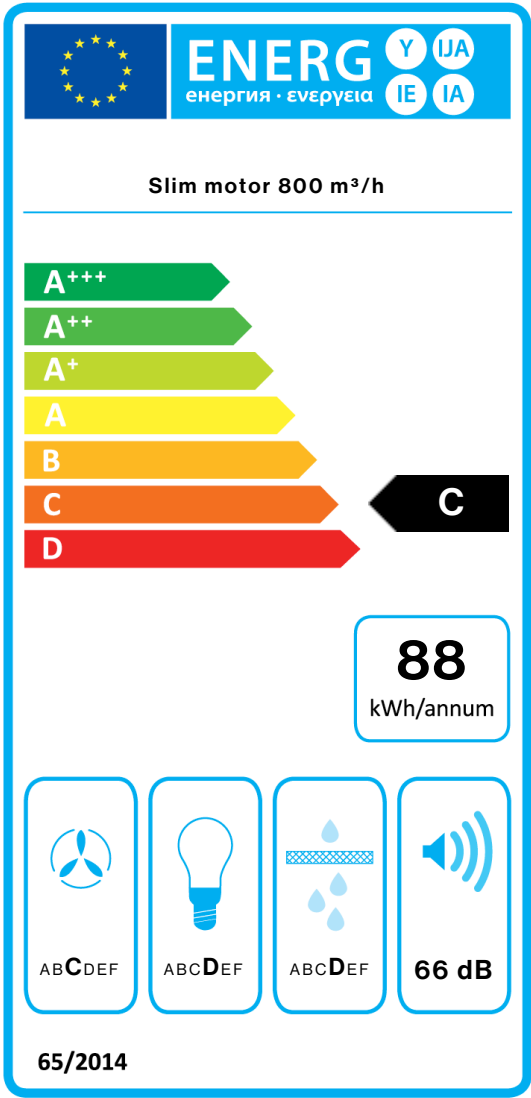

PF		
S	Falmec Spa	
M	Slim motor 800 m³/h	
AEC	88,3	kWh/a
EEC	C	
FDE	20,6	
FDEC	C	
LE	12,8	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	330,0	m³/h
Qmax	580,0	m³/h
Qboost	680,0	m³/h
SPEmin	54	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,68	W
PI		
F	1.3	
EEL	78,3	
Qbep	363,0	m³/h
Pbep	328	Pa
Qboost	680,0	m³/h
Wbep	160,5	W
WL	16,70	W
Emiddle	214	lex
Lwa-SPEmax	66	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.