

STELLA

Version

Ceiling 90 cm - White

Collection

Design+

EAN code

8034122349145

KACL.798#41F

Remote under-roof motor 950 m³/h

Collection

Accessoires

EAN code

8034122709833



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Painted white steel

Perimeter suction

Electronic control

Metallic grease filter, removable and washable

Remote control included

Dynamic LED Light (2700K - 5600K)

Cut-out size: 505 x 940 mm

OPTIONAL ACCESSORIES

KACL.782#49F

Slim motor 800 m³/h

KACL.798#41F

Remote under-roof motor 950 m³/h

KACL.770#41F

Remote under-roof 1100 m³/h

Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

KACL.939#BF

Ceiling re-circulation filtering kit (only for Slim Motor)

TECHNICAL FEATURES

Installation type

Ceiling

Dimensions

90 cm

Finishing

Painted white steel

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x3,6 W - 2700 K / 5600 K

Filter

Metallic filter "Base" - 290x326 mm - 2 pz

PACKAGING:WEIGHTS AND VOLUMES

STELLA

Ceiling 90 cm - White

Gross weight

24.50 kg

Net weight

21.70 kg

Volume

0.14 m³

Packaging size

Length

1120 mm

Height

670 mm

Depth

190 mm

REMOTE MOTOR

Remote under-roof motor 950 m³/h

Gross weight

10.00 kg

Net weight

9.00 kg

Volumes

0.06 m³

Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

275 W

Voltage / Frequency

220-240V

50-60Hz

Plug type

Shuko

ENERGY CLASS

B

STELLA

Version

Ceiling 90 cm - White

Collection

Design+

EAN code

8034122349145

KACL.798#41F

Remote under-roof motor 950

m³/h


Collection

Accessoires

EAN code

8034122709833

ENERGY LABEL

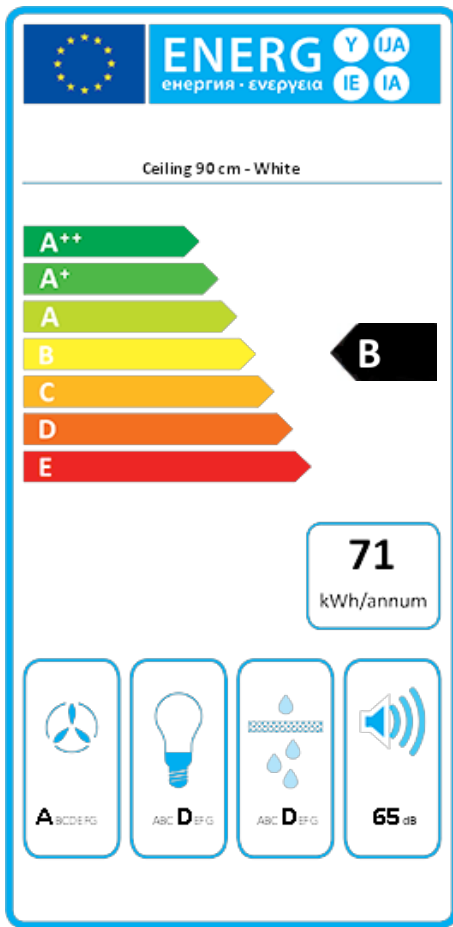

PF		
S	Falmec Spa	
M	Ceiling 90 cm - White	
AEC	71,3	kWh/a
ECC	B	
FDE	29,5	
FDEC	A	
LE	12,8	
LEC	D	
GFE	65,1	
GFEC	D	
Qmin	360,0	m ³ /h
Qmax	630,0	m ³ /h
Qboost	880,0	m ³ /h
SPEmin	51	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,68	W
PI		
F	0,9	
EEl	57,7	
Qbep	441,0	m ³ /h
Pbep	434	Pa
Qboost	880,0	m ³ /h
Wbep	180,0	W
WL	16,70	W
Emiddle	214	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.