

DOWN DRAFT

Version
Remote under-roof motor 950 m³/h

Collection
Design+

EAN code
8034122348094



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Perimeter suction
- Touch control + 24 h function
- LED lighting
- Top filter, removable and washable
- Optional combined regenerable Carbon.Zeo filter
- Optional remote control

Panoramic hobs are recommended with this hood.

OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.784#46F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.930**
Kit filters Carbon.Zeo
- KACL.951**
Underbase Slim filter unit (h60mm)
- 105080053**
Remote control

TECHNICAL FEATURES

- Installation type**
Worktop
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Type of control**
Touch control
- Speed settings**
4
- Lighting**
Led stripe
- Filter**
2 x Metallic filter "Top" - 254x216 mm
- Charcoal filter**
Kit filters Carbon.Zeo (optional)

PACKAGING:WEIGHTS AND VOLUMES





- DOWN DRAFT Gross weight**
44 kg
- Net weight**
37 kg
- Volumes**
0.34 m³
- Packaging size**
Length
1070 mm
Height
370 mm
Depth
870 mm
- REMOTE MOTOR** Remote under-roof motor 950 m³/h
- Gross weight**
10 kg
- Net weight**
9 kg
- Volumes**
0.06 m³
- Packaging size**
Length
435 mm
Height
340 mm
Depth
385 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
30 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
730 m³/h
I.E.C. 61591
- Maximum noise level**
68 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
580 Pa
- Max. motor power**
240 W
- ENERGY CLASS**
B

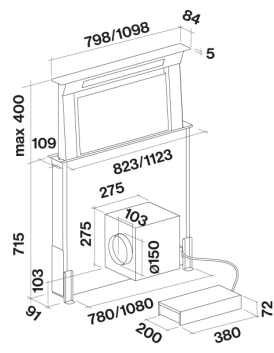

DOWN DRAFT

Version
Remote under-roof motor 950
m³/h


Collection
Design+

EAN code
8034122348094

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	51	59	64	68
Capacity (m3/h) I.E.C.61591	330	480	610	730
Maximum pressure (Pa)	460	520	560	580
Motor Power (W)	187	210	225	240
Air outlet	150	150	150	150

CAPACITY / PRESSURE

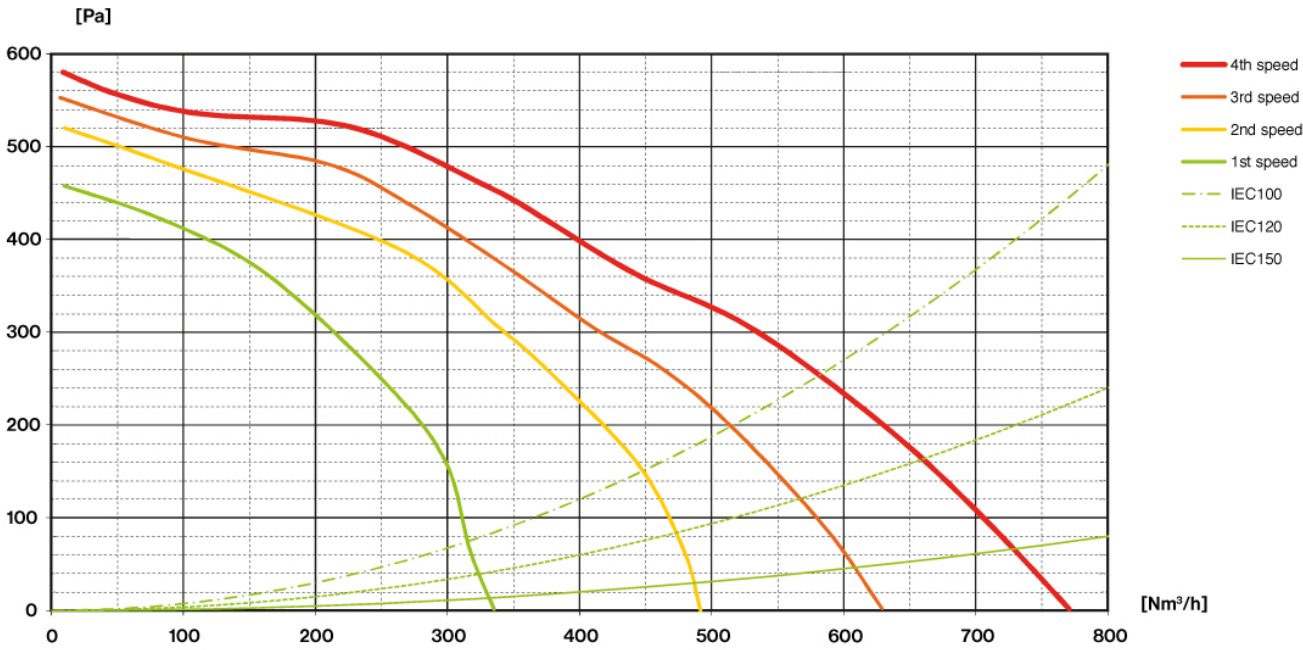


DOWN DRAFT

Version
Remote under-roof motor 950
m³/h

Collection
Design+

EAN code
8034122348094

ENERGY LABEL

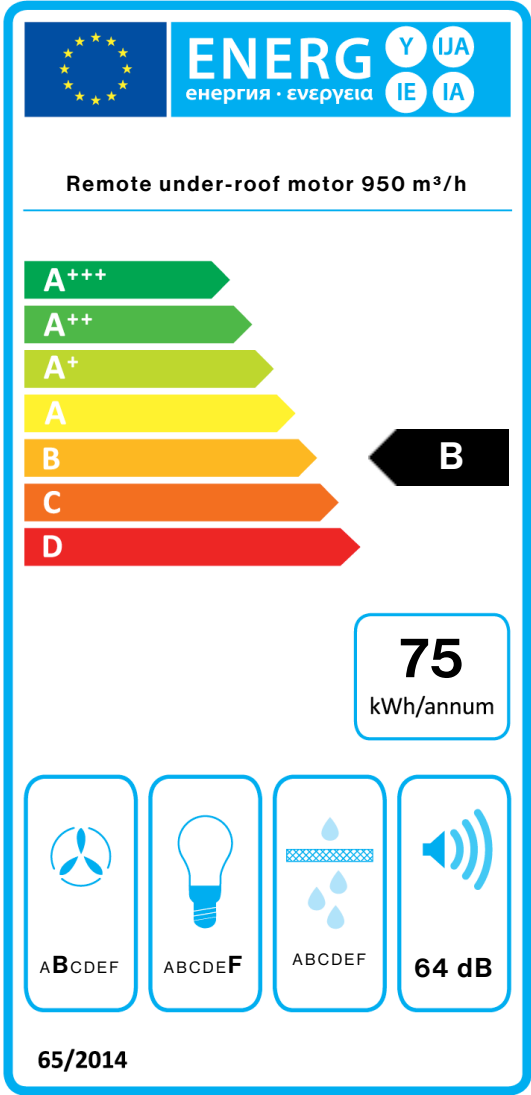

PF		
S	Falmec Spa	
M	Remote under-roof motor 950 m³/h	
AEC	75,4	kWh/a
EEC	B	
FDE	24,6	
FDEC	B	
LE	6,5	
LEC	F	
GFE	36,0	
GFEC	G	
Qmin	330,0	m³/h
Qmax	610,0	m³/h
Qboost	730,0	m³/h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,95	W
PI		
F	1.1	
EEL	65,2	
Qbep	369,0	m³/h
Pbep	422	Pa
Qboost	730,0	m³/h
Wbep	176,0	W
WL	6,50	W
Emiddle	42	lex
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.