falmec

DOWN DRAFT

Slim motor 600 m³/h

Sortiment
Design+

EAN Kode
8034122348087

Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Kantsug
Touch control og 24 t. funktion
TOP Vaskbare rustfrie fedtfiltre
Mulighed for Kul/Zeolitfilter. Regenererbart
Tilvalg fjernbetjening
Motor sold separately
Mulighed for Connection kogeplade
Strip LED

Kogeplade på række anbefales til denne model.

MULIGHEDER FOR TILVALG

01-FJERN
Fjernbetjening med display
01MO-GAVL
Gavlmotor til udendørs brug 1000 m3/h
01MO-GAVL-15
Gavlmotor til udendørs brug 1500 m3/h
01MO-LOFT
Loftmotorer under taget 950 m3/h
01MO-LOFT-13
Loftmotor 1300 m3 Ø200 mm
07MAGIC
Beskyttende renseklude til rustfrit stål. Kasse med 10 klude
KACL.770#41F
Loftmotorer 1100 m3/h Brushless
KACL.784#46F
Slim motor 600 m3/h
KACL.930
Kit kul / zeolitfilter
KACL.951
Underbase Slim filter unit (h60mm)

TEKNISK BESKRIVELSE

Installation
Kogeplade
Dimensioner
90 cm
Materiale
Scotch brite rustfrit stål (AISI 304)
Hvidt tempereret glas
Betjening
Betjening med touch
Hastighed
3 + boost
Belysning
LED stribe
Filter
2 x Metalfiltre - Top - 254x216 mm
Kulfilter
Kit kul / zeolitfilter (Tilvalg)

EMBALLAGE: VÆGT OG VOLUMEN

DOWN DRAFT Bruttovægt
44 kg
Nettovægt
37 kg
Volumen
0.34 m³
Mål på emballage
Længde
1070 mm
Højde
370 mm
Dybde
870 mm
EKSTERN MOTOR Slim motor 600 m³/h **Bruttovægt**
10.3 kg
Nettovægt
9 kg
Volumen
0.07 m³
Mål på emballage
Længde
515 mm
Højde
440 mm
Dybde
320 mm

FORBRUG OG TILSLUTNINGSMULIGHER

Maksimalt forbrug
30 W
Spænding
220-240V
Frekvens
50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet
620 m³/h
I.E.C. 61591
Maksimalt støjniveau
67 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
400 Pa
Maksimal sugestyrke
270 W
ENERGIKLASSE
C


798/1098
84
5
max 400
109
823/1123
349
246
91
321
361


84
5°
97
191


84
5°
97
191


84
5°
53
191

falmec

DOWN DRAFT

Slim motor 600 m³/h

Sortiment
Design+

EAN Kode
8034122348087

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A)re1pW- I.E.C.60704-2-13	52	57	64	67
Kapacitet (m3/h) I.E.C.61591	325	330	550	620
Maksimalt tryk (Pa)	450	500	400	400
Forbrug (W)	200	230	240	270
Luftudtag	220x90	220x90	220x90	220x90

KAPACITET / TRYK

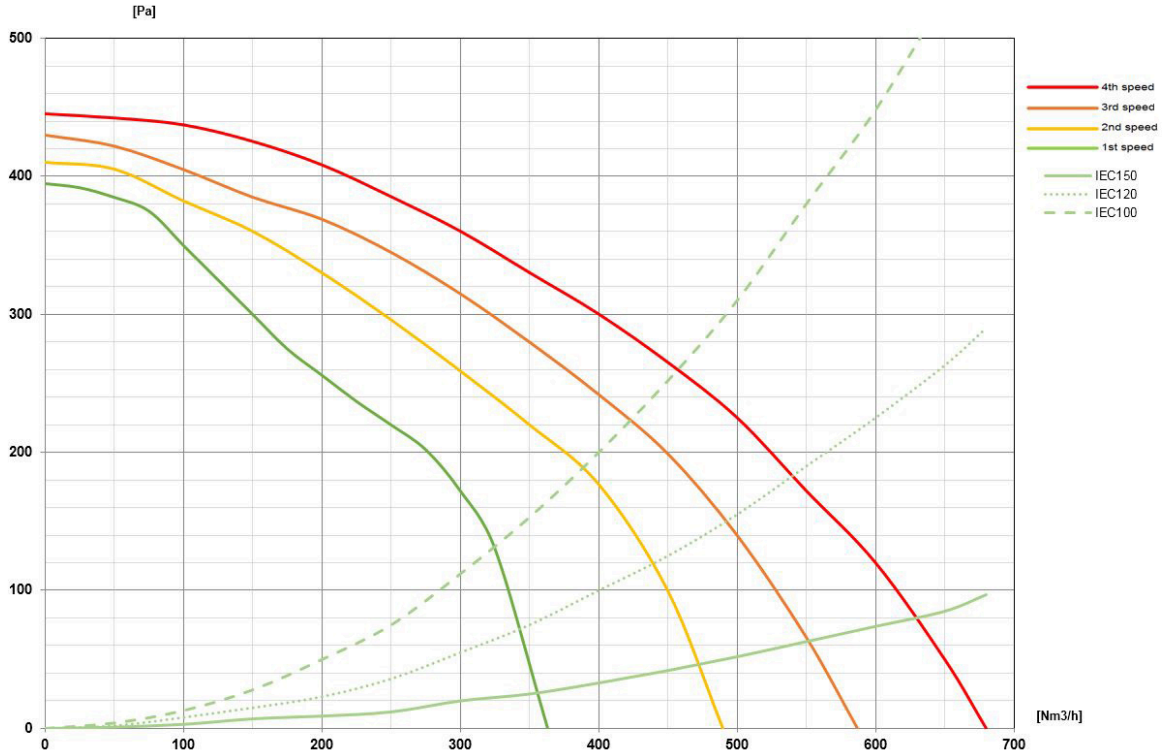

falmec

DOWN DRAFT

Slim motor 600 m³/h

Sortiment
Design+

EAN Kode
8034122348087

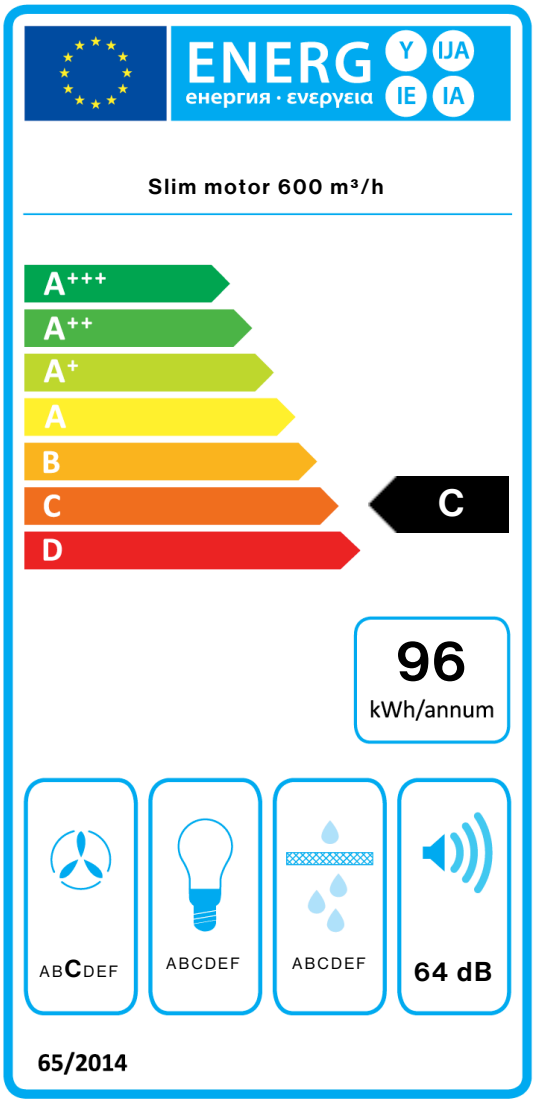

PF		
S	Falmec Spa	
M	Slim motor 600 m³/h	
AEC	95,5	kWh/a
EEC	C	
FDE	19,3	
FDEC	C	
LE	3,0	
LEC	G	
GFE	36,0	
GFEC	G	
Qmin	325,0	m³/h
Qmax	550,0	m³/h
Qboost	620,0	m³/h
SPEmin	52	dBa
SPEmax	64	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.3	
EEI	79,3	
Qbep	440,0	m³/h
Pbep	271	Pa
Qboost	620,0	m³/h
Wbep	172,0	W
WL	19,00	W
Emiddle	57	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.