

DOWN DRAFT

Slim motor 800 m³/h

Sortiment

Design+

EAN Kode

8034122348087



Fotografiet er udelukkende informativt

Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Kantsug
Touch control og 24 t. funktion
TOP Vaskbare rustfrie fedtfiltere
Mulighed for Kul/Zeolitfilter.
Regenererbart
Tilvalg fjernbetjening
Motor sold separatly
Mulighed for Connection
kogeplade
Strip LED

Kogeplade på række anbefales til denne model.

MULIGHEDER FOR TILVALG

01-FJERN

Fjernbetjening med display

01MO-GAVL

Gavlmotor til udendørs brug
1000 m³/h

01MO-GAVL-15

Gavlmotor til udendørs brug
1500 m³/h

01MO-LOFT

Loftmotorer under taget 950
m³/h

01MO-LOFT-13

Loftmotor 1300 m³ Ø200 mm

07MAGIC

Beskyttende rensklude til
rustfrit stål. Kasse med 10 klude

KACL.770#41F

Loftmotorer 1100 m³/h
Brushless

KACL.784#46F

Slim motor 800 m³/h

KACL.930

Kit kul / zeolitfilter

KACL.951

Underbase Slim filter unit
(h60mm)

TEKNISK BESKRIVELSE

Installation

Kogeplade

Dimensioner

90 cm

Materiale

Scotch brite rustfrit stål (AISI
304)

Hvidt tempereret glas

Betjening

Betjening med touch

Hastighed

3 + boost

Belysning

LED stribe

Filter

2 x Metalfiltere - Top - 254x216
mm

Kulfilter

Kit kul / zeolitfilter (Tilvalg)

EMBALLAGE: VÆGT OG VOLUMEN

DOWN DRAFT Bruttovægt

44 kg

Nettovægt

37 kg

Volumen

0.34 m³

Mål på emballage

Længde

1070 mm

Højde

370 mm

Dybde

870 mm

EKSTERN MOTOR Slim motor

800 m³/h **Bruttovægt**

10.3 kg

Nettovægt

9 kg

Volumen

0.07 m³

Mål på emballage

Længde

515 mm

Højde

440 mm

Dybde

320 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

30 W

Spænding

220-240V

Frekvens

50-60Hz

Shuko

DATABLAD MOTOR

Maksimal kapacitet

620 m³/h

I.E.C. 61591

Maksimalt støjniveau

67 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)





400 Pa

Maksimal sugestyrke

270 W

ENERGIKLASSE

C

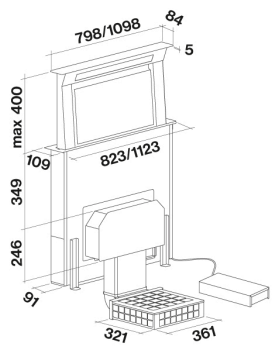

DOWN DRAFT

Slim motor 800 m³/h

Sortiment

Design+


EAN Kode

8034122348087

DATABLAD MOTOR

| Motorhastighed | 1 | 2 | 3 | 4 |
|---|--------|--------|--------|--------|
| Støjniveau dB(A)re1pW- I.E.C.60704-2-13 | 52 | 57 | 64 | 67 |
| Kapacitet (m ³ /h) I.E.C.61591 | 325 | 330 | 550 | 620 |
| Maksimalt tryk (Pa) | 450 | 500 | 400 | 400 |
| Forbrug (W) | 200 | 230 | 240 | 270 |
| Luftudtag | 220x90 | 220x90 | 220x90 | 220x90 |

KAPACITET / TRYK

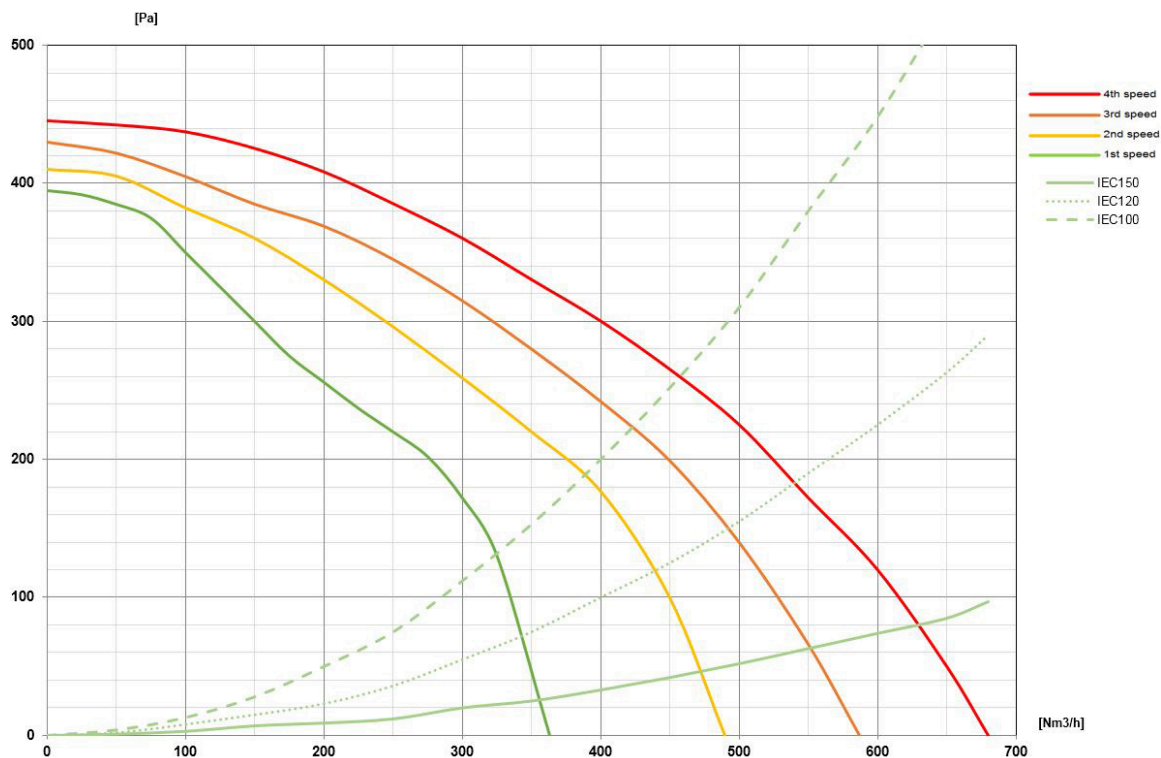

DOWN DRAFT


Slim motor 800 m³/h

Sortiment

Design+

EAN Kode

8034122348087

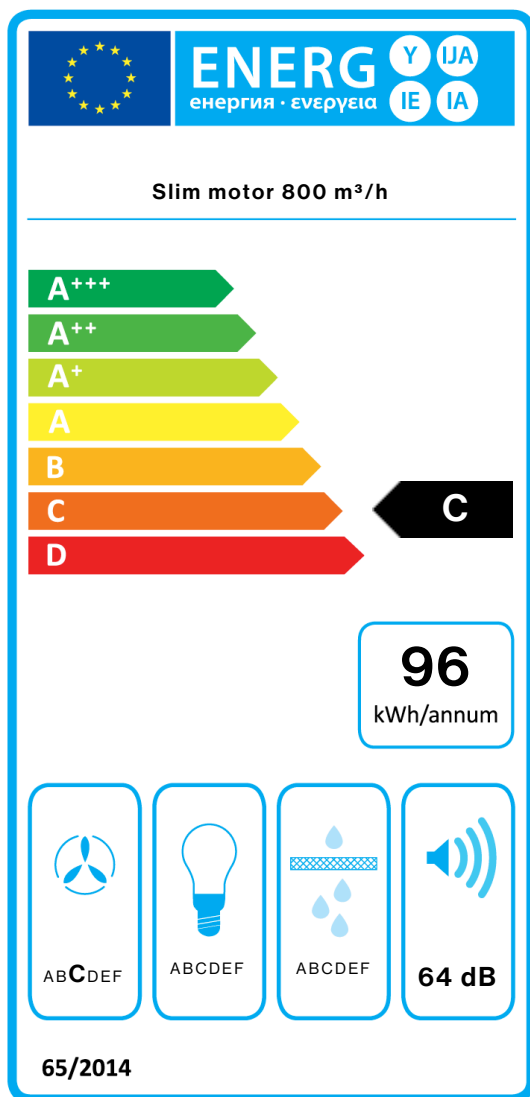

| PF | | |
|------------|----------------------------------|-------------------|
| S | Falmec Spa | |
| M | Slim motor 800 m ³ /h | |
| AEC | 95,5 | kWh/a |
| EEC | C | |
| FDE | 19,3 | |
| FDEC | C | |
| LE | 3,0 | |
| LEC | G | |
| GFE | 36,0 | |
| GFEC | G | |
| Qmin | 325,0 | m ³ /h |
| Qmax | 550,0 | m ³ /h |
| Qboost | 620,0 | m ³ /h |
| SPEmin | 52 | dBa |
| SPEmax | 64 | dBa |
| SPEboost | 67 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1,3 | |
| EEL | 79,3 | |
| Qbep | 440,0 | m ³ /h |
| Pbep | 271 | Pa |
| Qboost | 620,0 | m ³ /h |
| Wbep | 172,0 | W |
| WL | 19,00 | W |
| Emiddle | 57 | lux |
| Lwa-SPEmax | 64 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.