

## DOWN DRAFT

### Version

Slim motor 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122348087



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Perimeter suction  
Touch control + 24 h function  
LED lighting  
Top filter, removable and washable  
Optional combined regenerable Carbon.Zeo filter  
Optional remote control

## OPTIONAL ACCESSORIES

**KACL.815**  
Protective cleaning cloths for stainless steel (box 10 pcs)  
**KACL.930**  
Kit filters Carbon.Zeo  
**105080053**  
Remote control

## TECHNICAL FEATURES

**Installation type**  
Worktop  
**Dimensions**  
90 cm  
**Finishing**  
Scotch brite stainless steel (AISI 304)  
White tempered glass  
**Type of control**  
Touch control  
**Speed settings**  
4  
**Lighting**  
Led stripe  
**Filter**  
2 x Metallic filter "Top" - 254x216 mm  
**Charcoal filter**  
Kit filters Carbon.Zeo (optional)

## PACKAGING:WEIGHTS AND VOLUMES

### DOWN DRAFT Gross weight

44 kg

### Net weight

37 kg

### Volumes

0.34 m<sup>3</sup>

### Packaging size

Length

1070 mm

Height

370 mm

Depth

870 mm

### REMOTE MOTOR Slim motor

800 m<sup>3</sup>/h **Gross weight**

10.3 kg

### Net weight

9 kg

### Volumes

0.07 m<sup>3</sup>

### Packaging size

Length

515 mm

Height

440 mm

Depth

320 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

30 W

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

620 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)

400 Pa

### Max. motor power

270 W

## ENERGY CLASS

C

## DOWN DRAFT

### Version

Slim motor 800 m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122348087

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	57	64	67
Capacity (m <sup>3</sup> /h) I.E.C.61591	325	330	550	620
Maximum pressure (Pa)	450	500	400	400
Motor Power (W)	200	230	240	270
Air outlet	220x90	220x90	220x90	220x90

## CAPACITY / PRESSURE

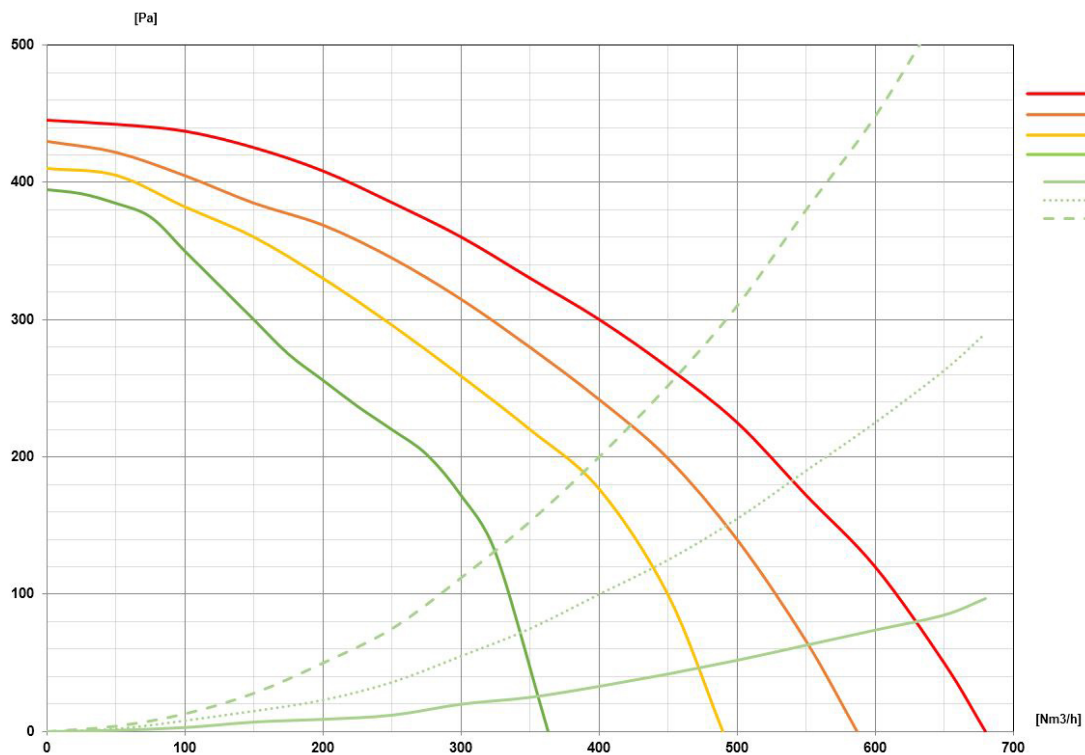

## DOWN DRAFT

### Version

Slim motor 800 m<sup>3</sup>/h


### Collection

Design+

### EAN code

8034122348087

## ENERGY LABEL

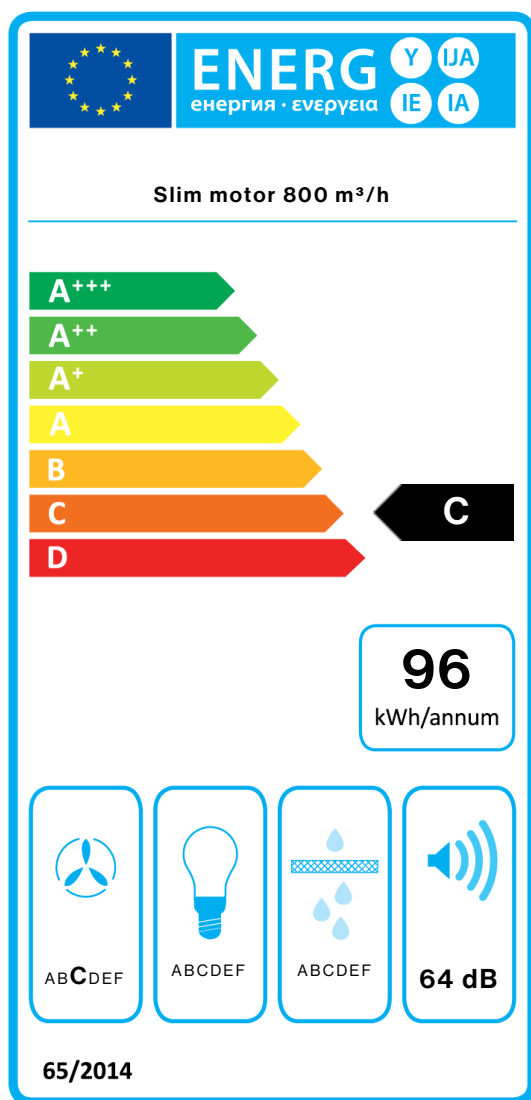

PF		
S	Falmec Spa	
M	Slim motor 800 m <sup>3</sup> /h	
AEC	95,5	kWh/a
EEC	C	
FDE	19,3	
FDEC	C	
LE	3,0	
LEC	G	
GFE	36,0	
GFEC	G	
Qmin	325,0	m <sup>3</sup> /h
Qmax	550,0	m <sup>3</sup> /h
Qboost	620,0	m <sup>3</sup> /h
SPEmin	52	dBa
SPEmax	64	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1.3	
EEL	79,3	
Qbep	440,0	m <sup>3</sup> /h
Pbep	271	Pa
Qboost	620,0	m <sup>3</sup> /h
Wbep	172,0	W
WL	19,00	W
Emiddle	57	lux
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.