

## DOWN DRAFT

Loftmotorer under taget 950 m<sup>3</sup>/h

### Sortiment

Design+

### EAN Kode

8034122348100



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

**Kantsug**  
**Touch control og 24 t. funktion**  
**TOP Vaskbare rustfrie fedtfiltere**  
**Mulighed for Kul/Zeolitfilter.**  
**Regenererbart**  
**Tilvalg fjernbetjening**  
**Motor sold separatly**  
**Mulighed for Connection kogeplade**  
**Strip LED**

## MULIGHEDER FOR TILVALG

### 01-FJERN

Fjernbetjening med display

### 01MO-GAVL

Gavlmotor til udendørs brug  
1000 m<sup>3</sup>/h

### 01MO-GAVL-15

Gavlmotor til udendørs brug  
1500 m<sup>3</sup>/h

### 01MO-LOFT

Loftmotorer under taget 950 m<sup>3</sup>/h

### 01MO-LOFT-13

Loftmotor 1300 m<sup>3</sup> Ø200 mm

### 07MAGIC

Beskyttende rensklude til rustfrit stål. Kasse med 10 klude

### KACL.770#41F

Loftmotorer 1100 m<sup>3</sup>/h  
Brushless

### KACL.784#46F

Slim motor 600 m<sup>3</sup>/h

### KACL.930

Kit kul / zeolitfilter

### KACL.951

Underbase Slim filter unit (h60mm)

## TEKNISK BESKRIVELSE

### Installation

Kogeplade

### Dimensioner

90 cm

### Materiale

Scotch brite rustfrit stål (AISI 304)

Sort tempereret glas

### Betjening

Betjening med touch

### Hastighed

3 + boost

### Belysning

LED stribe

### Filter

2 x Metalfiltere - Top - 254x216 mm

### Kulfilter

Kit kul / zeolitfilter (Tilvalg)

## EMBALLAGE: VÆGT OG VOLUMEN

### DOWN DRAFT Bruttovægt

44 kg

### Nettovægt

37 kg

### Volumen

0.34 m<sup>3</sup>

### Mål på emballage

Længde

1070 mm

Højde

370 mm

Dybde

870 mm

### EKSTERN MOTOR Loftmotorer under taget 950 m<sup>3</sup>/h

### Bruttovægt

10 kg

### Nettovægt

9 kg

### Volumen

0.06 m<sup>3</sup>

### Mål på emballage

Længde

435 mm

Højde

340 mm

Dybde

385 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

30 W

### Spænding

220-240V

### Frekvens

50-60Hz

Shuko

## DATABLAD MOTOR

### Maksimal kapacitet

730 m<sup>3</sup>/h

I.E.C. 61591

### Maksimalt støjniveau

68 dB(A)re1pW

I.E.C.60704-2-13

### Maksimalt tryk (Pa)





580 Pa

### Maksimal sugestyrke

240 W

## ENERGIKLASSE

B

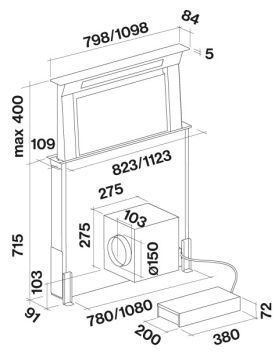

## DOWN DRAFT

Loftmotorer under taget 950  
m<sup>3</sup>/h

### Sortiment

Design+


### EAN Kode

8034122348100

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW</sub> -I.E.C.60704-2-13	51	59	64	68
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	330	480	610	730
Maksimalt tryk (Pa)	460	520	560	580
Forbrug (W)	187	210	225	240
Luftudtag	150	150	150	150

## KAPACITET / TRYK

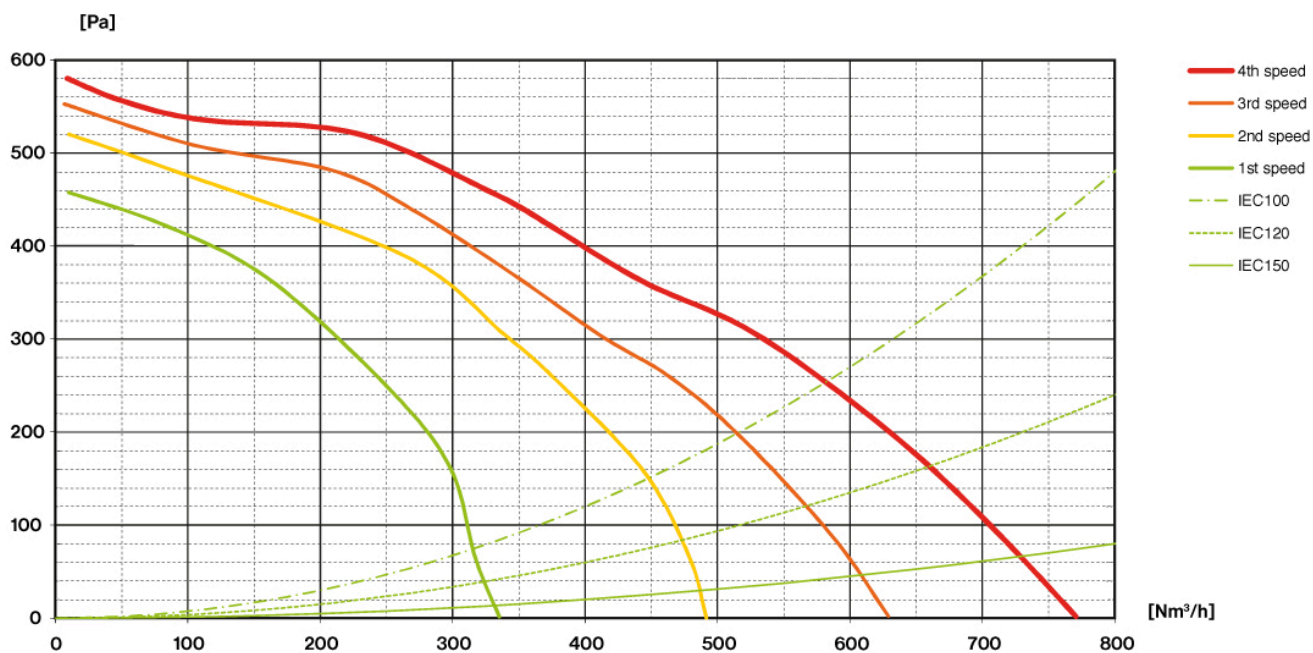

## DOWN DRAFT


Loftmotorer under taget 950  
m<sup>3</sup>/h

### Sortiment

Design+

### EAN Kode

8034122348100

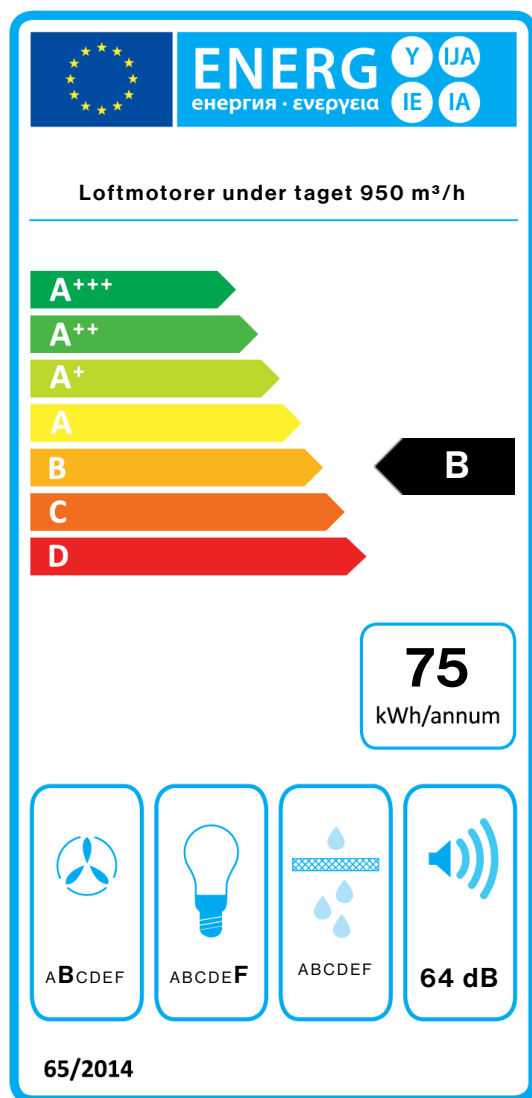

PF		
S	Falmec Spa	
M	Loftmotorer under taget 950 m <sup>3</sup> /h	
AEC	75,4	kWh/a
EEC	B	
FDE	24,6	
FDEC	B	
LE	6,5	
LEC	F	
GFE	36,0	
GFEC	G	
Qmin	330,0	m <sup>3</sup> /h
Qmax	610,0	m <sup>3</sup> /h
Qboost	730,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,95	W
PI		
F	1,1	
EEI	65,2	
Qbep	369,0	m <sup>3</sup> /h
Pbep	422	Pa
Qboost	730,0	m <sup>3</sup> /h
Wbep	176,0	W
WL	6,50	W
Emiddle	42	lux
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.