

MELISSA TULIP

**Version**  
Wall 90 cm - 450 m3/h

**Collection**  
Classic

**EAN code**  
8034122438122



The photograph is purely for information  
It may not correspond to the selected version.

FEATURES

- Painted white steel
- Slider
- Incandescent light
- Metallic grease filter, removable and washable
- Charcoal filter included

TECHNICAL FEATURES

- Installation type**  
Wall
- Dimensions**  
90 cm
- Finishing**  
Painted white steel
- Motor**  
450 m³/h
- Type of control**  
Slider
- Lighting**  
Incandescent 2x18 W
- Filter**  
2 x Metallic filter "Base" - 235x245 mm
- Charcoal filter**  
Round charcoal filter Ø212 mm - Type 2 (included)
- Minimum distance**  
Gas hob: 60 cm  
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**  
24 kg
- Net weight**  
20 kg
- Volumes**  
0.41 m³
- Packaging size**  
Length  
995 mm  
Height  
700 mm  
Depth  
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**  
300 W
- Voltage**  
220-240V
- Frequency**  
50-60Hz
- Plug type**  
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**  
400 m³/h  
I.E.C. 61591
- Maximum noise level**  
57 dB(A)re1pW  
I.E.C.60704-2-13
- Maximum pressure (Pa)**  
500 Pa
- Max. motor power**  
130 W
- ENERGY CLASS**  
D



MELISSA TULIP

**Version**  
Wall 90 cm - 450 m3/h

**Collection**  
Classic

**EAN code**  
8034122438122

MOTOR TECHNICAL SHEET

| Motor speed                                | 1   | 2   | 3   |
|--------------------------------------------|-----|-----|-----|
| Noise level<br>dB(A)re1pW-I.E.C.60704-2-13 | 48  | 53  | 57  |
| Capacity (m3/h)<br>I.E.C.61591             | 250 | 330 | 400 |
| Maximum pressure (Pa)                      | 270 | 400 | 500 |
| Motor Power (W)                            | 70  | 90  | 130 |
| Air outlet                                 | 120 | 120 | 120 |


MELISSA TULIP

Version  
Wall 90 cm - 450 m3/h

Collection  
Classic

EAN code  
8034122438122

ENERGY LABEL

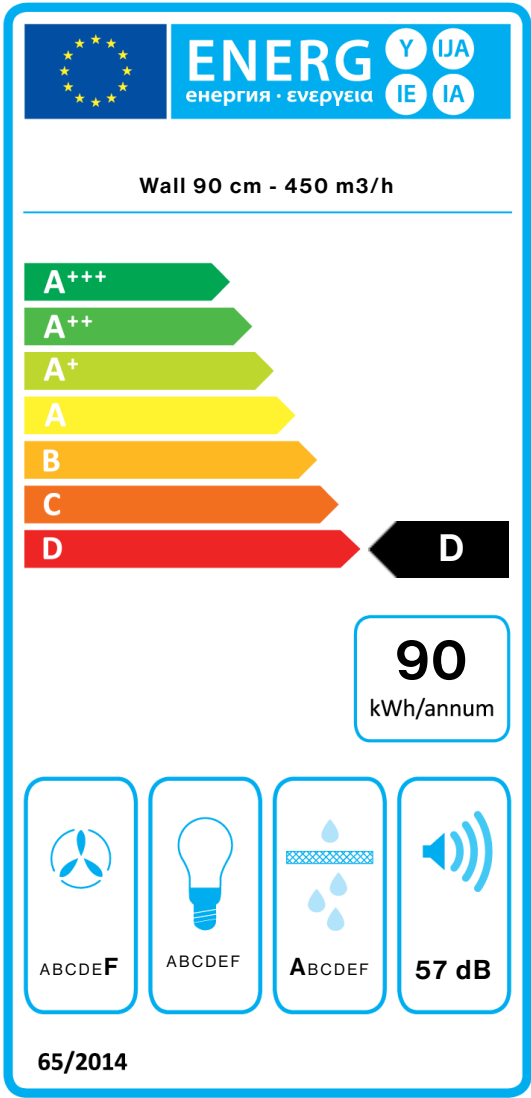

| PF         |                       |       |
|------------|-----------------------|-------|
| S          | Falmec Spa            |       |
| M          | Wall 90 cm - 450 m3/h |       |
| AEC        | 89,7                  | kWh/a |
| EEC        | D                     |       |
| FDE        | 7,4                   |       |
| FDEC       | F                     |       |
| LE         | 1,7                   |       |
| LEC        | G                     |       |
| GFE        | 96,0                  |       |
| GFEC       | A                     |       |
| Qmin       | 250,0                 | m³/h  |
| Qmax       | 400,0                 | m³/h  |
| Qboost     | 400,0                 | m³/h  |
| SPEmin     | 48                    | dBa   |
| SPEmax     | 57                    | dBa   |
| SPEboost   | -                     | dBa   |
| PO         | -                     | W     |
| PS         | 0,00                  | W     |
| PI         |                       |       |
| F          | 1.7                   |       |
| EEL        | 98,5                  |       |
| Qbep       | 190,0                 | m³/h  |
| Pbep       | 140                   | Pa    |
| Qboost     | 400,0                 | m³/h  |
| Wbep       | 100,0                 | W     |
| WL         | 37,90                 | W     |
| Emiddle    | 64                    | lex   |
| Lwa-SPEmax | 57                    | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.